

Residential SuperVent™

PV SERIES AIR ELIMINATOR, 3/4" - 2" PIPE SIZE

SUBMITTAL SHEET

APPLICATION

The Honeywell SuperVent automatically eliminates air and micro-bubbles from hydronic heating and cooling systems without bleeding. The SuperVent guarantees fast start-up with automatic venting, helps prevent corrosion of system components, and improves system efficiency. Additionally, the Honeywell SuperVent micro-bubble concentrator has three times the impact area of other products.

SPECIFICATIONS

Application: Residential or Commercial closed loop hydronic heating or chilled water systems.

Working Pressure: 125 psi maximum

Operating Temperature: 0° F (-17.7° C),
239° F (115° C) maximum

System Shutoff: Brass cap for system shutoff.
System can be air tested.

Flow: Bi-directional

Bottom Connection: 1/2" (12.7mm) NPT connection for field service (cleaning) and Expansion Tank mounting.

NOTE: PVU Universal models bottom connections are the same as inlet and outlet for vertical riser application.


Patent Information: U.S. Patent no. 5,490,874

Warranty: 1 year limited warranty

Made in U.S.A.

Materials

Body	Bronze
Concentrator	Stainless Steel
Float	TPX® Polymethylpentene (PMP)
O-Rings	EPDM Rubber

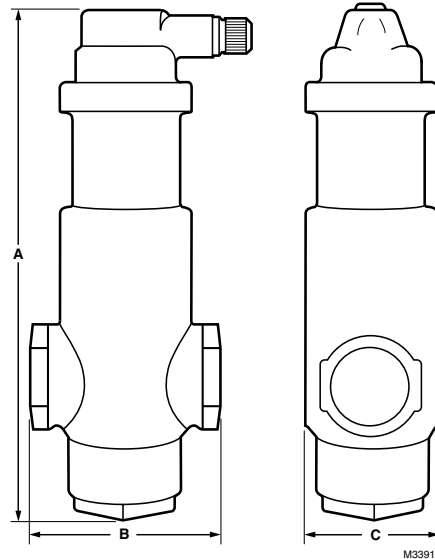

Dimensions

Model Number	Pipe Size	Type	Dimensions in. / (mm)			Cv
			A	B	C	
PV 075	3/4" (19.05)	NPT	7.4" (188)	2.7" (68)	1.9" (48)	13
PV 100	1" (25.4)	NPT	8.1" (206)	3.2" (81)	2.1" (53)	22
PV 125	1 1/4" (31.75)	NPT	8.4" (213)	3.7" (94)	2.5" (63)	38
PV 150	1 1/2" (38.1)	NPT	9.7" (246)	4.3" (109)	3.1" (79)	53
PV 200	2" (50.8)	NPT	10.7" (272)	2.5" (63)	4" (101)	95
PV 075S	3/4" (19.05)	Sweat	7.4" (188)	2.7" (68)	1.9" (48)	13
PV 100S	1" (25.4)	Sweat	8.1" (206)	3.2" (81)	2.1" (53)	22
PV 125S	1 1/4" (31.7)	Sweat	8.4" (213)	4.4" (112)	2.5" (63)	38
PV 150S	1 1/2" (38.1)	Sweat	9.7" (246)	5.4" (137)	3.1" (79)	53
PV 200S	2" (50.8)	Sweat	10.7" (272)	7" (178)	4" (102)	95
PVU 075	3/4" (19.05)	NPT	7.8" (198)	2.7" (68)	1.9" (48)	3.6
PVU 100	1" (25.4)	NPT	8.4" (213)	3.2" (81)	2.1" (53)	6.2
PVU 125	1 1/4" (31.75)	NPT	8.9" (226)	3.7" (94)	2.5" (63)	10.5
PVU 150	1 1/2" (38.1)	NPT	10" (254)	4.3" (109)	3.1" (79)	14.3

Job Name _____
 Engineer _____
 Mechanical Contractor _____
 Contractor's P.O. No. _____
 Representative _____
 Notes _____


Model(s)

_____ Qty. _____ Notes _____
 _____ Qty. _____ Notes _____
 _____ Qty. _____ Notes _____

Approval _____


Service _____

Tag No. _____



SUPERVENT CONCENTRATOR


The Stainless Steel Concentrator is a patented and a more efficient way to eliminate air (US Patent No. 5,490,874). The Stainless Steel Concentrator is removable for easy cleaning.

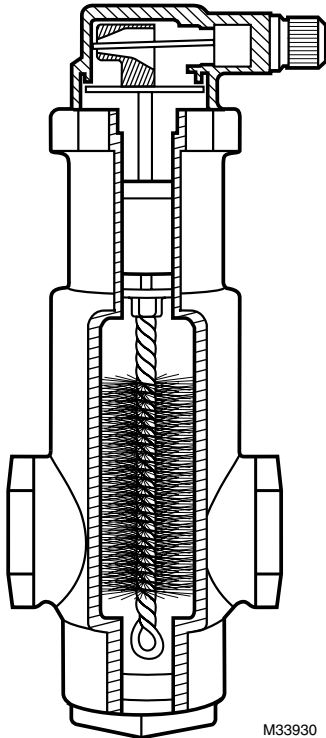

For more information on cleaning refer to form 62-3069.

AIR VENT

The PV Series SuperVents come with an adjustable collar ring that allows the air vent to be turned a full 360 degrees, giving the SuperVent much more flexibility for installation than the traditional air vent.

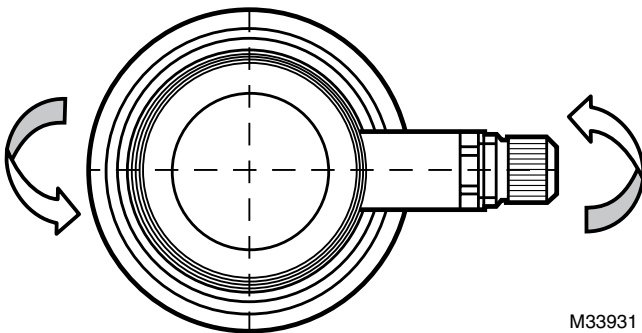

INSTALLATION

- Locate where you would normally locate air purger or air scoops
- Must be installed in a horizontal line
- Straight pipe runs up or downstream not required.
- Bi-directional.
- During normal operation, back off brass cap one turn.
- Tighten vent cap only when checking out system for leaks.

ADDITIONAL SPECIFICATIONS

- High Temperature Thermoplastic Float controls venting rate under continuous operation.
- Encapsulated O-Ring for leakproof cap seal.
- Debris baffle to control dirt fouling and prevent failure.
- Brass Bottom Plug for expansion tank mounting, ease of installation and maintenance.
- No-ClogVent for peace of mind, no leaking or callbacks.

SuperVent Models

Connection Type	Model Number	Size in. / (mm)	Max. Diameter in. / (mm)	Lbs. (Kg)
Female NPT	PV 075	¾" (19.05) Bottom Inlet	1 13/16 (46)	2 (0.91)
	PV 100	1" (25.4) Bottom Inlet	2 3/32 (53)	2.75 (1.24)
	PV 125	1 ¼" (31.75) Bottom Inlet	2 1/2 (64)	3.5 (10.66)
	PV 150	1 ½" (38.1) Bottom Inlet	3 3/32 (79)	5 (2.27)
	PV 200	2" (50.8) Bottom Inlet	4 (102)	8 (3.63)
	PVU 075	¾" (19.05) Bottom Inlet	1 13/16 (46)	2.1 (0.95)
	PVU 100	1" (25.4) Bottom Inlet	2 3/32 (53)	2.8 (1.27)
	PVU 125	1 ¼" (31.75) Bottom Inlet	2 1/2 (64)	3.6 (1.63)
	PVU 150	1 ½" (38.1) Bottom Inlet	3 3/32 (79)	5.2 (2.36)
Sweat	PV 075S	¾" (19.05) Bottom Inlet	1 13/16 (46)	2 (0.91)
	PV 100S	1" (25.4) Bottom Inlet	2 3/32 (53)	2.75 (1.24)
	PV 125S	1 ¼" (31.7) Bottom Inlet	2 1/2 (64)	3.5 (1.59)
	PV 150S	1 ½" (38.1) Bottom Inlet	3 7/64 (79)	5 (2.27)
	PV 200S	2" (50.8) Bottom Inlet	4 1/64 (102)	8 (3.63)

Honeywell

Automation and Control Solutions
Honeywell International Inc.
1985 Douglas Drive North
Golden Valley, MN 55422
customer.honeywell.com

© U.S. Registered Trademark
© 2014 Honeywell International Inc.
63-1378—02 M.S. 10-14
Printed in United States