


20A Twist-Lock Devices

**20 Amp, 125, 250 Volts
and 277 Volts AC
2 Pole, 3 Wire, Grounding**



20A 125V NEMA L5-20P 1 HP	20A 250V NEMA L6-20P 2 HP	20A 277V AC NEMA L7-20P 2 HP
--	--	---

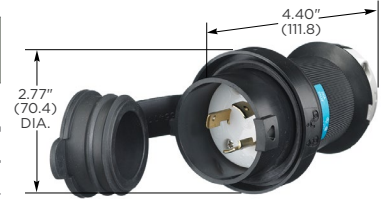

HBL2321SW

Plugs

Watertight Safety-Shroud®

IP66 SUITABILITY

UL Type 4X, 12

Description	Cord Dia.	Catalog Number		
Black Valox® housing, white Valox clamps.	.360"-.930" (9-24)	HBL2311SW	HBL2321SW	HBL2331SW

Safety-Shroud®

IP20 SUITABILITY

Description	Cord Dia.	Catalog Number		
Black and white nylon body, white Valox shroud. Can be used with the Insulgrip® Connector Bodies.	.360"-.930" (9-24)	HBL2311S	HBL2321S	HBL2331S

Insulgrip

IP20 SUITABILITY

Description	Cord Dia.	Catalog Number		
Black and white nylon.	.360"-.930" (9-24)	HBL2311	HBL2321	HBL2331
Black and white nylon, spring termination.	.360"-.930" (9-24)	HBL2311ST	HBL2321ST	HBL2331ST
Corrosion resistant, yellow nylon.	.360"-.930" (9-24)	HBL23CM11	HBL23CM21	—
All black nylon.	.360"-.930" (9-24)	HBL2311BK	HBL2321BK	—
All black nylon, spring termination.	.360"-.930" (9-24)	HBL2311STBK	HBL2321STBK	—
Cord clamps with removable inserts. All black nylon.	.360"-.930" (9-24)	HBL2311EBK	HBL2321EBK	—

Note: See page C-53 for accessories.



Valise®

IP20 SUITABILITY

Description	Cord Dia.	Catalog Number		
Yellow nylon.	.325"-.720" (8.26-18.3)	HBL2311VY	HBL2321VY	HBL2331VY
Corrosion resistant, yellow nylon.	.325"-.720" (8.26-18.3)	HBL23CM11V	—	—
Black nylon.	.325"-.720" (8.26-18.3)	HBL2311VBK	HBL2321VBK	HBL2331VBK

Note: See page C-53 for accessories.



HBL2321S



HBL2311

Flanged Inlets

Watertight Safety-Shroud

IP66 SUITABILITY

UL Type 4X, 12

Description	Catalog Number		
Gray Valox housing and flange.	HBL2315SW	HBL2325SW	HBL2335SW
Gray Valox housing and flange, reverse service (not shown).	—	HBL2325SWR	—

Note: See page C-54 for accessories.

Insulgrip

IP20 SUITABILITY

Description	Catalog Number		
Nylon casing, back wired.	HBL2315	HBL2325	HBL2335
Nylon casing, spring termination.	HBL2315ST	HBL2325ST	HBL2335ST


Note: See page C-52 for accessories.

See pages C-69 and C-70 for technical information on Twist-Lock and Watertight Safety-Shroud devices.

See page C-74 for technical information on Valise® plugs and connectors.



HBL2311ST



HBL2325SW


Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.



HBLMITL - For use with Watertight Safety-Shroud receptacles, see page C-48.



HBL2315ST



HBL2315

Dimensions in Inches (mm)