


# Terminal Strips

- Heavy-duty, corrosion-resistant screws, surface plates and optional hardware
- Accessory hardware provides a variety of termination options
- Available cover helps prevent contact with live terminals
- Rugged polyester thermoplastic base (UL Rated 94V-0)
- Operating temperature rated from 130°C (260°F) to -40°C (-40°F)
- UL Recognized (E82048) and CSA Certified (LR15364)

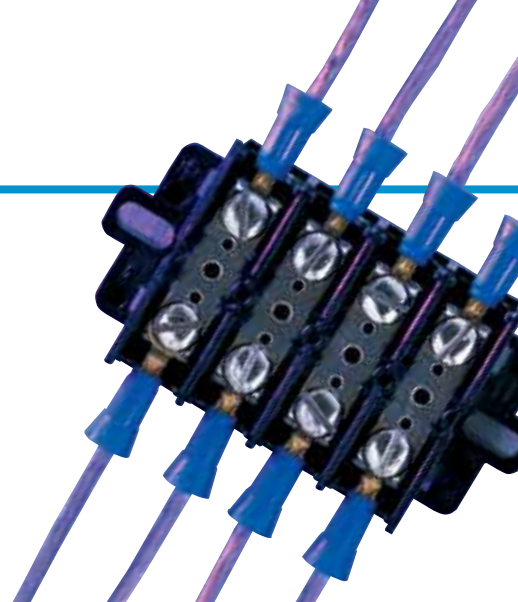

| No. of Poles                                                                                            | Center Spacing     | Wire Range (AWG Cu) | Recommended Torque | Terminal Screw Size                 | Cat. No. |
|---------------------------------------------------------------------------------------------------------|--------------------|---------------------|--------------------|-------------------------------------|----------|
| 89-200 Series, 30A/600V UL/CSA (Max. electrical rating 30A/250V when used with optional quick connects) |                    |                     |                    |                                     |          |
| 2                                                                                                       | .562 in. (14.28mm) | 22 – 10             | 16 in. - lb.       | #8-32 Philslot<br>Zinc-Plated Steel | 89-202   |
| 3                                                                                                       |                    |                     |                    |                                     | 89-203   |
| 4                                                                                                       |                    |                     |                    |                                     | 89-204   |
| 6                                                                                                       |                    |                     |                    |                                     | 89-206   |
| 8                                                                                                       |                    |                     |                    |                                     | 89-208   |
| 10                                                                                                      |                    |                     |                    |                                     | 89-210   |
| 12                                                                                                      |                    |                     |                    |                                     | 89-212   |
| 89-300 Series, 30A/300V UL/CSA (Max. electrical rating 15A/125V when used with optional quick connects) |                    |                     |                    |                                     |          |
| 2                                                                                                       | .375 in. (9.52mm)  | 22 – 14             | 9 in. - lb.        | #6-32 Philslot<br>Zinc-Plated Steel | 89-302   |
| 4                                                                                                       |                    |                     |                    |                                     | 89-304   |
| 6                                                                                                       |                    |                     |                    |                                     | 89-306   |
| 8                                                                                                       |                    |                     |                    |                                     | 89-308   |
| 10                                                                                                      |                    |                     |                    |                                     | 89-310   |
| 12                                                                                                      |                    |                     |                    |                                     | 89-312   |
| 89-400 Series, 30A/300V UL/CSA                                                                          |                    |                     |                    |                                     |          |
| 2                                                                                                       | .437 in. (11.10mm) | 22 – 12             | 9 in. - lb.        | #6-32 Philslot<br>Zinc-Plated Steel | 89-402   |
| 4                                                                                                       |                    |                     |                    |                                     | 89-404   |
| 6                                                                                                       |                    |                     |                    |                                     | 89-406   |
| 8                                                                                                       |                    |                     |                    |                                     | 89-408   |
| 10                                                                                                      |                    |                     |                    |                                     | 89-410   |
| 12                                                                                                      |                    |                     |                    |                                     | 89-412   |

| No. of Poles                                                                                                                                     | Center Spacing     | Wire Range (AWG Cu) | Recommended Torque | Terminal Screw Size                   | Standard Black Cat. No. | Shorting Block Cat. No. |
|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------------|--------------------|---------------------------------------|-------------------------|-------------------------|
| <b>89-500 Series, 60A/600V UL/CSA (Max. electrical rating 60A/600V achieved only when used with #6 AWG copper wire crimped to ring terminal)</b> |                    |                     |                    |                                       |                         |                         |
| 4                                                                                                                                                | .625 in. (15.88mm) | 22 – 6              | 20 in. - lb.       | #10-32 Slotted<br>Nickle-Plated Brass | <b>89-504</b>           | <b>89-505</b>           |
| 6                                                                                                                                                |                    |                     |                    |                                       | <b>89-506</b>           | <b>89-507</b>           |
| 8                                                                                                                                                |                    |                     |                    |                                       | <b>89-508</b>           | <b>89-509</b>           |
| 12                                                                                                                                               |                    |                     |                    |                                       | <b>89-512</b>           | <b>89-513</b>           |

Standard Block



Shorting Block

