



Brenham™
Wall-Mount Bathroom Sink
K-1997-SS1R

Features

- With hanger
- With overflow
- Single-hole faucet drilling
- Soap dispenser hole on right
- 21-15/16" (557 mm) x 19-3/4" (502 mm)
- Antimicrobial finish inhibits the growth of mold-, mildew-, stain-, and odor-causing bacteria on the fixture surface. This product does not protect users against bacteria, viruses, or other disease organisms. Always clean and wash this product thoroughly before and after each use

Material

- Vitreous china

Installation

- Wall-mount
- Drilled for concealed arm carrier installation

Optional Products/Accessories

- K-1998 Shroud
- K-8998 P-Trap



ADA **CSA B651** **OBC**

Codes/Standards

ASME A112.19.2/CSA B45.1
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty



See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

	0	White
---	---	-------

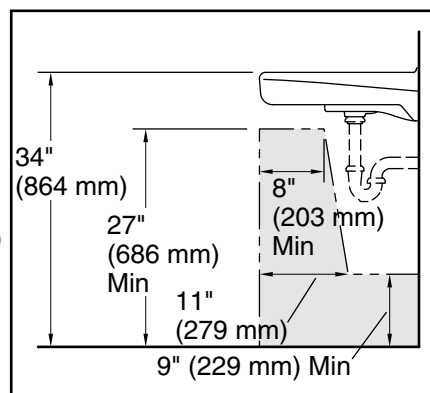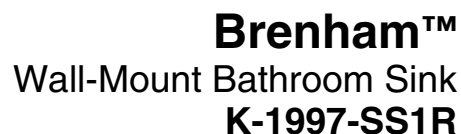

Technical drawing of a standard installation of a 12-inch horizontal pipe with a 12-inch vertical riser. The drawing shows the pipe, riser, and various dimensions for installation. Key dimensions include:

- 31" (787 mm) - Total height
- 29-1/8" (714 mm) - Riser height
- 9-1/16" (14 mm) - Pipe height
- 21-15/16" (557 mm) - Riser offset
- 9-1/4" (235 mm) - Riser offset
- 1-1/2" (38 mm) - Riser offset
- 3-1/2" (89 mm) - Riser offset
- 6-1/2" (165 mm) - Riser offset
- 7-3/4" (197 mm) - Riser offset
- 28-1/2" (724 mm) - Riser offset
- 4" (102 mm) - Riser offset
- 3/8" (9.5 mm) - Riser offset for Hot and Cold connections
- 1-1/4" (31.8 mm) - Riser offset for OD
- Concealed Arm Hole Locations

Standard Installation

Notes

NOTES
Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Drain hole: 1-3/4" (44 mm)