

Features

- Multifunction handshower offers three spray experiences: wide coverage, intense drenching, and targeted
- Wide coverage spray produces an encompassing spray for everyday use
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Handshower holder pivots to adjust the angle of the spray
- Simple thumb tab smoothly transitions between sprays
- Single-function rainhead
- A single handle controls both on/off activation and temperature setting
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.5 gpm (9.5 lpm) maximum flow rate at 45 psi (3.1 bar)
- 60" (1524 mm) hose length
- Adjustable mounting brackets offer installation flexibility
- Includes handshower, rainhead, rainhead arm with flange, wall-mount supply elbow with check valve, 30" (762 mm) slidebar, 60" (1524 mm) hose, valve trim, mounting hardware

Material

- KOHLER finishes resist corrosion and tarnishing

Installation

- Requires K-8304 or K-28304 series valve (sold separately)
- Requires K-728-K series transfer valve or K-737-K series diverter valve (sold separately)

Included Components

K-10124 Right-angle Shower Arm and Flange
K-22172 Wall-mount supply elbow with check valve
K-72415-Y Four-function handshower, 2.5 gpm
K-76464-Y 8" single-function rainhead, 2.5 gpm
K-9514 60" Shower Hose
K-98342 30" deluxe slidebar
K-T97091-4 MasterShower® transfer valve trim with lever handle
K-TS74042-4 Rite-Temp® valve trim



Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass

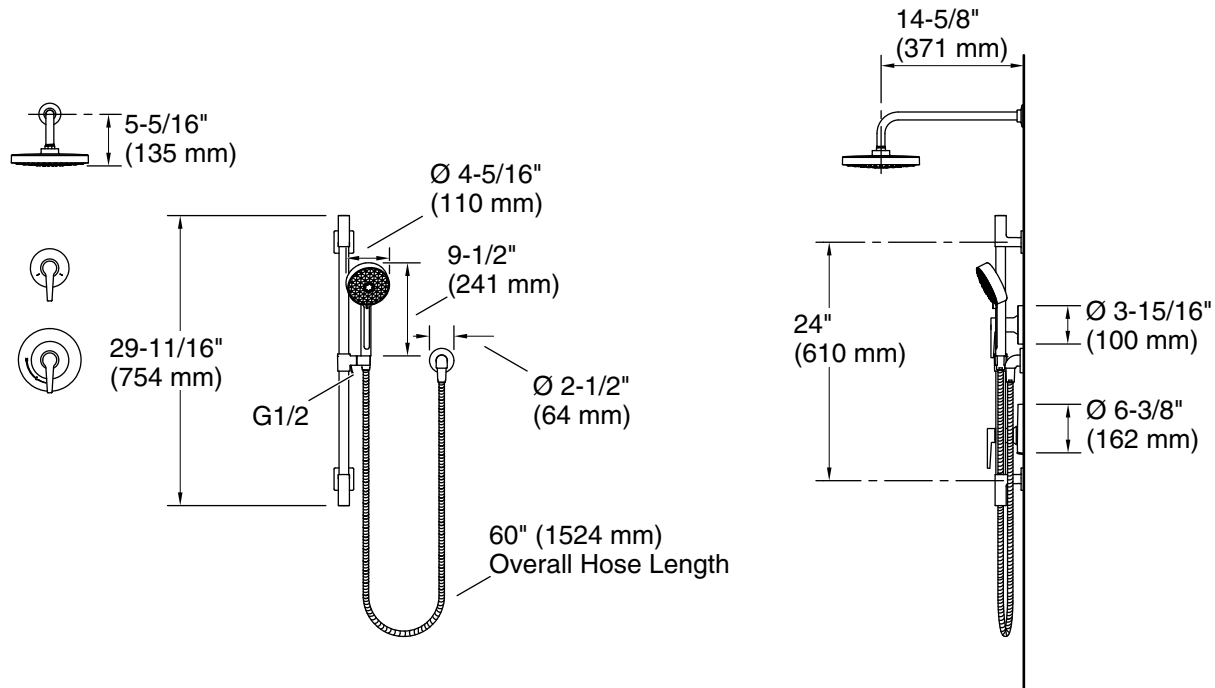

Technical Information

All product dimensions are nominal.

Spout:

Handshower rated max flow:	2.5 gal/min (9.5 l/min)
Shower/Rainhead rated max flow:	2.5 gal/min (9.5 l/min)

Shower Valve:

Flow Rate (Max) @ 45 psi	2.5 gal/min (9.5 l/min)
Manufacturer's minimum rated flow:	2.5 gal/min (9.5 l/min)
Pressure:	45 psi (3.1 bar)
Maximum (Static) Pressure:	125 psi (8.6 bar)
Minimum (Operating) Pressure:	15 psi (1 bar)

Notes

Install this product according to the installation instructions.

For use with showerheads or handsprays rated at 2.5 gal/min (9.5 l/min) or higher.