

### Features

- Contains electronic mixing valve to operate K-29179 Purist® Suspend ceiling-mount kitchen sink faucet

### Installation

- Requires K-29179 for installation

### Required Products/Accessories

For wall-mount installation

K-29179 Ceiling-mount kitchen sink faucet



### Codes/Standards


ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

**KOHLER® Faucet Lifetime Limited  
Warranty KOHLER® Electronic  
Faucets, Valves, and Controls Five-  
Year Limited Warranty**

See website for detailed warranty information.

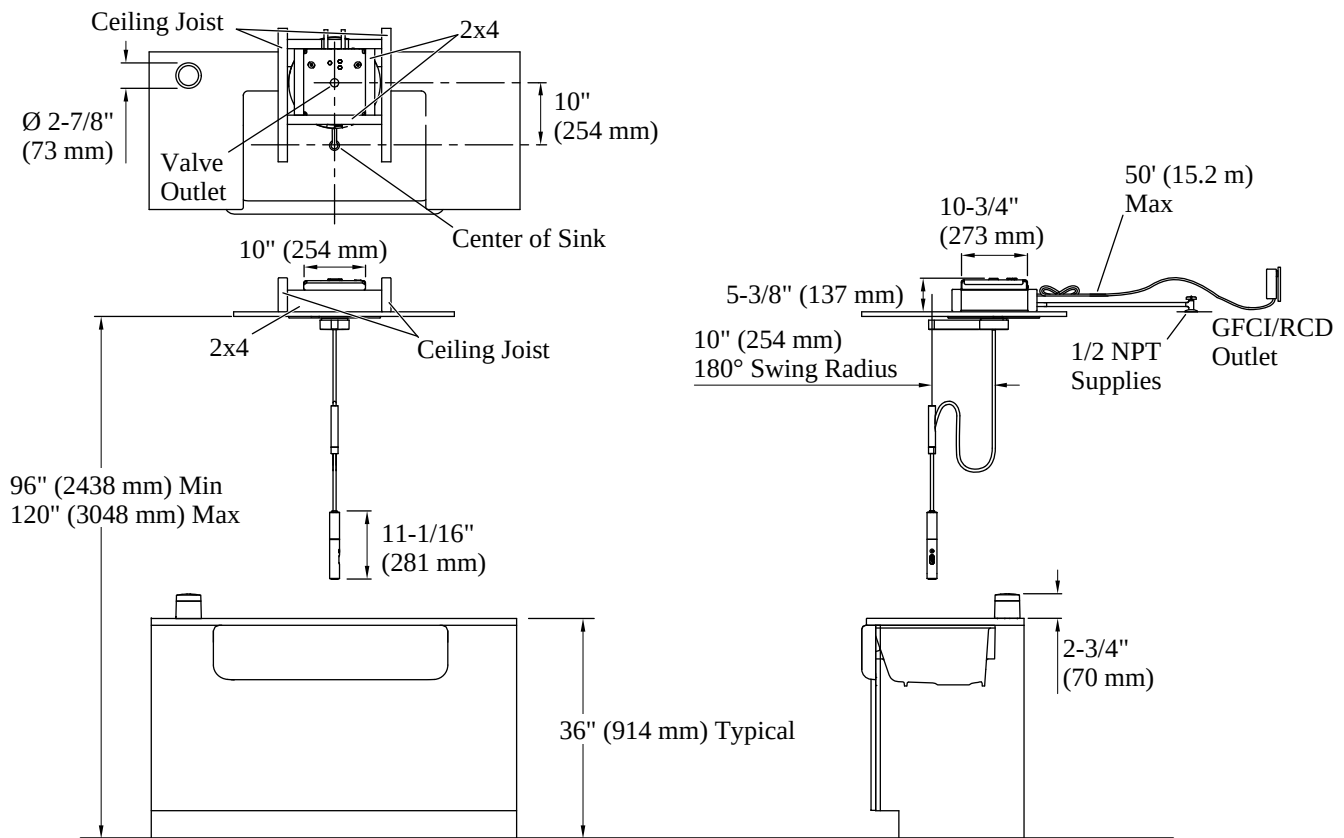

### Required Electrical Service

One dedicated circuit required.

Thermostatic valve: 110/220 V, 50/60 Hz

### Technical Information

All product dimensions are nominal.

Power source: Plug - AC, included

Faucet flow rate: 1.5 gal/min (5.7 l/min)

Electrical component Thermostatic valve: 110/220 V rating:

### Spout:

### Notes

Install this product according to the installation instructions.

This faucet should not be installed in a location where there is a vaulted ceiling.

The rough-in box must be installed in line with the ceiling joists. Angular installation can damage the structural integrity of the ceiling joists.

Access must be provided for supply stops and electrical outlet.

The ceiling must be level.