

### Features

- Quarter-turn washerless ceramic disc valves
- 3-15/16" (100 mm) spout reach
- Vandal-resistant aerated flow
- Wristblade Lever handles
- Less drain
- 0.5 gpm (1.9 lpm) maximum flow rate at 60 psi (4.14 bar)

### Material

- Solid-brass construction for durability and reliability
- Brass valve bodies

### Installation

- For 4" (102 mm) centers



|     |          |     |
|-----|----------|-----|
| ADA | CSA B651 | OBC |
|-----|----------|-----|

### Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 61  
NSF/ANSI/CAN 372  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

|                                                                                     |    |                 |
|-------------------------------------------------------------------------------------|----|-----------------|
|  | CP | Polished Chrome |
|-------------------------------------------------------------------------------------|----|-----------------|

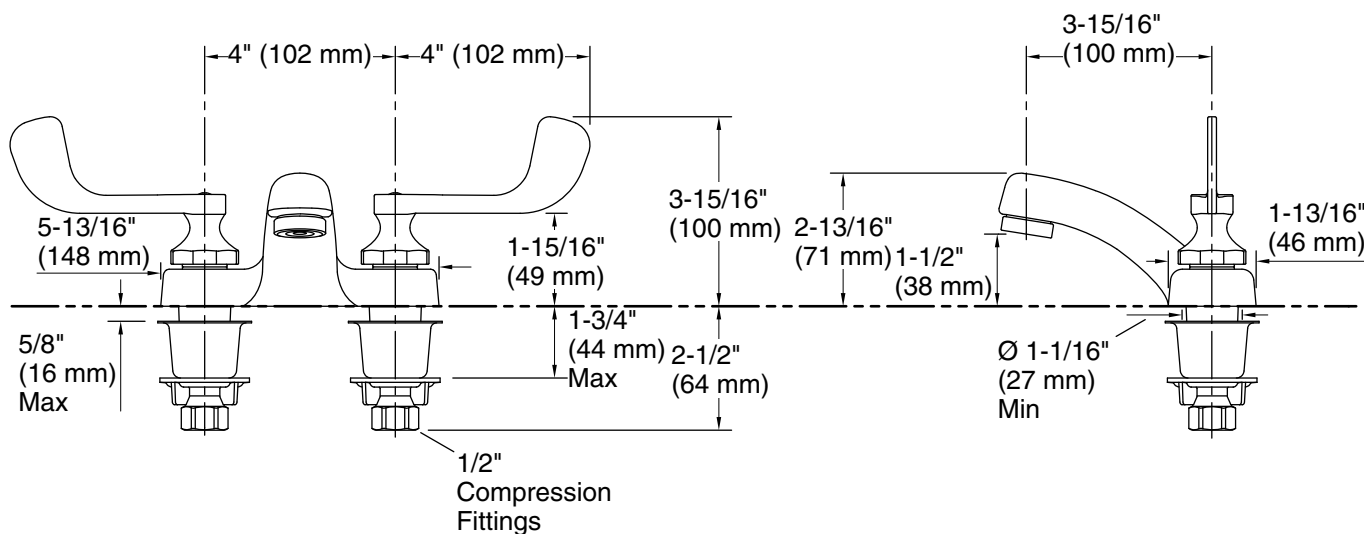

## Technical Information

All product dimensions are nominal.

Faucet flow rate: 0.5 gal/min (1.9 l/min)

## Spout:

Spout reach: 3-15/16" (99 mm)

## Notes

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.