

### Features

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Antiscald protection
- A single handle controls both on/off activation and temperature setting
- Includes diverter bath spout with 1/2" slip-fit connection
- For use with any KOHLER showerhead (sold separately)
- Coordinates with other products in the Parallel collection

### Material

- Premium material construction with metal handle ensures reliability and durability
- KOHLER finishes resist corrosion and tarnishing

### Installation

- Trim only; requires valve to complete installation (sold separately)

### Required Products/Accessories

K-8304 Series Rite-Temp® Valve & Cartridge Kits

or

K-8300 Series Rite-Temp® Valve Body Rough-ins

K-8305 Series Rite-Temp® Cartridges

### Optional Products/Accessories

K-10350 Deep rough-in kit

K-10351 Test cap for K-8300 Series valve bodies

1307346 Retro mixer cap for K-304 Rite-Temp valve

1362395 Retro mixer cap for K-2971 HiFlow Rite-Temp valve

### Codes/Standards

ASME A112.18.1/CSA B125.1

California Energy Commission (CEC)


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes


*Color tiles intended for reference only.*

| Color                                                                               | Code | Description                    |
|-------------------------------------------------------------------------------------|------|--------------------------------|
|    | CP   | Polished Chrome                |
|    | SN   | Vibrant® Polished Nickel       |
|    | AF   | Vibrant® French Gold           |
|    | BN   | Vibrant® Brushed Nickel        |
|    | BV   | Vibrant® Brushed Bronze        |
|   | BL   | Matte Black                    |
|  | 2MB  | Vibrant® Brushed Moderne Brass |
|  | TT   | Vibrant Titanium               |
|  | BGP  | Vibrant Brushed Graphite       |

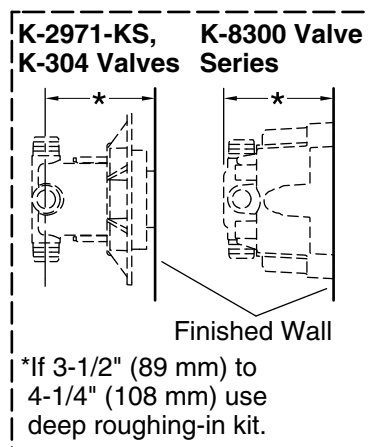

### Slip-fit Spout:

Extend 1/2" OD copper tube 1-1/4" (32 mm) minimum and 1-3/8" (35 mm) maximum from finished wall.

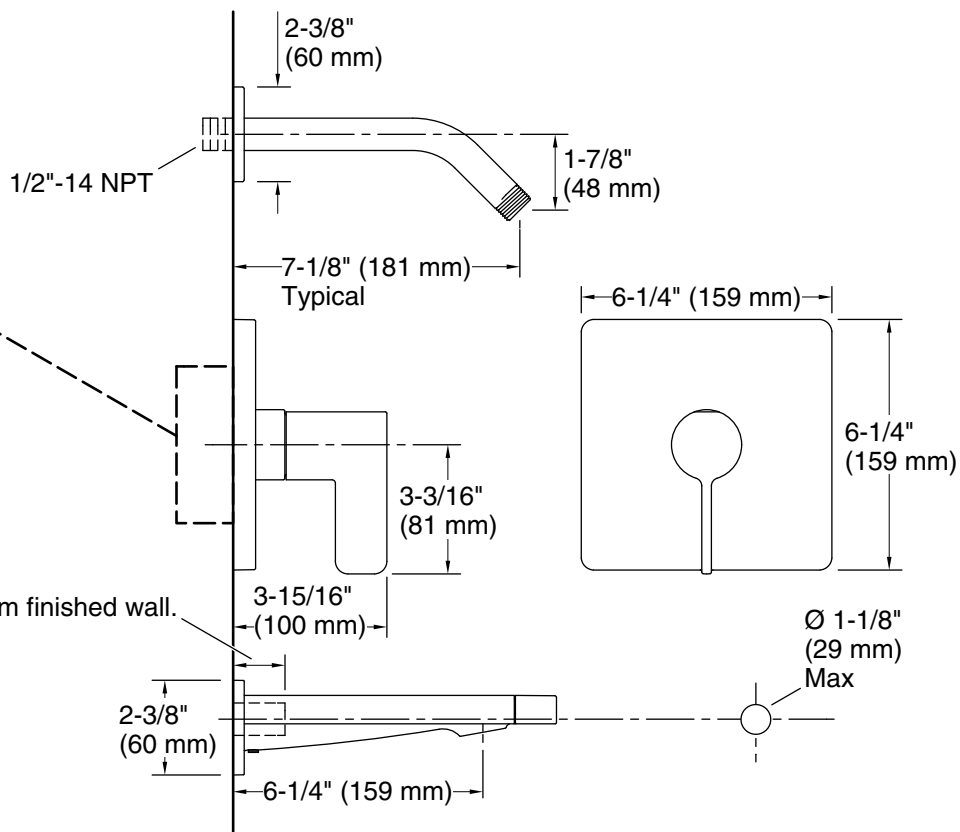

### Technical Information

All product dimensions are nominal.

### Spout:

Spout reach: 6-1/4" (159 mm)

### Notes

Install this product according to the installation instructions.