

### Features

- Touch-activated opening and closing
- Flexible overflow joint conforms to various bath angles
- Includes tee, drain ell, and overflow ell with attached 1-1/2" OD pipe
- Toe-tap actuation means no internal linkages, reducing potential clogging through the overflow
- Copper corrugated neck makes drain easy to install on any bath slope
- For use with 20" - 26" (508 - 660 mm) deep baths

### Material

- Solid-brass construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing
- 17-gauge brass pipe

### Installation

- Above- or through-the-floor

### Recommended Products/Accessories

K-23726 Drain treatment



### Codes/Standards











ASME A112.18.2/CSA B125.2


### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass
	TT	Vibrant Titanium
	BGP	Vibrant Brushed Graphite
	DR	Deep Bronze

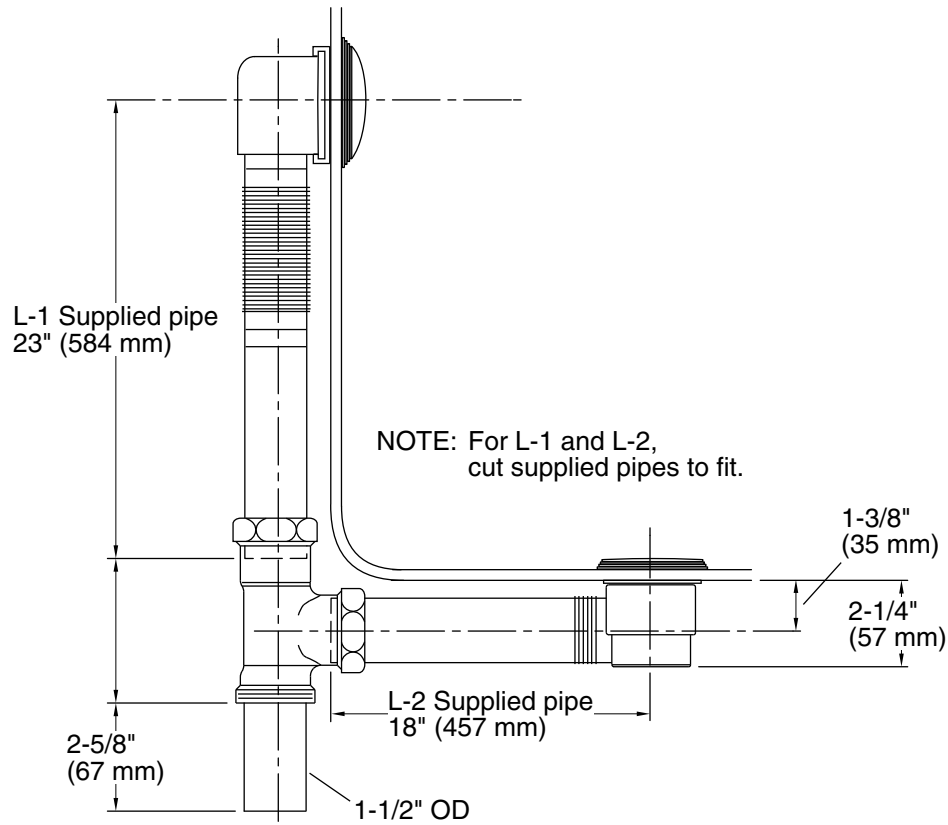

### Technical Information

All product dimensions are nominal.

Material: Brass

### Notes

Install this product according to the installation instructions.