



CARBON MONOXIDE ALARM with Digital Display

ITEM 21033779 | MODEL COPD

Plug-In + AA Backup Batteries (INCLUDED)



Images are representative only. Actual product may vary slightly.

Description

When you're on the job, there's no room for uncertainty. Built for pros, the Kidde Carbon Monoxide Alarm (model COPD) delivers dependable, code-compliant detection — backed by North America's #1 home fire safety brand.*

This plug-in alarm with 2 AA backup batteries meets UL 2034 5th Edition standards. You'll also find key features both you and your customers will appreciate, like a rotating plug, backlit digital display, self-testing capability and event memory.

Features & Benefits

- **Alarms at Dangerous Levels of CO** – Notifies you when it's time to evacuate to fresh air outside
- **Easy-to-Read Backlit Display** – With the press of a button, check the alarm status, even in the dark
- **No Low Battery Chirps at Night** – Alarm senses when it's dark, so you won't be disturbed by alerts that aren't critical
- **Power Surge Immunity** – Helps you stay protected during voltage fluctuations and power surges
- **End-of-Life Notifications** – Eliminate the guesswork with replacement reminders after 10 years
- **Rotating Plug + 2 AA Backup Batteries** – Turns 90° to install upright in most outlets and backup batteries provide temporary power during short-term outages

Ordering Information


Ordering Number	UPC	GTIN	Pack	Case Dimensions (D x W x H in)	Case Weight (lbs)	Cartons/Pallet
21033779	047871337798	10047871337795	6 / case	15.67 x 6.3 x 6.06	4.35	108

*Based on total household installations as of December 2023.

Model Specifications

Alarm Indications	Audible Alarm: 85 dB at 10 ft
	CO sensor alarm times: 70 ppm: 60-240 min, 150 ppm: 10-50 min, 400 ppm: 4-15 min.
	Green LED = power
	Amber LED = fault conditions
Power & Battery	Red LED = alarm
	Plug-In + AA Backup Batteries (included)
	120VAC, 60Hz, 30mA, with 2 AA backup batteries
	Replacement Batteries: Energizer E91, Gold Peak 15A or Golden Power GLR6A. NOTE: Do not use Lithium batteries in this unit.
Functional Features	Test/Hush Button (simulates CO)
	Alarm Auto Reset After Hushing
Compliance & Listings	ETL Listed
	UL 2034, 5th Edition
	NFPA 72
	NFPA 101 (one- and two-family dwellings)
	Federal Housing Authority (FHA)
	Housing and Urban Development (HUD)
Architectural / Engineering	California State Fire Marshal (CSFM)
	Housing: PVC
	Green / Red / Amber LED Indicators
	Sounder: ≥85 dB
Technical	Model: COPD
	Sensor: Electrochemical CO
	Temp: 40 °F (4.4 °C) to 100 °F (37.8 °C)
	Humidity: 10 to 95% relative humidity (RH), non-condensing
	Dimensions: 2.90" W x 1.52" D x 5.47" H
Warranty	Weight: 0.33 lb.
	10-Year Limited (excludes batteries)
User Guide Languages	English / Spanish

Product Dimension (in)

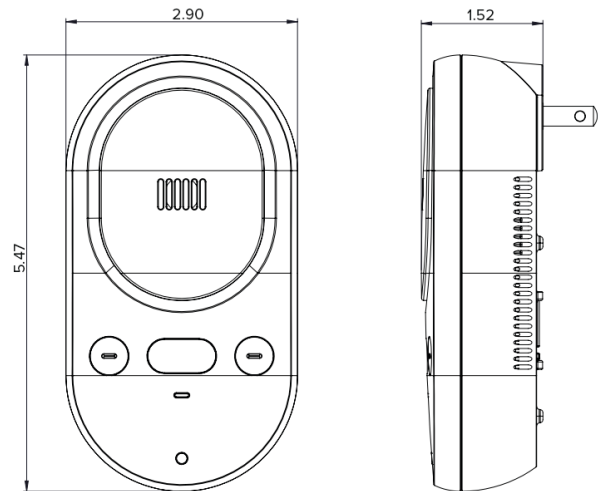

Installation of Alarm**

This model meets the latest carbon monoxide standards. Industry experts recommend a CO alarm be installed on each level of the home — ideally on any level with fuel-burning appliances and outside of sleeping areas. See User Guide for more location information and additional instructions. The alarm should be installed to comply with all local codes having jurisdiction in your area.

Alarm Warnings — Featuring multi-color LEDs

- **CO Alarm:** Red LED blinks 4 times every 5 sec in sync with 4 short beeps. On DC power only, after 4 mins, the CO alarm pattern will occur every 60 sec.
- **CO Alarm Memory:** Red LED blinks twice every 15 sec if CO has been detected for up to 7 days.
- **End of Unit Life:** Amber LED blinks 2 times every 60 sec. in sync with 2 chirps.
- **Low Battery Alert:** Amber LED blinks every 6 sec + single chirp every 60 sec.
- **CO Fault:** Amber LED blinks twice every 60 sec + 3 chirps every 60 sec.

▲ WARNING: This product is intended for use in indoor residential locations. It is not designed to measure compliance with Occupational Safety and Health Administration (OSHA) commercial or industrial standards. This device is designed to help protect individuals from acute effects of carbon monoxide exposure. It will not fully safeguard individuals with specific medical conditions. If in doubt, consult a medical practitioner. Individuals with medical problems may consider using warning devices which provide audible and visual signals for carbon monoxide concentrations under 30 ppm.

**For technical information only. Not for installation use. See User Guide for installation and safety information.

THE RIGHT SUPPORT, RIGHT WHEN YOU NEED IT.

Get the answers you're looking for, with a dedicated customer service line for pros. Call **Kidde Pro Support** at **1-888-422-6402**.