



EXPLOSIVE GAS + CARBON MONOXIDE ALARM

ITEM 21033781 | MODEL COPDLG

Plug-In + AA Backup Batteries (INCLUDED)



Images are representative only. Actual product may vary slightly.

Description

When you're on the job, there's no room for uncertainty. Built for pros, the Kidde Explosive Gas + Carbon Monoxide Alarm (model COPDLG) delivers dependable, code-compliant detection — backed by North America's #1 home fire safety brand.*

This plug-in alarm with 2 AA backup batteries meets UL 2034 5th Edition (CO) and UL 1484 6th Edition (Gas) standards. You'll also find key features both you and your customers will appreciate, like low-level CO alerts,¹ backlit digital display, self-testing capability and event memory.

Features & Benefits

- **Detects Natural Gas and Propane** – For added assurance, get alerted to natural gas and propane leaks in your home
- **Low-Level CO Alerts** – Take action against CO sooner and help protect your family and pets¹
- **Easy-to-Read Backlit Display** – With the press of a button, check the alarm status, even in the dark
- **Alarms at Dangerous Levels of CO** – Notifies you when it's time to evacuate to fresh air outside
- **No Low Battery Chirps at Night** – Alarm senses when it's dark, so you won't be disturbed by alerts that aren't critical
- **End-of-Life Notifications** – Eliminate the guesswork with replacement reminders after 7 years

Ordering Information

Ordering Number	UPC	GTIN	Pack	Case Dimensions (D x W x H in)	Case Weight (lbs)	Cartons/Pallet
21033781	047871337811	10047871337818	4 / case	12.99 x 6.3 x 6.06	3.78	126


*Based on total household installations as of December 2023. ¹Children, elderly adults and pets are more vulnerable to low levels of carbon monoxide and may be affected faster..

Model Specifications

Alarm Indications	Audible Alarm: 85 dB at 10 ft
	CO sensor alarm times: 70 ppm: 60-240 min, 150 ppm: 10-50 min, 400 ppm: 4-15 min.
	Gas sensor calibrated to alarm before 10% of the low explosion limit (LEL).
	Green LED = power
	Amber LED = fault conditions
	Red LED = alarm
Power & Battery	Plug-In + AA Backup Batteries (included)
	120VAC, 60Hz, 30mA, with 2 AA backup batteries
	Replacement Batteries: Energizer E91, Gold Peak 15A or Golden Power GLR6A. NOTE: Do not use Lithium batteries in this unit.
Functional Features	Test/Hush Button (simulates CO/Gas)
	Alarm Auto Reset After Hushing
Compliance & Listings	ETL Listed
	UL 2034, 5th Edition
	UL 1484, 6th Edition (Gas)
	NFPA 72
	NFPA 101 (one- and two-family dwellings)
	NFPA 715
	Federal Housing Authority (FHA)
	Housing and Urban Development (HUD)
Architectural / Engineering	Housing: PVC
	Green / Red / Amber LED Indicators
	Sounder: ≥85 dB
Technical	Model: COPDLG
	Sensor: Electrochemical CO, Metal Oxide for gas
	Temp: 40 °F (4.4 °C) to 100 °F (37.8 °C)
	Humidity: 10 to 95% relative humidity (RH), non-condensing
	Dimensions: 2.90" W x 1.89" D x 5.47" H
	Weight: 0.50 lb.
Warranty	7-Year Limited (excludes batteries)
User Guide Languages	English / Spanish

⚠ WARNING: This product is intended for use in indoor residential locations. It is not designed to measure compliance with Occupational Safety and Health Administration (OSHA) commercial or industrial standards. This device is designed to help protect individuals from acute effects of carbon monoxide exposure. It will not fully safeguard individuals with specific medical conditions. If in doubt, consult a medical practitioner. Individuals with medical problems may consider using warning devices which provide audible and visual signals for carbon monoxide concentrations under 30 ppm.

Product Dimension (in)

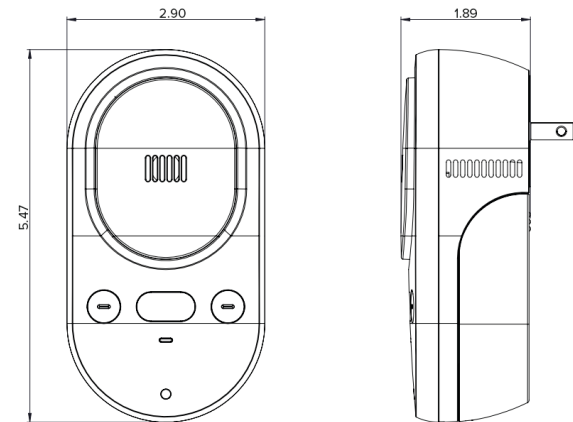

Installation of Alarm²

This model meets the latest carbon monoxide and explosive gas standards. Industry experts recommend a CO alarm be installed on each level of the home — ideally on any level with fuel-burning appliances and outside of sleeping areas. This alarm also includes a removable AC plug and power cord, allowing flexible wall mounting for optimal natural gas detection. See User Guide for more location information and additional instructions. The alarm should be installed to comply with all local codes having jurisdiction in your area.

Alarm Warnings — Featuring multi-color LEDs

- **CO Alarm:** Red LED blinks 4 times every 5 sec in sync with 4 short beeps. On DC power only, after 4 mins, the CO alarm pattern will occur every 60 sec.
- **CO Alarm Memory:** Red LED blinks twice every 15 sec if CO has been detected for up to 7 days.
- **Low Level CO Alert:** Red LED blinks 2 times every 10 sec. in sync with 2 short beeps. On DC power only, after 4 mins, the alert will occur every 60 sec.
- **End of Unit Life:** Amber LED blinks 2 times every 60 sec. in sync with 2 chirps.
- **Low Battery Alert:** Amber LED blinks every 6 sec + single chirp every 60 sec.
- **CO Fault:** Amber LED blinks twice every 60 sec + 3 chirps every 60 sec.
- **Gas Alarm:** Red LED blinks once every 2 sec in sync with 1 beep every 2 sec. On DC power only, after 4 mins, the CO alarm pattern will occur every 60 sec.
- **Gas Alarm Memory:** Red LED blinks twice every 15 sec.

² For technical information only. Not for installation use. See User Guide for installation and safety information.

THE RIGHT SUPPORT, RIGHT WHEN YOU NEED IT.

Get the answers you're looking for, with a dedicated customer service line for pros. Call **Kidde Pro Support** at **1-888-422-6402**.