



Underscore® | K-1821

66" x 32" drop-in bath

Features

- Integral lumbar support
- Slotted overflow allows for deep soaking



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-------------|
| 0 | White |
| 96 | Biscuit |
| 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 15:18 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
CSA C22.2 No. 218.2
UL Listed

Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Drain Location:	Reversible
Drain Hole Diameter:	2-1/4" (57 mm)
Minimum Flat for Door:	2-7/16" (61 mm)
Basin Area, Bottom:	44-1/2" x 22-5/16" (1130 mm x 567 mm)
Basin Area, Top:	59-5/8" x 25-1/2" (1514 mm x 648 mm)
Water Depth:	18" (457 mm)
Water Capacity:	85.8 gal (324.8 L)
Minimum Floor Load:	50 lbs/ft ²
Weight:	86 lbs (39 kg)
Cutout:	Drop-in, 64-1/2" x 30-1/2" (1638 mm x 775 mm)

Material


- Acrylic

Recommended Products/Accessories




K-1491 Bath/whirlpool pillow, removable
K-1601 Bath/whirlpool footstop, removable
K-1177 Tiling-in bead, 144" length
K-550 Undermount kit for select 66" Underscore bath models
K-23726 Drain treatment
K-23732 Tub & shower cleaner
K-31795 Slotted overflow bath drain kit for above-the-floor installations
K-31797 Slotted overflow bath drain kit



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
3-27-2026 15:18 - US-CA

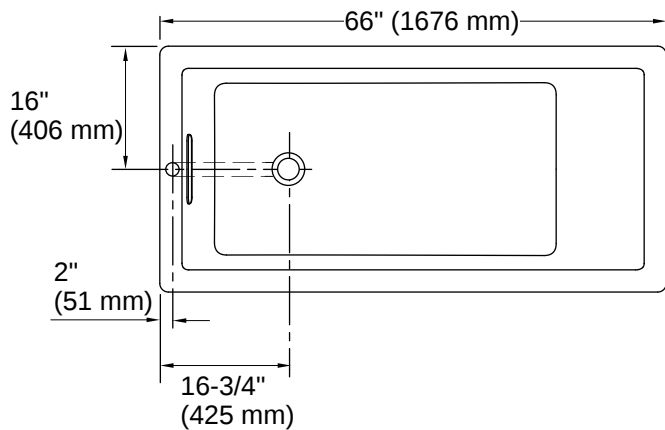

No change in measurement if connected with drain illustrated. (K-7272)

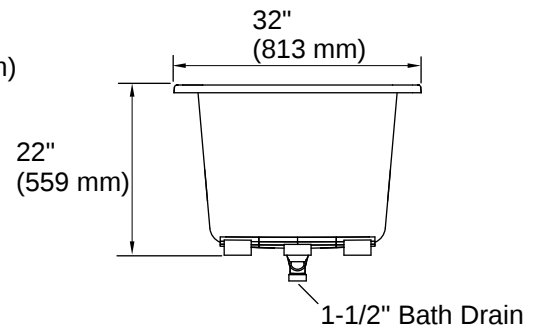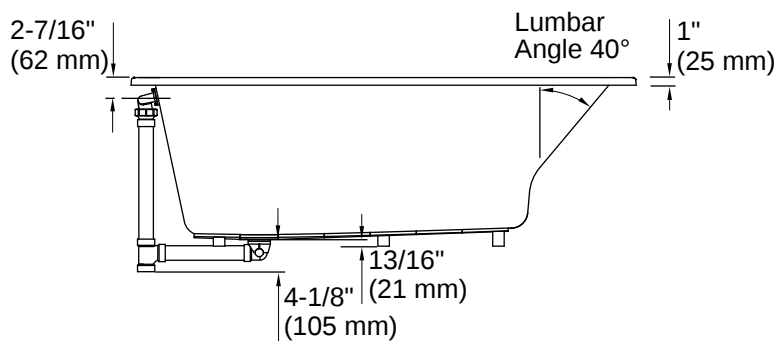

Installation

- Requires Clearflo slotted overflow bath drain (sold separately)
- Drop-in or undermount

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

