








PTAC ACCESSORIES






SPECIFICATION BOOK








TABLE OF CONTENTS

Page No.	Part Number	Description
PTAC WALL SLEEVES & ACESSORIES		
3	AYFDSV01A	Wall Sleeve, Steel SnapEase, Insulated, 42x16x13.75 - Soft Dove
4	AYSVB01A	Wall Sleeve, Steel Assembled, Insulated, 42x16x13.75 - Soft Dove
5	AYFPSV02A	Wall Sleeve, Polymer SnapEase, Insulated, 42x16x14 - Soft Dove
6	AYSV018B	Wall Sleeve 18-in Steel SnapEase, 42x16x18 -Soft Dove
7	AYSV024B	Wall Sleeve 24-in Steel SnapEase, 42x16x24 -Soft Dove
8	AYSVKITB	Wall Sleeve 2-in Steel SnapEase, 42 x 16 x 2 -Soft Dove
PTAC REAR GRILLES		
9	AYRGALA01	Grille, Stamped Aluminum, 42 x 16
10	AYAGALA01A	Grille, Aluminum Architectural, 42 x 16 -Clear
11	AYAGALB01A	Grille, Aluminum Architectural, 42 x 16 -Dark Bronze
12	AYAGALC01A	Grille, Aluminum Architectural, 42 x 16 -Soft Dove
13	AYAGPLB01	Grille, Polymer Architectural, 42 x 16 -Dark Bronze
14	AYAGPLC01	Grille, Polymer Architectural, 42 x 16 -Soft Dove
15	AYAGPLD01	Grille, Polymer Architectural, 42 x 16 -White
CONDENSATE DRAIN KIT		
16	AYDR101B	Drain Kit, Includes Parts for Straight, 90-deg and Internal Drains
PTAC SUBBASES AND COMPONENTS		
17	AYSB1201B	Subbase, 208/230V 20A
18	AYSB1301B	Subbase, 208/230V 30A
19	AYSB2201B	Subbase, 265V 20A
20	AYSB220DS	Subbase, 265V 20A with Disconnect Switch
21	AYSB6101	Subbase, Non-Electrical Subbase
22	AYDSW120B	Subbase Switch Kit, DPST Disconnect Switch - 208/230V 20A
23	AYDSW130B	Subbase Switch Kit, DPST Disconnect Switch - 208/230V 30A
24	AYDSW220B	Subbase Switch Kit, DPST Disconnect Switch - 265V 20A
25	AYLL101B	Leveling Legs, adjustable to support and level unit, 2 per pack
LATERAL DUCT		
26	AYLD1A	Lateral Duct, Includes Plenum and 4-ft Extension Duct - Soft Dove

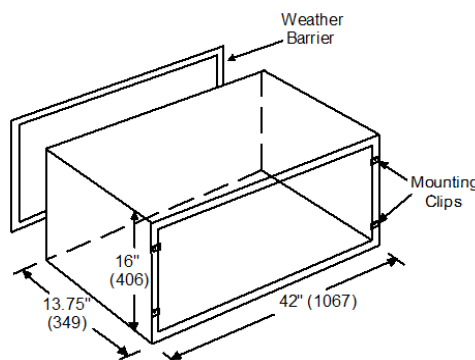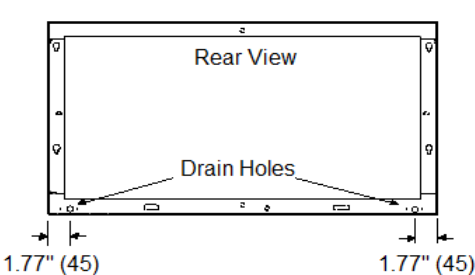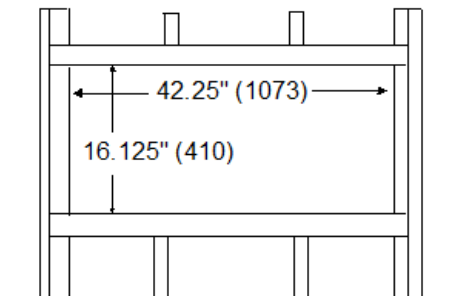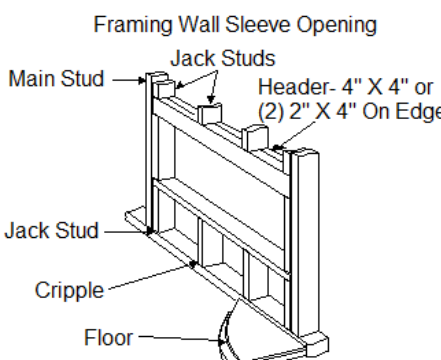Submittal Data: AYFDSV01A		PTAC Standard Metal Wall Sleeve																			
Job Name	Location	Date																			
Purchaser	Engineer																				
Submitted To	For	☐ Reference	☐ Approval ☐ Construction																		
Schedule No.																					
GENERAL FEATURES - Standard 42 x 16 x 13.75-in wall sleeve. - Lined with acoustical & thermal insulation. - Made of heavy duty Galvalume steel. - Powder coated paint for superior adhesion & protection. - Exterior weather barrier included for construction phase. - Key hole slots for easy rear grille mounting. - Rear drainage holes on right and left sides.																					
Specifications Material: Galvalume (Aluminum-Zinc alloy coated steel) Material Thickness*: 0.0433 to 0.0480-in Insulation: Dual-density Fiber Glass Insulation Thickness: 0.25-in Color: Soft Dove Finish: Lightly Textured Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute * including paint.		Unit Dimensions <table border="1"> <tr> <td>Length</td> <td>42.0-in</td> </tr> <tr> <td>Height</td> <td>16.0-in</td> </tr> <tr> <td>Depth</td> <td>13.75-in</td> </tr> <tr> <td>Weight</td> <td>28.0-lbs</td> </tr> </table> Shipping Dimensions <table border="1"> <tr> <td>Length</td> <td>45.5-in</td> </tr> <tr> <td>Height</td> <td>3.0-in</td> </tr> <tr> <td>Depth</td> <td>15.0-in</td> </tr> <tr> <td>Weight</td> <td>28.5-lbs</td> </tr> <tr> <td>Pallet Qty</td> <td>42 pcs</td> </tr> </table>		Length	42.0-in	Height	16.0-in	Depth	13.75-in	Weight	28.0-lbs	Length	45.5-in	Height	3.0-in	Depth	15.0-in	Weight	28.5-lbs	Pallet Qty	42 pcs
Length	42.0-in																				
Height	16.0-in																				
Depth	13.75-in																				
Weight	28.0-lbs																				
Length	45.5-in																				
Height	3.0-in																				
Depth	15.0-in																				
Weight	28.5-lbs																				
Pallet Qty	42 pcs																				
 Typical PTAC Installation  Drain Hole Locations  Minimum Wall Sleeve Opening  Units: Inch(mm) Framing Wall Sleeve Opening 																					
Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.																					

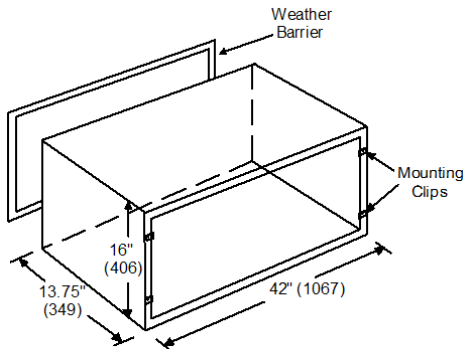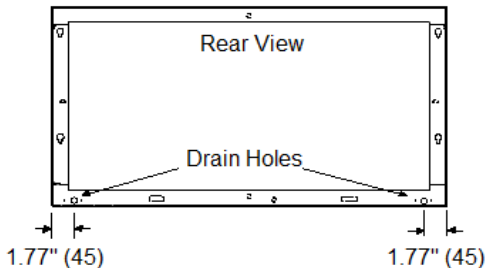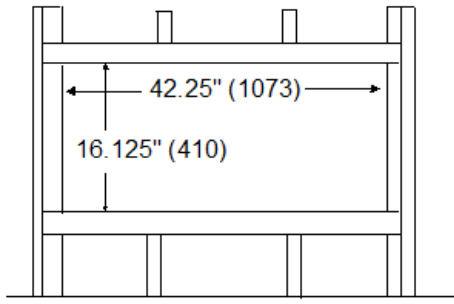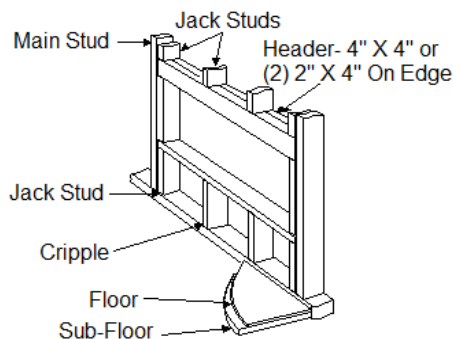Submission Data: AYSVB01A		PTAC Standard Metal Wall Sleeve																			
Job Name	Location	Date																			
Purchaser	Engineer																				
Submitted To	For	☐ Reference	☐ Approval ☐ Construction																		
Schedule No.																					
GENERAL FEATURES - Standard 42 x 16 x 13.75-in wall sleeve. - Lined with acoustical & thermal insulation. - Made of heavy duty Galvalume steel. - Powder coated paint for superior adhesion & protection. - Exterior weather barrier included for construction phase. - Key hole slots for easy rear grille mounting. - Rear drainage holes on right and left sides.																					
Specifications Material: Galvalume (Aluminum-Zinc alloy coated steel) Material Thickness*: 0.0433 to 0.0480-in Insulation: Dual-density Fiber Glass Insulation Thickness: 0.25-in Color: Soft Dove Finish: Lightly Textured Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute * * including paint.		Unit Dimensions <table border="1"> <tr> <td>Length</td> <td>42.0-in</td> </tr> <tr> <td>Height</td> <td>16.0-in</td> </tr> <tr> <td>Depth</td> <td>13.75-in</td> </tr> <tr> <td>Weight</td> <td>28.0-lbs</td> </tr> </table> Shipping Dimensions <table border="1"> <tr> <td>Length</td> <td>43.5-in</td> </tr> <tr> <td>Height</td> <td>16.75-in</td> </tr> <tr> <td>Depth</td> <td>14.5-in</td> </tr> <tr> <td>Weight</td> <td>28.5-lbs</td> </tr> <tr> <td>Pallet Qty</td> <td>9 pcs</td> </tr> </table>		Length	42.0-in	Height	16.0-in	Depth	13.75-in	Weight	28.0-lbs	Length	43.5-in	Height	16.75-in	Depth	14.5-in	Weight	28.5-lbs	Pallet Qty	9 pcs
Length	42.0-in																				
Height	16.0-in																				
Depth	13.75-in																				
Weight	28.0-lbs																				
Length	43.5-in																				
Height	16.75-in																				
Depth	14.5-in																				
Weight	28.5-lbs																				
Pallet Qty	9 pcs																				
 Typical PTAC Installation  Drain Hole Locations  Minimum Wall Sleeve Opening  Units: Inch(mm) Framing Wall Sleeve Opening 																					
Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.																					

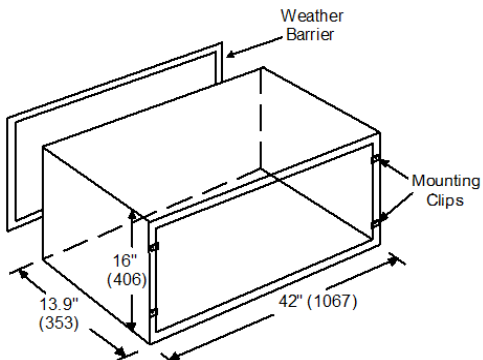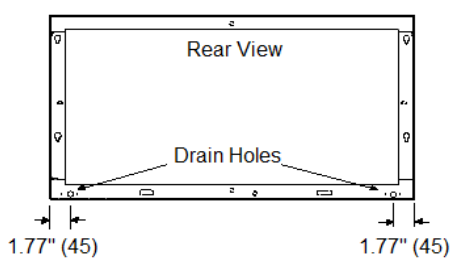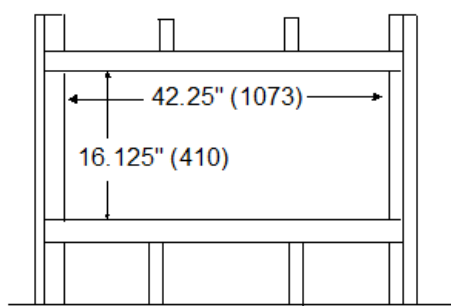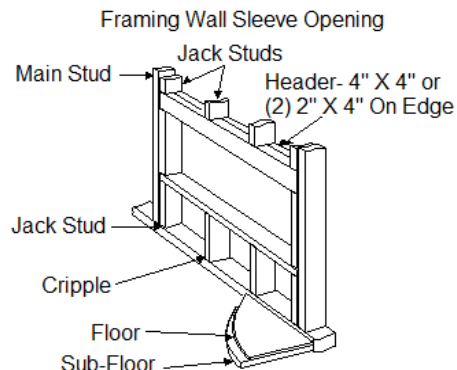Submittal Data: AYFPSV02A		PTAC Standard Polymer Wall Sleeve											
Job Name	Location	Date											
Purchaser	Engineer												
Submitted To	For	☐ Reference	☐ Approval ☐ Construction										
Schedule No.													
GENERAL FEATURES - Standard 42 x 16 x 13.9-in wall sleeve. - Noncorrosive fiberglass-reinforced polyester compound. - Stainless steel latches. - Lined with acoustical & thermal insulation. - Exterior weather barrier included for construction phase. - Key hole slots for easy rear grille mounting. - Rear drainage holes on right and left sides.													
Specifications Material: Sheet Molding Compound (SMC) w/Fiberglass Reinforcement Fire Rating: UL-5V Insulation: Dual-density Fiber Glass Insulation Thickness: 0.25-in Color: Soft Dove Finish: Lightly Textured Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute		Unit Dimensions <table> <tr><td>Length</td><td>42.0-in</td></tr> <tr><td>Height</td><td>16.0-in</td></tr> <tr><td>Depth</td><td>13.9-in</td></tr> <tr><td>Weight</td><td>24.0-lbs</td></tr> </table>		Length	42.0-in	Height	16.0-in	Depth	13.9-in	Weight	24.0-lbs		
Length	42.0-in												
Height	16.0-in												
Depth	13.9-in												
Weight	24.0-lbs												
		Shipping Dimensions <table> <tr><td>Length</td><td>45.5-in</td></tr> <tr><td>Height</td><td>3.25-in</td></tr> <tr><td>Depth</td><td>15.5-in</td></tr> <tr><td>Weight</td><td>24.5-lbs</td></tr> <tr><td>Pallet Qty</td><td>42 pcs</td></tr> </table>		Length	45.5-in	Height	3.25-in	Depth	15.5-in	Weight	24.5-lbs	Pallet Qty	42 pcs
Length	45.5-in												
Height	3.25-in												
Depth	15.5-in												
Weight	24.5-lbs												
Pallet Qty	42 pcs												
 Typical PTAC Installation  Drain Hole Locations  Units: Inch(mm) Minimum Wall Sleeve Opening  Framing Wall Sleeve Opening 													
Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.													

Submission Data: AYSV018B

PTAC 18-inch Extended Metal Wall Sleeve

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For ☐ Reference ☐ Approval ☐ Construction	
Schedule No.		

GENERAL FEATURES

- Extended 42 x 16 x 18-in wall sleeve.
- Lined with acoustical & thermal insulation.
- Made of heavy duty Galvalume steel.
- Powder coated paint for superior adhesion & protection.
- Exterior weather barrier included for construction phase.
- Key hole slots for easy rear grille mounting.
- Rear drainage holes on right and left sides.



Specifications

Material: Galvalume (Aluminum-Zinc alloy coated steel)
Material Thickness*: 0.0433 to 0.0480-in
Insulation: Dual-density Fiber Glass
Insulation Thickness: 0.25-in
Color: Soft Dove
Finish: Lightly Textured
Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute


* including paint.

Unit Dimensions


Length	42.0-in
Height	16.0-in
Depth	18.0-in
Weight	44.0-lbs

Shipping Dimensions

Length	46.5-in
Height	3.25-in
Depth	19.0-in
Weight	44.5-lbs
Pallet Qty	28 pcs

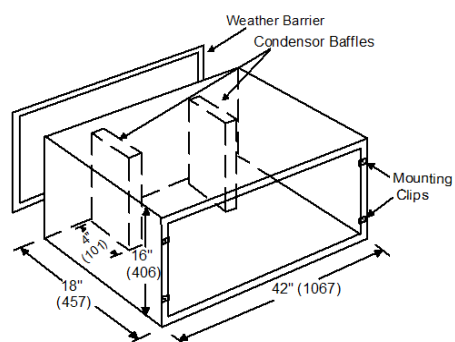


Drain Hole Locations

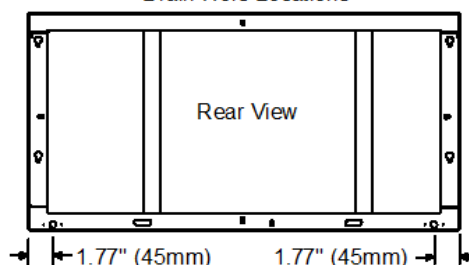


Units: Inch(mm)


Typical PTAC Installation

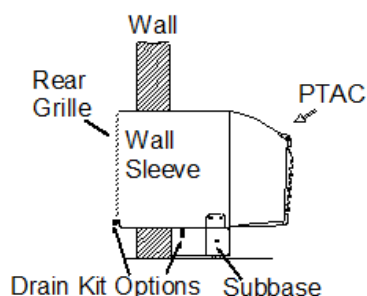

Minimum Wall Sleeve Opening

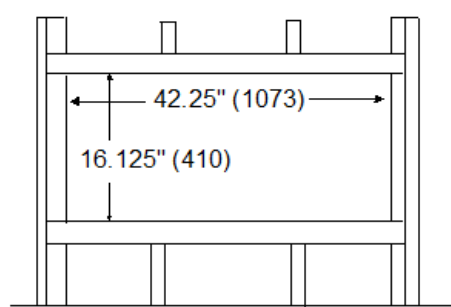

Framing Wall Sleeve Opening

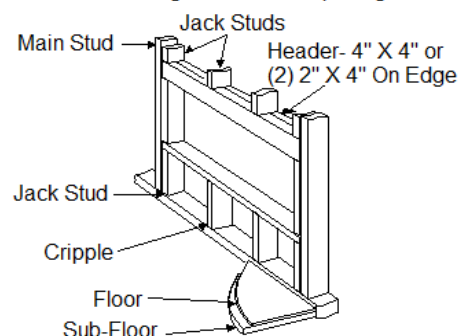

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submission Data: AYSV024B

PTAC 24-inch Extended Metal Wall Sleeve

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	☐ Reference ☐ Approval ☐ Construction
Schedule No.		

GENERAL FEATURES

- Extended 42 x 16 x 24-in wall sleeve.
- Lined with acoustical & thermal insulation.
- Made of heavy duty Galvalume steel.
- Powder coated paint for superior adhesion & protection.
- Exterior weather barrier included for construction phase.
- Key hole slots for easy rear grille mounting.
- Rear drainage holes on right and left sides.



Specifications

Material: Galvalume (Aluminum-Zinc alloy coated steel)
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Soft Dove
 Finish: Lightly Textured
 Weather Barrier: Corrugated Fiberboard 275# TBST S.W. "B" Flute

* * including paint.


Unit Dimensions

Length	42.0-in
Height	16.0-in
Depth	24.0-in
Weight	59.0-lbs


Shipping Dimensions

Length	45.25-in
Height	4.0-in
Depth	25.75-in
Weight	59.5-lbs
Pallet Qty	24 pcs


Units: Inch(mm)

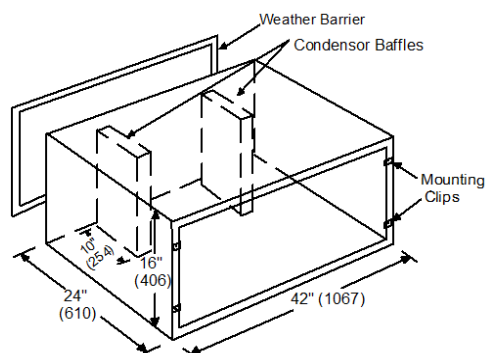


Typical PTAC Installation

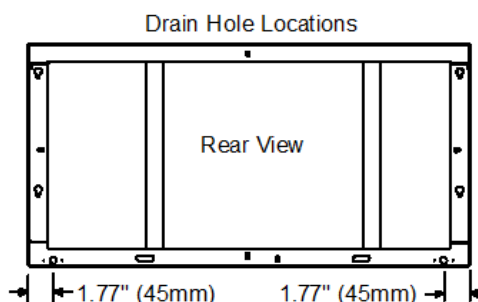

Drain Hole Locations

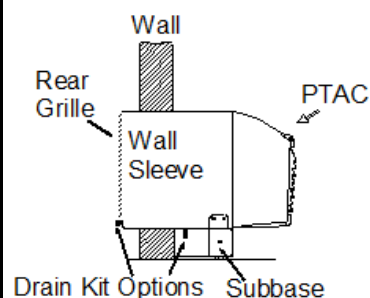

Minimum Wall Sleeve Opening

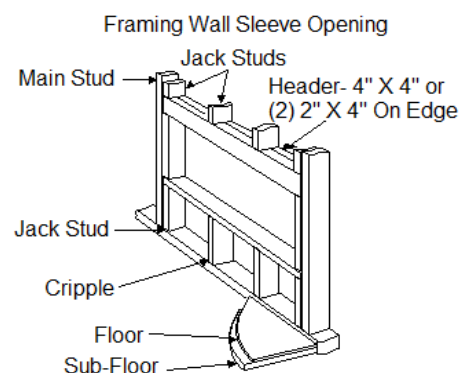

Framing Wall Sleeve Opening


Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYSVKITB
2-inch Wall Sleeve Extender

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For ☐ Reference ☐ Approval ☐ Construction	
Schedule No.		

GENERAL FEATURES

- 42 x 16 x 2-in wall sleeve extender.
- Fits on front side of standard wall sleeve.
- Lined with acoustical & thermal insulation.
- Made of heavy duty Galvalume steel.
- Powder coated paint for superior adhesion & protection.
- Includes (2) condenser air baffle/gasket extenders.
- Includes (4) mounting screws for wall sleeve attachment.

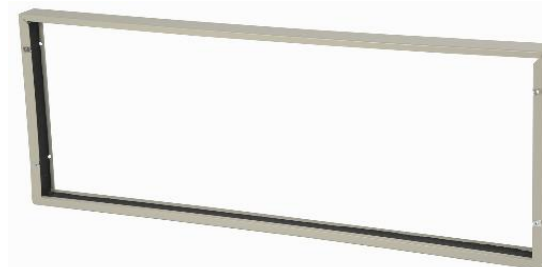
Specifications

Material: Galvalume (Aluminum-Zinc alloy coated steel)
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Soft Dove
 Finish: Lightly Textured
 Condenser Baffles/Gaskets: 12.5 x 2 x 2-in (closed cell foam)\


* including paint.

Unit Dimensions

Length	42.0-in
Height	16.0-in
Depth	2.0-in
Weight	6-lbs


Shipping Dimensions

Length	43.75-in
Height	2.5-in
Depth	16.5-in
Weight	6.5-lbs
Pallet Qty	32 pcs

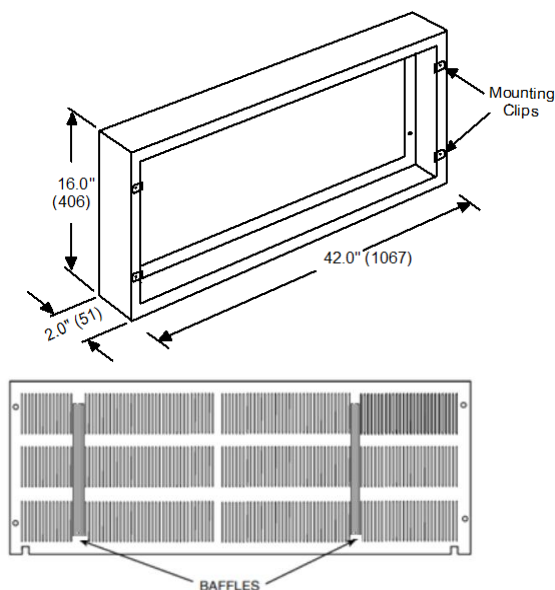


Add condenser baffle/gasket extenders to outdoor grille. (Grille type shown- ref only)

Units: Inch(mm)

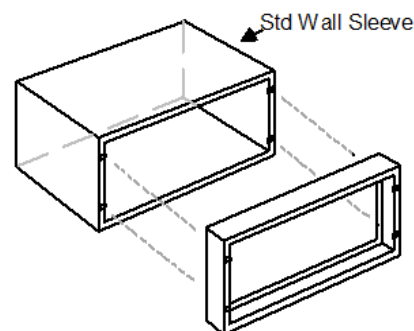

Fastens to indoor side with 4 screws.



Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYRGALA01

Stamped Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	☐ Reference ☐ Approval ☐ Construction
Schedule No.		

GENERAL FEATURES

- Strong and durable aluminum construction.
- Clear anodized aluminum color.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain holes provided.
- Factory installed foam condenser air baffle/gaskets.



Specifications

Material: Aluminum
 Finish: Clear
 Fin Thickness: 1.02 mm
 Condenser Fin Pitch: 73°
 Condenser Free Area: 96 %


Unit Dimensions

Length	41.6-in
Height	15.6-in
Depth	0.5-in
Weight	3-lbs

Shipping Dimensions

Length	42-in
Height	16-in
Depth	1-in
Weight	3.5-lbs
Pallet Qty	86 pcs

Units: Inch(mm)

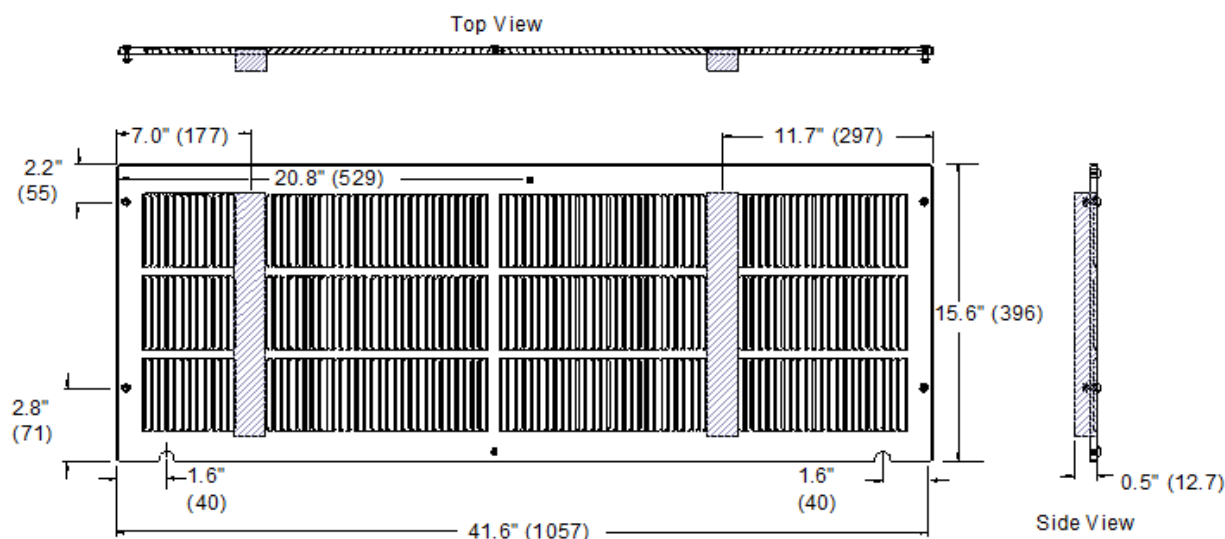

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYAGALA01A Architectural Aluminum Grille


Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	☐ Reference ☐ Approval ☐ Construction
Schedule No.		

GENERAL FEATURES




- Decorative architectural style aluminum grille.
- Clear anodized aluminum color.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain hole knockouts provided.
- Condenser air baffle/gaskets with vertical air deflectors.



Specifications	Unit Dimensions
Material: Extruded aluminum, Alloy 6063-T5	Length 41.9-in
Finish: Clear Anodized	Height 15.8-in
Louver Thickness: 0.04 inch (1.016 mm), nominal	Depth 1.12-in
Louver Pitch: 50°	Weight 7.5-lbs
Condenser Free Area: 65.3 %	
	Shipping Dimensions
	Length 43.5-in
	Height 2-in
	Depth 16-in
	Weight 8-lbs
	Pallet Qty 44 pcs

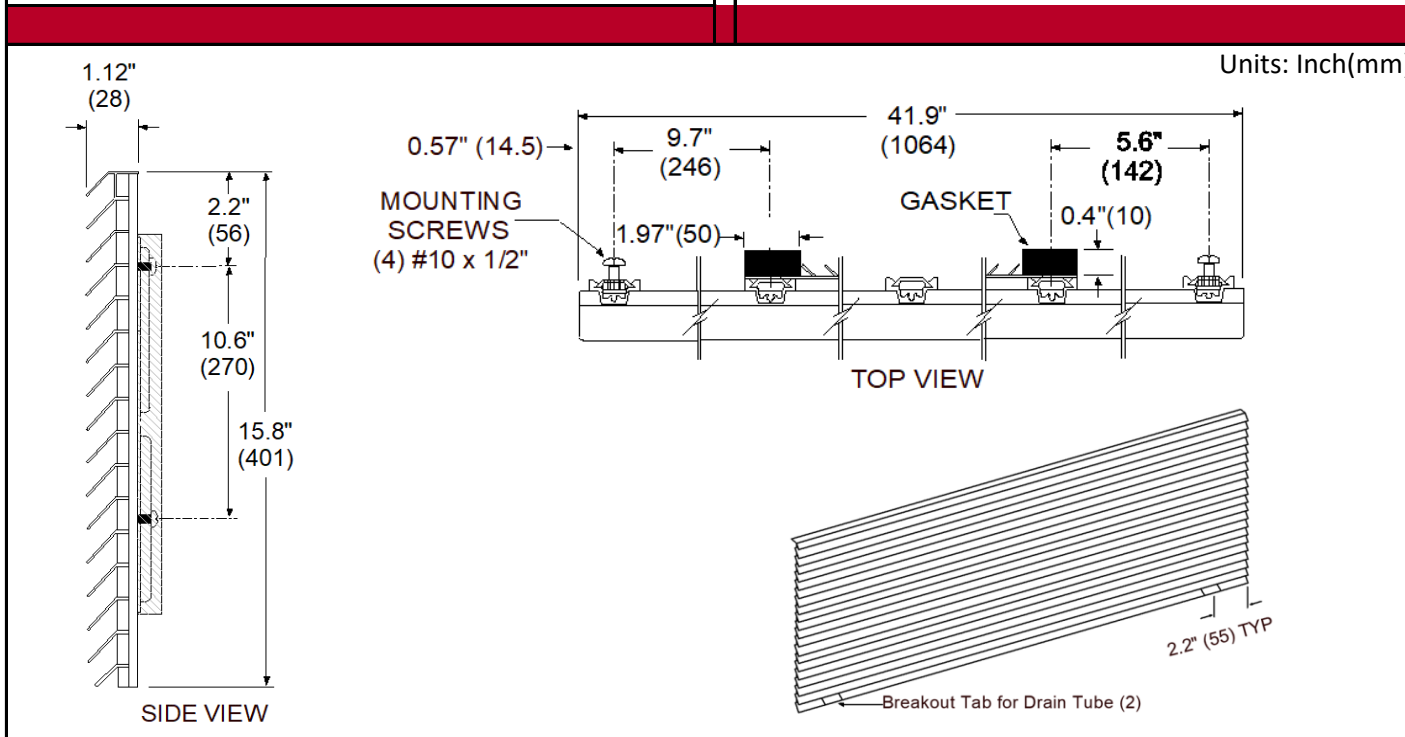

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

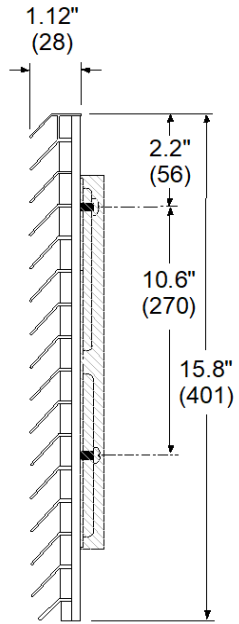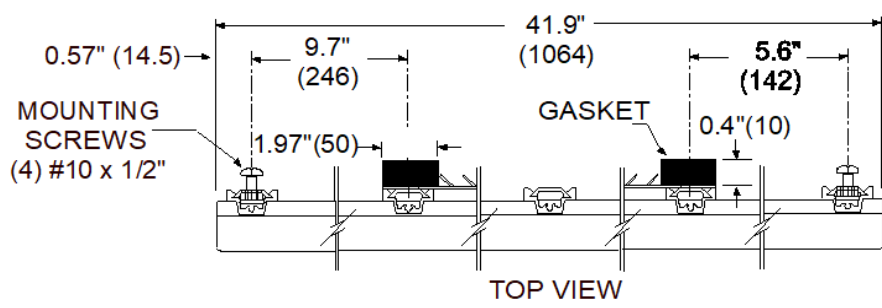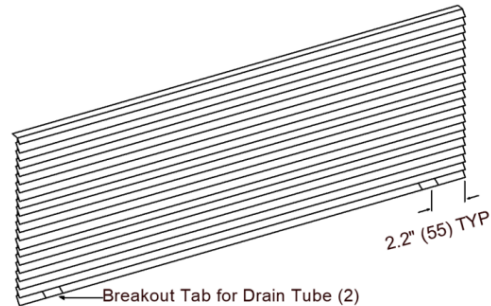Submittal Data: AYAGALB01A		Architectural Aluminum Grille											
Job Name	Location	Date											
Purchaser	Engineer												
Submitted To	For	☐ Reference	☐ Approval ☐ Construction										
Schedule No.													
GENERAL FEATURES - Decorative architectural style aluminum grille. - Powder coat painted for superior adhesion & protection. - 42 in. x 16 in. design. - Designed to be mounted easily from inside the room. - Right & left drain hole knockouts provided. - Condenser air baffle/gaskets with vertical air deflectors.													
Specifications Material: Extruded aluminum, Alloy 6063-T5 Finish: Dark Bronze/Brown Louver Thickness: 0.04 inch (1.016 mm), nominal Louver Pitch: 50° Condenser Free Area: 65.3 %		Unit Dimensions <table> <tr><td>Length</td><td>41.9-in</td></tr> <tr><td>Height</td><td>15.8-in</td></tr> <tr><td>Depth</td><td>1.12-in</td></tr> <tr><td>Weight</td><td>7.5-lbs</td></tr> </table>		Length	41.9-in	Height	15.8-in	Depth	1.12-in	Weight	7.5-lbs		
Length	41.9-in												
Height	15.8-in												
Depth	1.12-in												
Weight	7.5-lbs												
		Shipping Dimensions <table> <tr><td>Length</td><td>43.5-in</td></tr> <tr><td>Height</td><td>2-in</td></tr> <tr><td>Depth</td><td>16-in</td></tr> <tr><td>Weight</td><td>8-lbs</td></tr> <tr><td>Pallet Qty</td><td>44 pcs</td></tr> </table>		Length	43.5-in	Height	2-in	Depth	16-in	Weight	8-lbs	Pallet Qty	44 pcs
Length	43.5-in												
Height	2-in												
Depth	16-in												
Weight	8-lbs												
Pallet Qty	44 pcs												
Units: Inch(mm)  SIDE VIEW  TOP VIEW  Breakout Tab for Drain Tube (2)													
Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.													


Submittal Data: AYAGALC01A

Architectural Aluminum Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	☐ Reference ☐ Approval ☐ Construction
Schedule No.		

GENERAL FEATURES

- Decorative architectural style aluminum grille.
- Powder coat painted for superior adhesion & protection.
- 42 in. x 16 in. design.
- Designed to be mounted easily from inside the room.
- Right & left drain hole knockouts provided.
- Condenser air baffle/gaskets with vertical air deflectors.

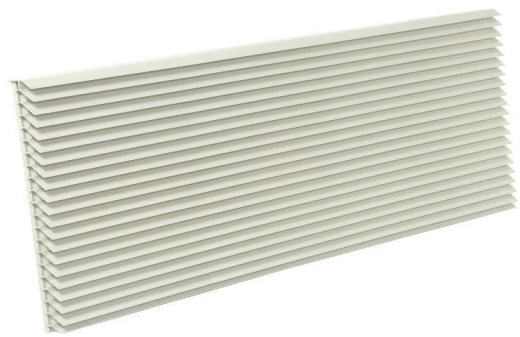

Specifications




Material: Extruded aluminum, Alloy 6063-T5
 Finish: Soft Dove Beige
 Louver Thickness: 0.04 inch (1.016 mm), nominal
 Louver Pitch: 50°
 Condenser Free Area: 65.3 %

Unit Dimensions

Length	41.9-in
Height	15.8-in
Depth	1.12-in
Weight	7.5-lbs

Shipping Dimensions

Length	43.5-in
Height	2-in
Depth	16-in
Weight	8-lbs
Pallet Qty	44 pcs

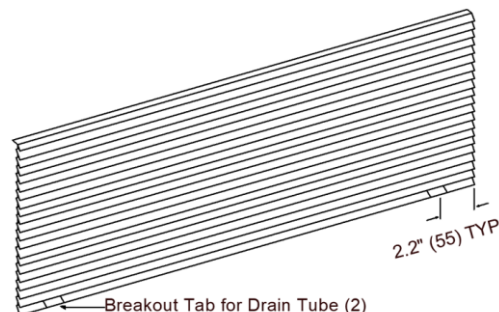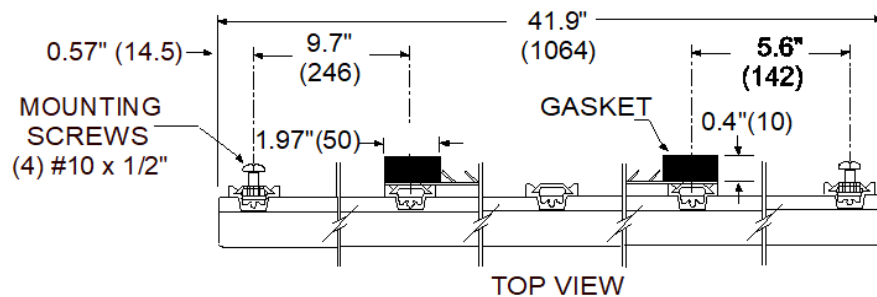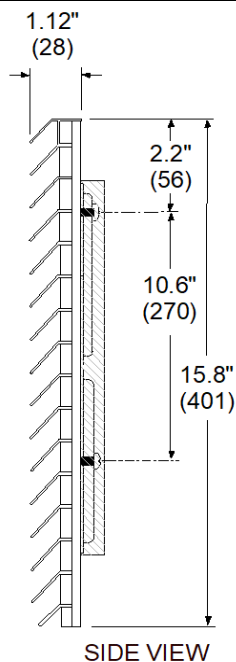

Units: Inch(mm)

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYAGPLB01

Architectural Polymer Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For ☐ Reference ☐ Approval ☐ Construction	
Schedule No.		

GENERAL FEATURES

- Decorative 1-piece molded grille.
- Colorfast, lightly textured finish.
- 42 in. x 16 in. design.
- Meets UL flammability rating of UL94-2V.
- Right & left drain slots provided.
- Condenser air baffle/gaskets with vertical air deflectors.
- Contains UV protector.



Specifications

Material: Injection Molding Polycarbonate
 Finish: Dark Bronze
 Louver Thickness: 0.125-in
 Wall & Rib Thickness: 0.070-in
 Louver Pitch: 49°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	42.0-in
Height	15.9-in
Depth	1.16-in
Weight	7.0-lbs

Shipping Dimensions

Length	43.5-in
Height	2.0-in
Depth	16.5-in
Weight	7.5-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

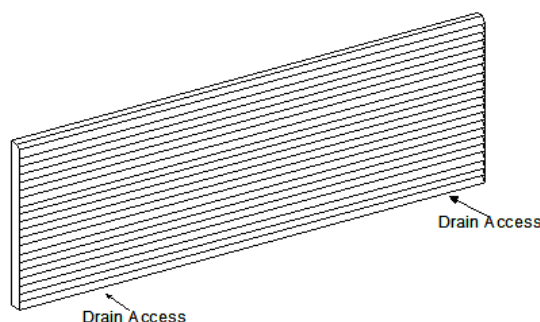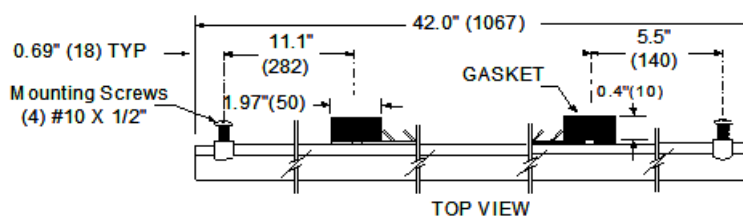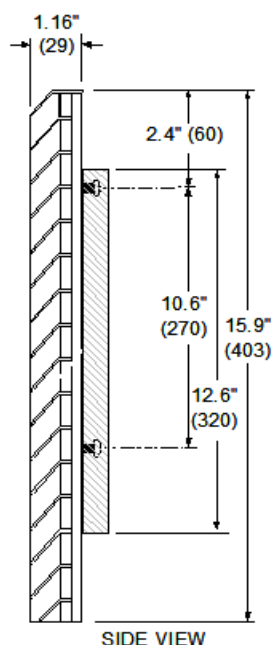

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.


Submittal Data: AYAGPLC01

Architectural Polymer Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For ☐ Reference ☐ Approval ☐ Construction	
Schedule No.		

GENERAL FEATURES

- Decorative 1-piece molded grille.
- Colorfast, lightly textured finish.
- 42 in. x 16 in. design.
- Meets UL flammability rating of UL94-2V.
- Right & left drain slots provided.
- Condenser air baffle/gaskets with vertical air deflectors.
- Contains UV protector.

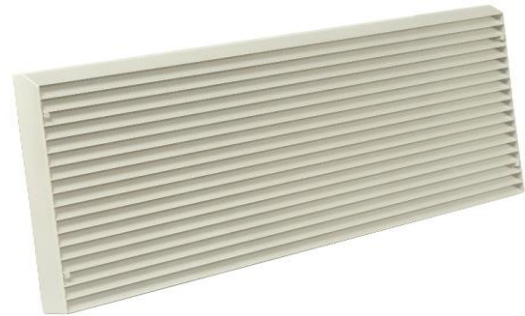

Specifications

Material: Injection Molding Polycarbonate
 Finish: Soft Dove Beige
 Louver Thickness: 0.125-in
 Wall & Rib Thickness: 0.070-in
 Louver Pitch: 49°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	42.0-in
Height	15.9-in
Depth	1.16-in
Weight	7.0-lbs

Shipping Dimensions

Length	43.5-in
Height	2.0-in
Depth	16.5-in
Weight	7.5-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

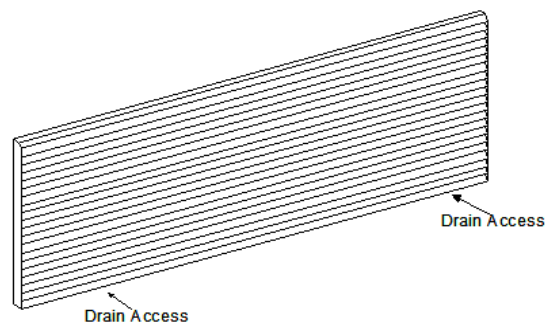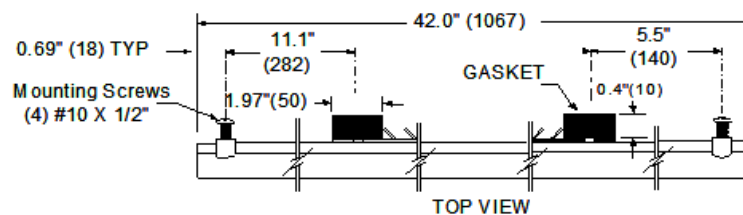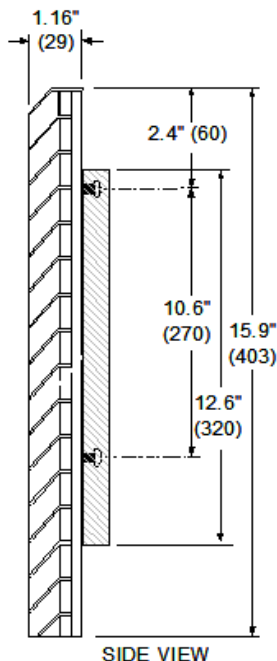

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYAGPLD01

Architectural Polymer Grille

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For ☐ Reference ☐ Approval ☐ Construction	
Schedule No.		

GENERAL FEATURES

- Decorative 1-piece molded grille.
- Colorfast, lightly textured finish.
- 42 in. x 16 in. design.
- Meets UL flammability rating of UL94-2V.
- Right & left drain slots provided.
- Condenser air baffle/gaskets with vertical air deflectors.
- Contains UV protector.



Specifications

Material: Injection Molding Polycarbonate
 Finish: White
 Louver Thickness: 0.125-in
 Wall & Rib Thickness: 0.070-in
 Louver Pitch: 49°
 Condenser Free Area: 65.3 %




Unit Dimensions

Length	42.0-in
Height	15.9-in
Depth	1.6-in
Weight	7.0-lbs





Shipping Dimensions





Length	43.5-in
Height	2.0-in
Depth	16.5-in
Weight	7.5-lbs
Pallet Qty	44 pcs

Units: Inch(mm)

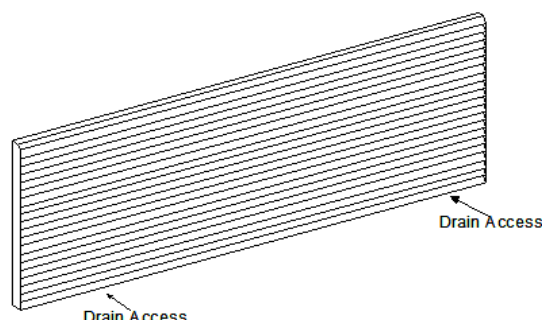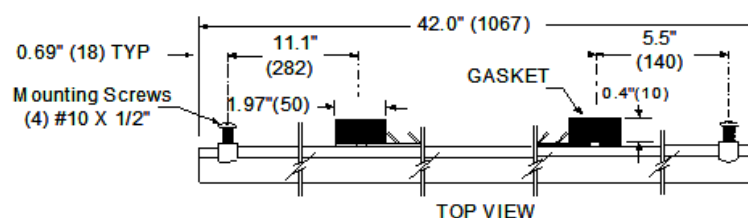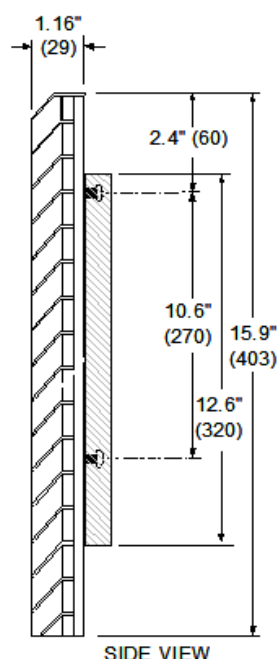

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

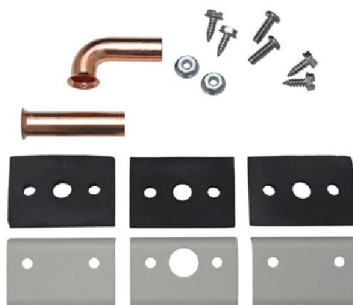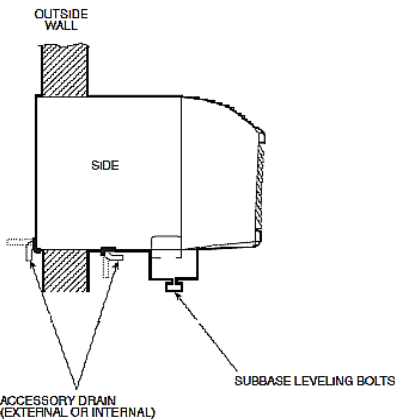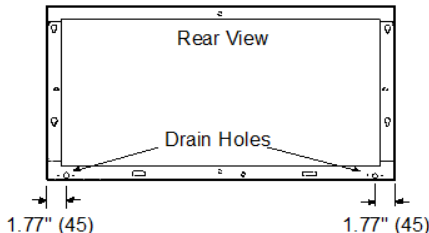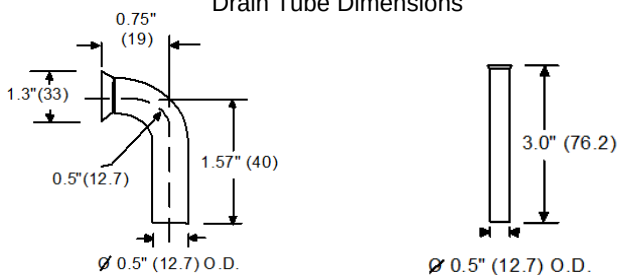Submission Data: AYDR101B		PTAC Condensate Drain	
Job Name		Location	
Purchaser		Date	
Submitted To		Engineer	
		☐ Reference ☐ Approval ☐ Construction	
		Schedule No.	
GENERAL FEATURES - Easily mounts to rear flange for an exterior drain system. - Includes a 3-inch straight and short 90-degree drain copper tube. - Mounts easily and securely to standard wall sleeve. - Configurable for internal wall drain system. - Corrosive resistant stainless steel screws.			
Shipping Dimensions			
Length	6.0-in		
Height	0.5-in		
Depth	6.0-in		
Weight	0.25-lbs		
Pallet Qty	2920 pcs		
		Drain Hole Locations 	
Kit Includes : - (1) 90 deg Copper Drain Tube - (1) 3" Straight Copper Drain Tube - (2) Solid Drain Brackets incl. Foam to Seal Drain Holes - (1) Drain Bracket with Hole for Drain Tube incl Foam Seal - Stainless Steel Screws		Drain Tube Dimensions 	
Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.			

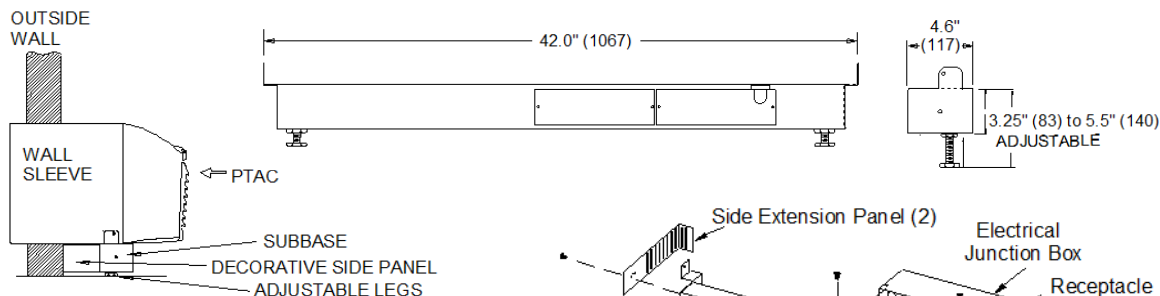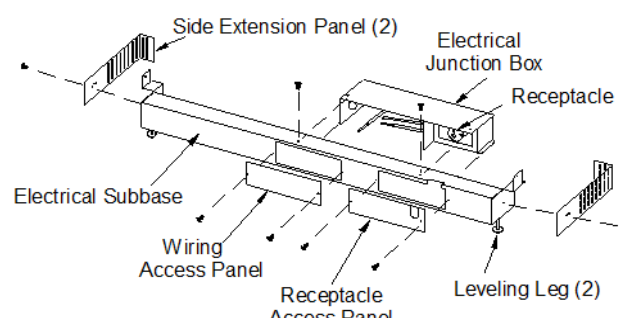Submittal Data: AYSB1201B		PTAC 208/230v 20A Electrical Subbase											
Job Name	Location	Date											
Purchaser	Engineer												
Submitted To	For ☐ Reference ☐ Approval ☐ Construction												
Schedule No.													
GENERAL FEATURES - Contains a prewired NEMA receptacle outlet. - Multiple electrical knockouts for fast and easy installation. - Conceals excess unit power cord for a neat, finished appearance. - Adjustable height of 3¼ to 5½ inches from finished floor. - Made of heavy gauge steel. - Mounts easily and securely to standard wall sleeve. - Decorative side skirting for finished appearance. - Optional field installed pre-wired disconnect switch and fuse kits.													
Specifications		Unit Dimensions											
Physical: Material: Steel Material Thickness*: 0.0433 to 0.0480-in Color: Black Finish: Powder coated paint Electrical: Voltage Rating: 208/230v Current Rating: 20 amp Receptacle Type: NEMA 6-20		<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Length</td> <td style="width: 50%;">42.0-in</td> </tr> <tr> <td>Height</td> <td>3.25-in</td> </tr> <tr> <td>Depth</td> <td>4.625-in</td> </tr> <tr> <td>Weight</td> <td>9.0-lbs</td> </tr> </table>		Length	42.0-in	Height	3.25-in	Depth	4.625-in	Weight	9.0-lbs		
Length	42.0-in												
Height	3.25-in												
Depth	4.625-in												
Weight	9.0-lbs												
		Shipping Dimensions											
		<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Length</td> <td style="width: 50%;">43.75-in</td> </tr> <tr> <td>Height</td> <td>5.0-in</td> </tr> <tr> <td>Depth</td> <td>5.25-in</td> </tr> <tr> <td>Weight</td> <td>9.5-lbs</td> </tr> <tr> <td>Pallet Qty</td> <td>72 pcs</td> </tr> </table>		Length	43.75-in	Height	5.0-in	Depth	5.25-in	Weight	9.5-lbs	Pallet Qty	72 pcs
Length	43.75-in												
Height	5.0-in												
Depth	5.25-in												
Weight	9.5-lbs												
Pallet Qty	72 pcs												
* including paint. 													
 Units: Inch(mm)  NOTES: - Accessory 230V subbase is required for applications where: - Wall sleeve extends 4 or more inches into the room. - Wall thickness is less than 2 inches. - For all applications with an accessory subbase: - Wall sleeve must extend 3 in. minimum into the room. - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor. - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting). 													
Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.													

Submittal Data: AYSB1301B

PTAC 208/230v 30A Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For ☐ Reference ☐ Approval ☐ Construction	
Schedule No.		

GENERAL FEATURES

- Contains a prewired NEMA receptacle outlet.
- Multiple electrical knockouts for fast and easy installation.
- Conceals excess unit power cord for a neat, finished appearance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Made of heavy gauge steel.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Optional field installed pre-wired disconnect switch and fuse kits.



Specifications

Physical:

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black


Finish: Powder coated paint

Electrical:

Voltage Rating: 208/230v

Current Rating: 30 amp

Receptacle Type: NEMA 6-30



* including paint.



Unit Dimensions

Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs


Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

OUTSIDE WALL

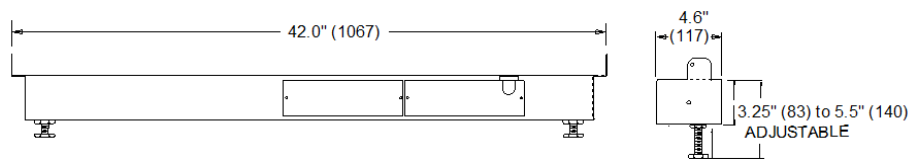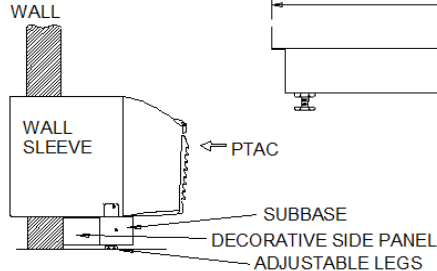


Units: Inch(mm)



NOTES:

- Accessory 230V subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

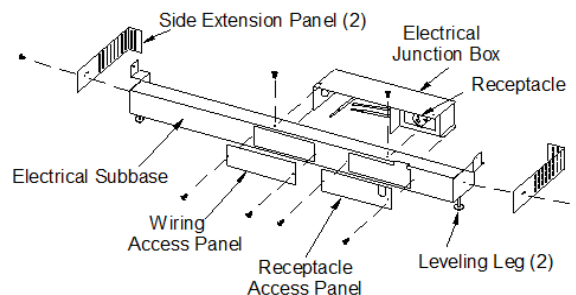

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYSB2201B

PTAC 265v 20A Electrical Subbase

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For ☐ Reference ☐ Approval ☐ Construction	
Schedule No.		

GENERAL FEATURES

- Contains a prewired NEMA receptacle outlet.
- Multiple electrical knockouts for fast and easy installation.
- Conceals unit power cord for a neat, finished appearance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Steel chase-way between unit and subbase to hide power cord.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Optional field installed pre-wired disconnect switch and fuse kits.



Specifications

Physical:

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

Electrical:

Voltage Rating: 265v

Current Rating: 20 amp

Receptacle Type: NEMA 7-20



* including paint.




Unit Dimensions

Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs


Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

OUTSIDE WALL

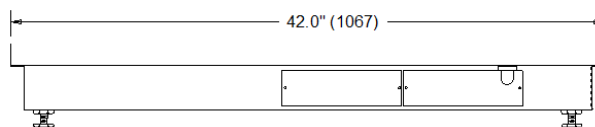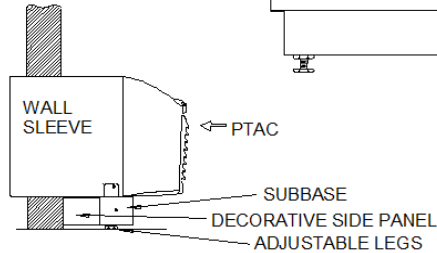


Units: Inch(mm)



Field Wiring
Line Voltage

NOTES:

- Accessory 265-v subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
 - All 265-v cord-connected applications.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

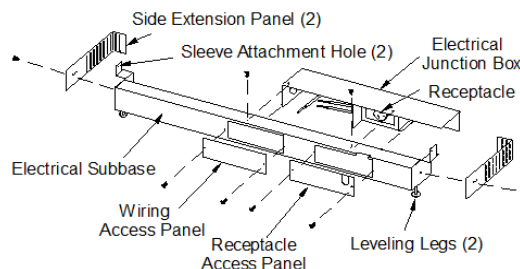

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYSB220DS

PTAC 265v 20A Electrical Subbase w/ Disconnect Switch

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For ☐ Reference ☐ Approval ☐ Construction	
Schedule No.		

GENERAL FEATURES

- Contains a prewired NEMA receptacle outlet and disconnect switch.
- Multiple electrical knockouts for fast and easy installation.
- Conceals unit power cord for a neat, finished appearance.
- Adjustable height of 3¼ to 5½ inches from finished floor.
- Steel chase-way between unit and subbase to hide power cord.
- Mounts easily and securely to standard wall sleeve.
- Decorative side skirting for finished appearance.
- Optional field installed fuse kit.



Specifications

Physical:

Material: Steel

Material Thickness*: 0.0433 to 0.0480-in

Color: Black

Finish: Powder coated paint

Electrical:

Voltage Rating: 265v

Current Rating: 20 amp

Receptacle Type: NEMA 7-20



* including paint.




Unit Dimensions

Length	42.0-in
Height	3.25-in
Depth	4.625-in
Weight	9.0-lbs


Shipping Dimensions

Length	43.75-in
Height	5.0-in
Depth	5.25-in
Weight	9.5-lbs
Pallet Qty	72 pcs

OUTSIDE WALL

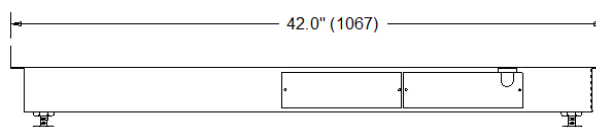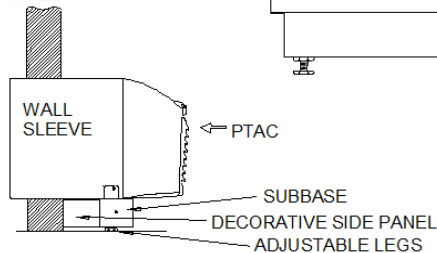


Units: Inch(mm)




NOTES:

- Accessory 265-v subbase is required for applications where:
 - Wall sleeve extends 4 or more inches into the room.
 - Wall thickness is less than 2 inches.
 - All 265-v cord-connected applications.
- For all applications with an accessory subbase:
 - Wall sleeve must extend 3 in. minimum into the room.
 - Wall sleeve must be installed between 3-1/4 in. minimum to 5-1/2 in. max. above the floor.
 - Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).

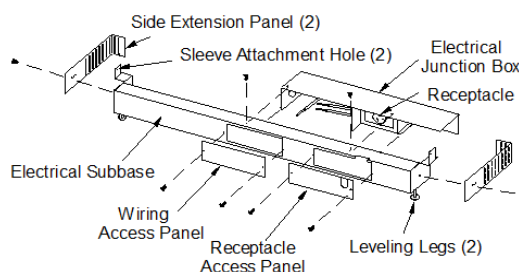

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

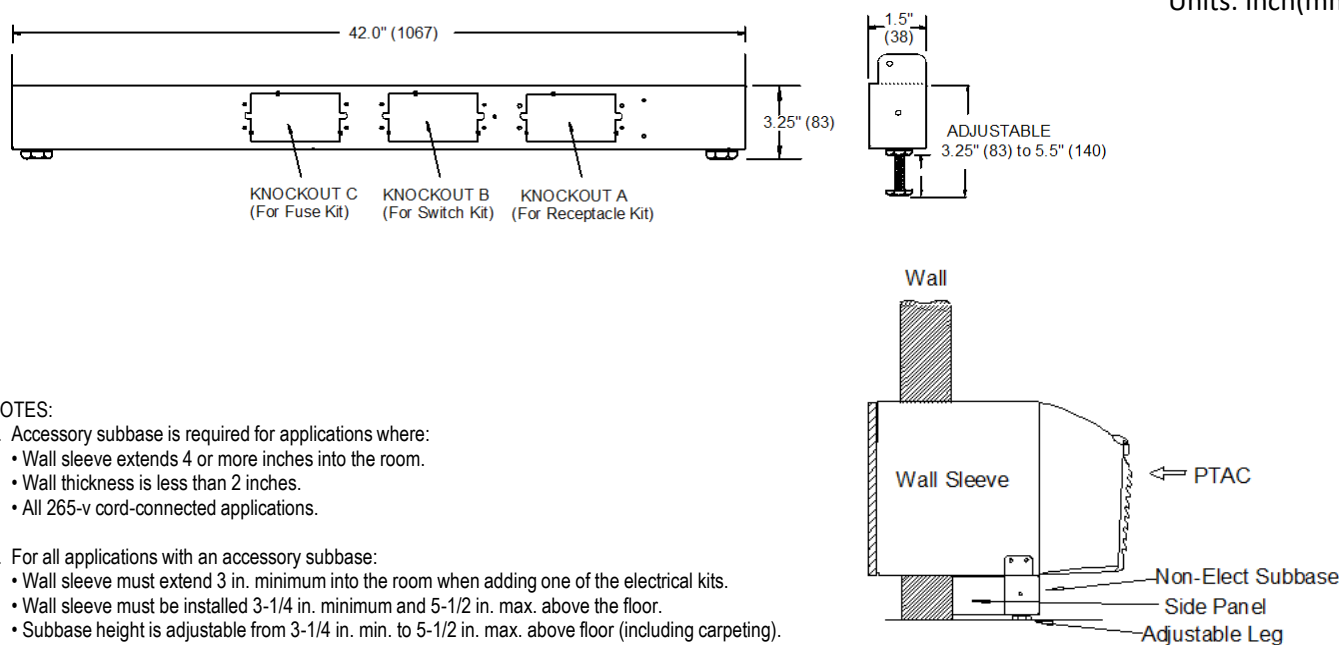Submittal Data: AYSB6101		PTAC Non-Electrical Subbase																			
Job Name	Location	Date																			
Purchaser	Engineer																				
Submitted To	For	☐ Reference	☐ Approval ☐ Construction																		
Schedule No.																					
GENERAL FEATURES - Adjustable height of 3¼ to 5½ inches from finished floor. - Made of heavy gauge steel. - Mounts easily and securely to standard wall sleeve. - Decorative side skirting for finished appearance. - Field installed receptacle, disconnect switch and fuse kits available.																					
Specifications Material: Steel Material Thickness*: 0.0433 to 0.0480-in Color: Black Finish: Powder coated paint * including paint.		Unit Dimensions <table> <tr><td>Length</td><td>42.0-in</td></tr> <tr><td>Height</td><td>3.25-in</td></tr> <tr><td>Depth</td><td>1.5-in</td></tr> <tr><td>Weight</td><td>4.0-lbs</td></tr> </table> Shipping Dimensions <table> <tr><td>Length</td><td>43.0-in</td></tr> <tr><td>Height</td><td>5.5-in</td></tr> <tr><td>Depth</td><td>2.0-in</td></tr> <tr><td>Weight</td><td>4.5-lbs</td></tr> <tr><td>Pallet Qty</td><td>160 pcs</td></tr> </table>		Length	42.0-in	Height	3.25-in	Depth	1.5-in	Weight	4.0-lbs	Length	43.0-in	Height	5.5-in	Depth	2.0-in	Weight	4.5-lbs	Pallet Qty	160 pcs
Length	42.0-in																				
Height	3.25-in																				
Depth	1.5-in																				
Weight	4.0-lbs																				
Length	43.0-in																				
Height	5.5-in																				
Depth	2.0-in																				
Weight	4.5-lbs																				
Pallet Qty	160 pcs																				
NOTES: - Accessory subbase is required for applications where: • Wall sleeve extends 4 or more inches into the room. • Wall thickness is less than 2 inches. • All 265-v cord-connected applications. - For all applications with an accessory subbase: • Wall sleeve must extend 3 in. minimum into the room when adding one of the electrical kits. • Wall sleeve must be installed 3-1/4 in. minimum and 5-1/2 in. max. above the floor. • Subbase height is adjustable from 3-1/4 in. min. to 5-1/2 in. max. above floor (including carpeting).		Units: Inch(mm) 																			
Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.																					

Submittal Data: AYDSW120B

PTAC Subbase Switch 208/230v 20A Accessory

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	☐ Reference ☐ Approval ☐ Construction
Schedule No.		

GENERAL FEATURES

- Provides a physical power disconnect for a PTAC unit.
- Rated for 208/230 & 265 volts up to 30 amps.
- Includes a prewired power DPST switch.
- Mounts quickly and easily in the subbase.
- Cannot be used with Part No. AYSB6101



Specifications

Physical:

Color: Black
Finish: Powder coated paint

Electrical:




Voltage Rating: 208/230/265v
Current Rating: 30 amp
Switch Type: DPST

Unit Dimensions

Length	8.25-in
Height	2.75-in
Depth	2.0-in
Weight	1.0-lbs

Shipping Dimensions

Length	10.0-in
Height	3.5-in
Depth	3.5-in
Weight	1.5-lbs

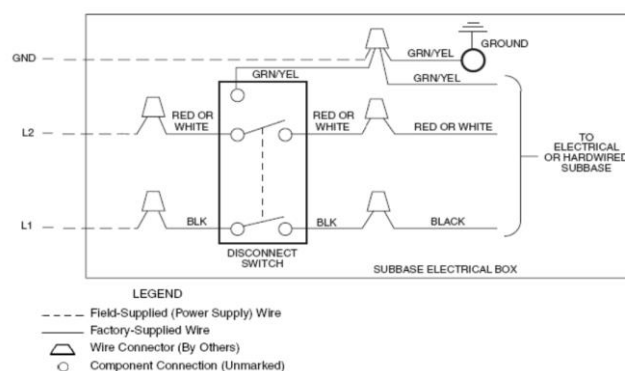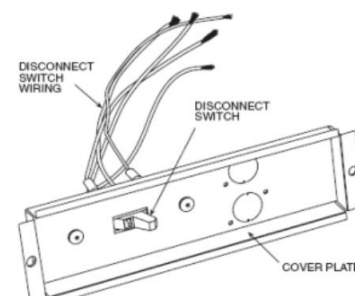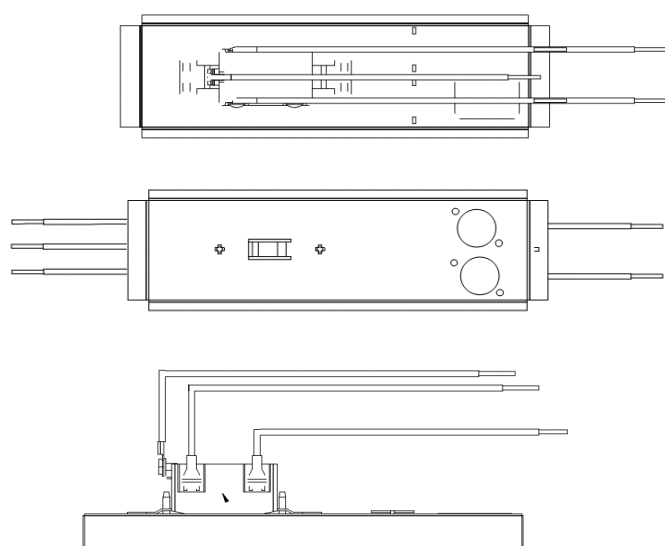

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYDSW130B

PTAC Subbase Switch 208/230v 30A Accessory

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For ☐ Reference ☐ Approval ☐ Construction	
Schedule No.		

GENERAL FEATURES

- Provides a physical power disconnect for a PTAC unit.
- Rated for 208/230 & 265 volts up to 30 amps.
- Includes a prewired power DPST switch.
- Mounts quickly and easily in the subbase.
- Cannot be used with Part No. AYSB6101



Specifications

Physical:

Color: Black
Finish: Powder coated paint

Electrical:




Voltage Rating: 208/230/265v
Current Rating: 30 amp
Switch Type: DPST

Unit Dimensions

Length	8.25-in
Height	2.75-in
Depth	2.0-in
Weight	1.0-lbs

Shipping Dimensions

Length	10.0-in
Height	3.5-in
Depth	3.5-in
Weight	1.5-lbs

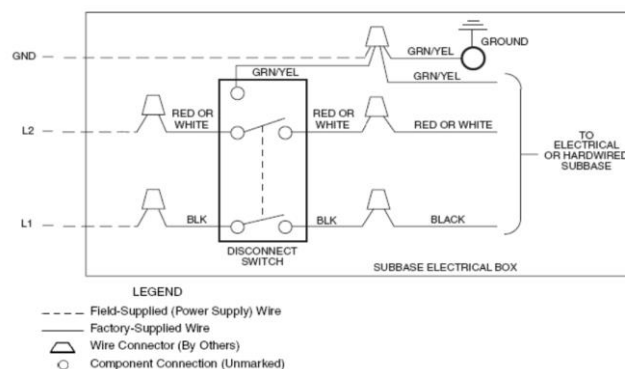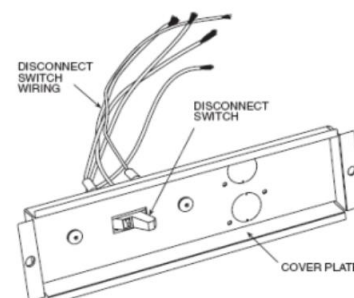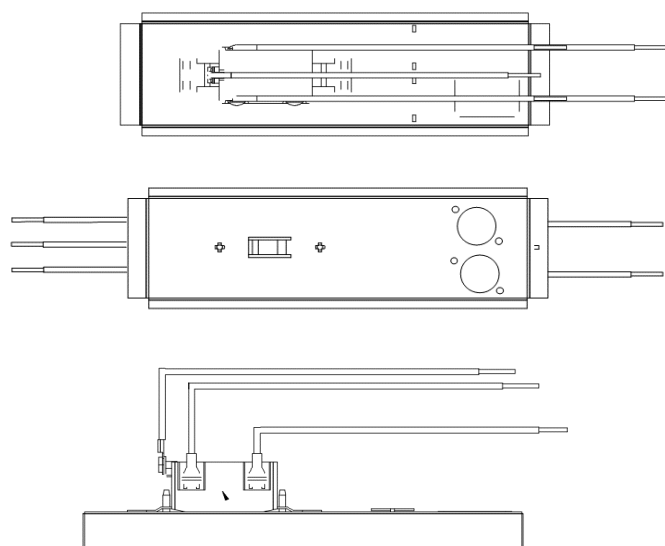

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

Submittal Data: AYDSW220B

PTAC Subbase Switch 265v 20A Accessory

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For ☐ Reference ☐ Approval ☐ Construction	
Schedule No.		

GENERAL FEATURES

- Provides a physical power disconnect for a PTAC unit.
- Rated for 208/230 & 265 volts up to 30 amps.
- Includes a prewired power DPST switch.
- Mounts quickly and easily in the subbase.
- Cannot be used with Part No. AYSB6101



Specifications

Physical:

Color: Black
Finish: Powder coated paint

Electrical:




Voltage Rating: 208/230/265v
Current Rating: 30 amp
Switch Type: DPST

Unit Dimensions

Length	8.25-in
Height	2.75-in
Depth	2.0-in
Weight	1.0-lbs




Shipping Dimensions

Length	10.0-in
Height	3.5-in
Depth	3.5-in
Weight	1.5-lbs

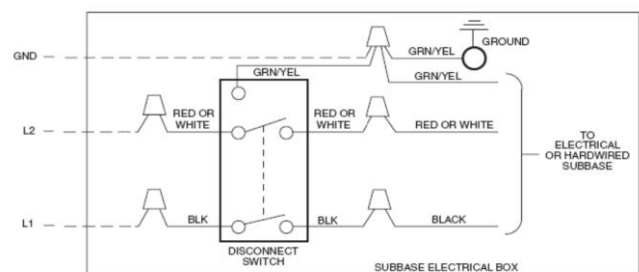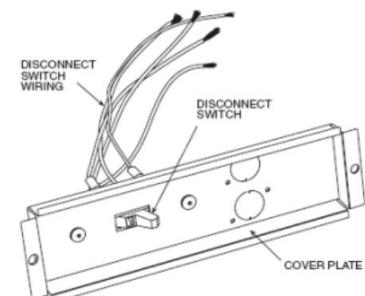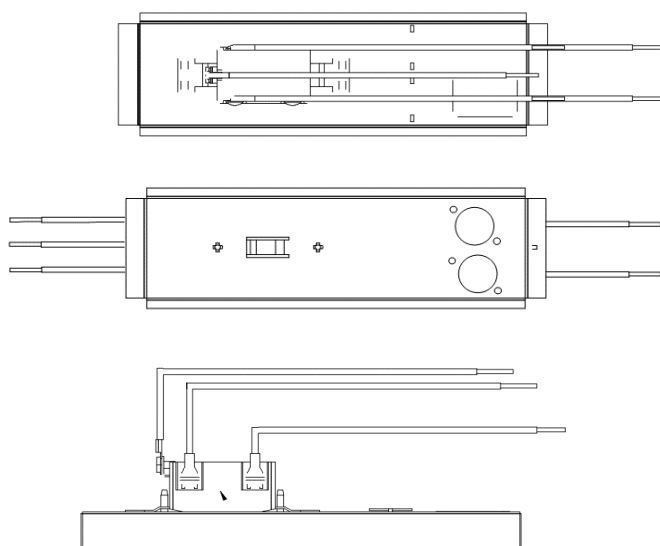

- LEGEND
- Field-Supplied (Power Supply) Wire
 - Factory-Supplied Wire
 - △ Wire Connector (By Others)
 - Component Connection (Unmarked)

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

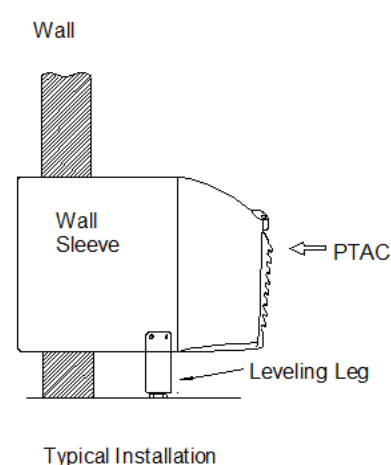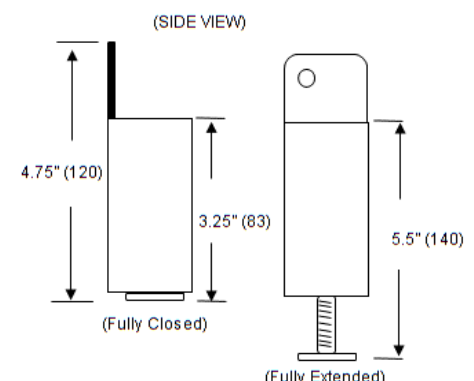Submittal Data: AYLL101B		PTAC Leveling Legs																			
Job Name	Location	Date																			
Purchaser	Engineer																				
Submitted To	For	☐ Reference	☐ Approval ☐ Construction																		
Schedule No.																					
GENERAL FEATURES - Adjustable height of 3¼ to 5½ inches from finished floor. - Made of heavy gauge steel. - Mounts easily and securely to standard wall sleeve. - Two (2) legs per pack.																					
Specifications Material: Steel Material Thickness*: 0.0433 to 0.0480-in Color: Black Finish: Powder coated paint * including paint.		Unit Dimensions <table> <tr><td>Length</td><td>3.25-in</td></tr> <tr><td>Height</td><td>1.5-in</td></tr> <tr><td>Depth</td><td>1.5-in</td></tr> <tr><td>Weight</td><td>1.0-lbs</td></tr> </table> Shipping Dimensions <table> <tr><td>Length</td><td>5.0-in</td></tr> <tr><td>Height</td><td>2.0-in</td></tr> <tr><td>Depth</td><td>3.25-in</td></tr> <tr><td>Weight</td><td>1.0-lbs</td></tr> <tr><td>Pallet Qty</td><td>2920 pcs</td></tr> </table>		Length	3.25-in	Height	1.5-in	Depth	1.5-in	Weight	1.0-lbs	Length	5.0-in	Height	2.0-in	Depth	3.25-in	Weight	1.0-lbs	Pallet Qty	2920 pcs
Length	3.25-in																				
Height	1.5-in																				
Depth	1.5-in																				
Weight	1.0-lbs																				
Length	5.0-in																				
Height	2.0-in																				
Depth	3.25-in																				
Weight	1.0-lbs																				
Pallet Qty	2920 pcs																				
 Typical Installation		Units: Inch(mm) (TOP VIEW)  (SIDE VIEW) 																			
NOTES: 1) Accessory Leveling Legs are required for applications where wall sleeve extends 4 or more inches into the room or wall thickness is less than 2 inches. 2) For proper fit, wall sleeve must be installed 3-1/4 inches (minimum)																					
Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.																					

Submittal Data: AYLD1A

Lateral Duct

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For ☐ Reference ☐ Approval ☐ Construction	
Schedule No.		

GENERAL FEATURES

- One unit to heat or cool two separate rooms.
- Easily mounts to front of standard wall sleeve.
- Lined with acoustical & thermal insulation.
- 46-inch extension duct.
- Adjustable room duct register.
- Extension Duct may be directed to left or right side of the unit.



Specifications

Material: Steel
 Material Thickness*: 0.0433 to 0.0480-in
 Insulation: Dual-density Fiber Glass
 Insulation Thickness: 0.25-in
 Color: Soft Dove
 Finish: Lightly Textured

* including paint.



Dimensions

	Plenum w/out Transition	Extension Duct
Length	44.0-in	46-in
Height	3.5-in	3.5-in
Depth	7.0-in	7.0-in
Weight	11-lbs	12-lbs


Shipping Dimensions

Length	47.5-in
Height	8.0-in
Depth	11.5-in
Weight	30.0-lbs
Pallet Qty	15 pcs


Units: Inch(mm)

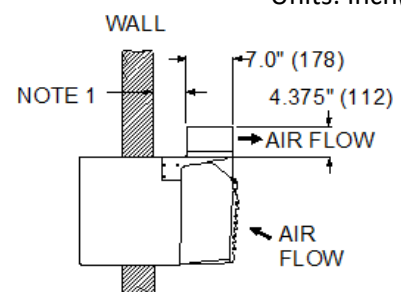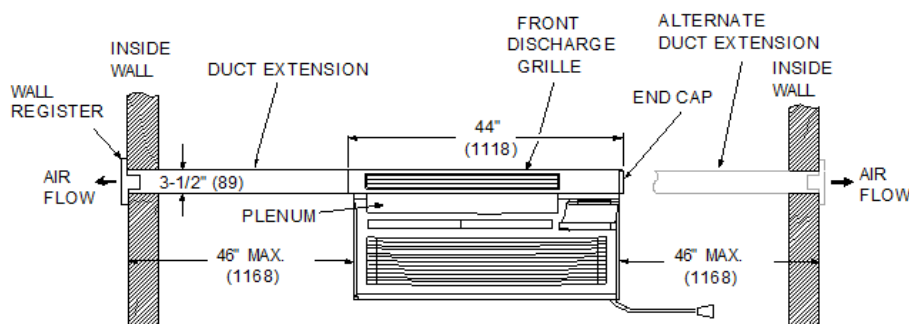

EXTENSION DUCT
WALL OPENING



SIDE VIEW

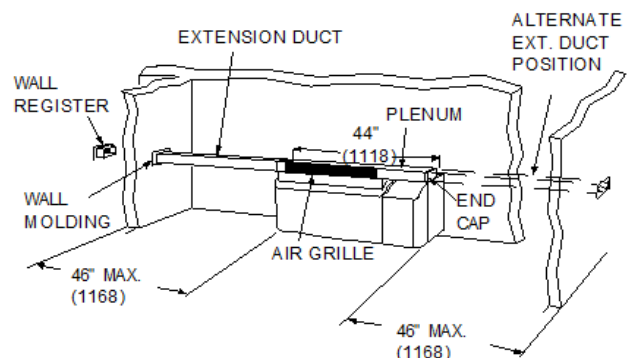

NOTES:

- 1) For all lateral duct applications, the wall sleeve must extend 3 inches into the room for proper mounting of support brackets.
- 2) Maximum duct extension length is 46 inches.
- 3) Extension duct run must be straight and horizontal; no bends or turns.
- 4) Minimum recommended clearance between unit and adjoining room wall is 6 inches.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.



For more information visit www.lgptac.com

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.