

Job Name/Location:

Tag #:

Date:

For: ☐ File ☐ Resubmit

PO No.:

☐ Approval ☐ Other _____

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)



Packaged Terminal Air Conditioners (PTAC) Heat Pump Models



Model	Cooling Capacity (Btu/h)	EER ¹	Heating Capacity (Btu/h)	COP ²	Net Weight (lbs)	Shipping Weight (lbs)	Sound Pressure IDU ³ /ODU ⁴ (dBA)	Air Circulation H/L (CFM)	Dehumidification (pts/hr)	Power Supply (V/Hz/Ph)	Electric Heater (kW)	MOP ⁵ (A)	MCA ⁶ (A)	Cooling Rated Amps (A)	Heating Rated Amps (A)	Cooling Power Input (W)	Heating Power Input (W)
LP076HD2A	7,300	11.2	6,100	3.1	97.9	110.2	45/61	265/235	1.5	265/60/1	2.0	15	9.7	2.7	2.5	655	575
LP076HD3A	7,300	11.2	6,100	3.1	97.9	110.2	45/61	265/235	2.0	265/60/1	3.7	20	17.6	2.7	2.5	655	575
LP096HD3A	9,200	10.8	8,200	3.2	107.4	119.7	46/61	290/260	2.2	265/60/1	3.5	20	17.7	3.4	3.0	865	750
LP126HD3A	11,800	10.4	10,700	3.2	107.4	119.7	50/63	346/316	2.4	265/60/1	3.5	20	17.7	4.5	3.9	1,135	980
LP156HD3A	14,700	9.4	12,100	2.6	116.0	128.3	51/64	388/358	4.1	265/60/1	3.5	20	17.7	6.0	5.4	1,560	1,360
LP156HD5A	14,700	9.4	12,100	2.6	116.0	128.3	51/64	388/358	4.6	265/60/1	5.0	30	26.3	6.0	5.4	1,560	1,360

1: EER - Energy Efficiency Ratio

4: ODU - Outdoor Unit

2: COP - Coefficient of Performance

5: MOP - Maximum Overcurrent Protection

3: IDU - Indoor Unit

6: MCA - Minimum Circuit Ampacity

Standard Features:

- Limited Warranty with LG Certified Installation
 - Limited Five Year Parts and Labor Warranty on sealed refrigerant system
 - Limited One Year Full System Warranty on Parts and Labor, 2-5 Year Parts
- Auto restart
- Digital control display
- Dip switch setting for temperature limiting
- Energy saver mode
- Freeze room protection
- Fresh air ventilation (70 CFM @ 0.3 external static pressure (ESP) with open damper door)
- Front desk control
- GoldFin™ anti-corrosion treatment for condenser
- High energy efficiency
- Temperature display on unit
- Ultra-quiet operation

Notes:

Sub Base assembly is mandatory for models rated 265V (Underwriters Laboratories (UL) standard).

Optional Accessories:

- | | |
|--|--|
| ☐ Wall Sleeve - 42"W x 16"H x 13-3/4"D (AYSVB01A) | ☐ Built-in Control Cover Kit 10 Pack (AYRE110) |
| ☐ Stamped Aluminum Grille (AYRGALA01) | ☐ Wall Thermostat Connection Kit (AYWH101) |
| ☐ Architecture Grille - Aluminum (AYAGALA01A) | ☐ EMS/Front Desk Control Connection Kit (AYFD101) |
| ☐ Architecture Grille - Dark Bronze (AYAGALB01A) | ☐ Condensate Drain Kit (AYDR101) |
| ☐ Architecture Grille - Soft Dove (AYAGALC01A) | ☐ Hard Wire Kit (AYHW101) |
| ☐ Sub Base 265V 20A (AYS3101A) | ☐ Replacement Filter 10 Pack (AYFT110) |
| ☐ Sub Base 265V 30A (AYS4101A) | ☐ Control Panel Key Lock (AYCO101) |
| ☐ Lateral Duct Kit (AYLD1A) | |

Optional Wall Thermostats

- ☐ Wired Wall Thermostat (PYRCUCA0A)
- ☐ Wireless Wall Thermostat (PYRUCC0A)
- ☐ Current Tap for Wireless Thermostat (PYRUCC1A)
- ☐ Adapter Kit for Wireless Thermostat for GE (PYADTGE1A)
- ☐ Adapter Kit for Wireless Thermostat for Amana (PYADTAM1A)

For continual product development, LG reserves the right to change specifications without notice.

LG Electronics U.S.A., Inc., Englewood Cliffs, NJ. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. /www.lgvac.com

PAC-SB-FA-006-US 012E30

Page 1 of 2



Packaged Terminal Air Conditioners (PTAC)
Heat Pump Models



Tag #:

Date:

PO No.:

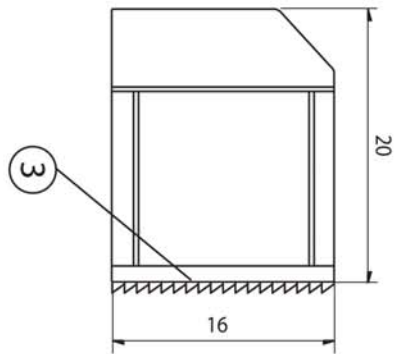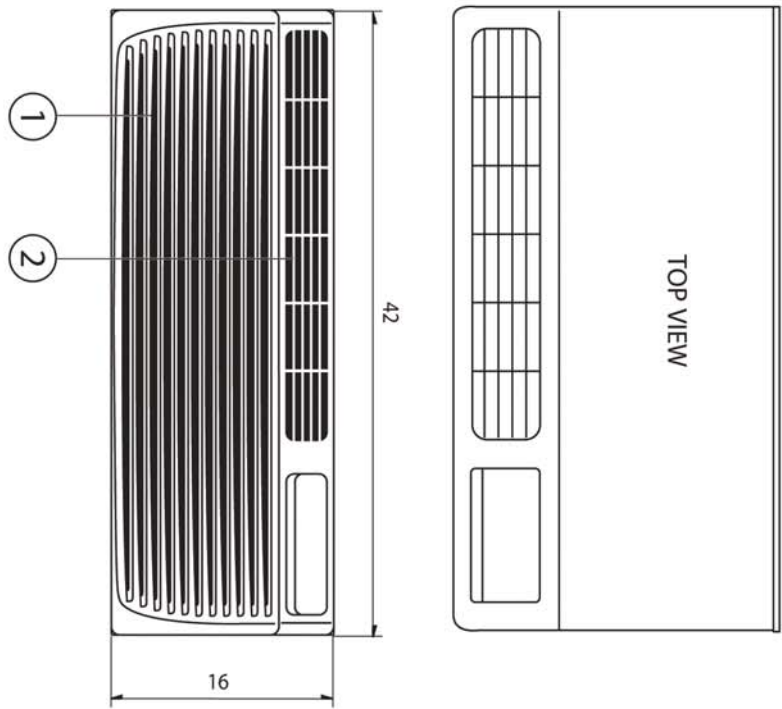

Unit: inch

Item No.	Part name	Remarks
1	Inlet Grille	
2	Vertical Air Deflector	
3	Architectural Grille	