
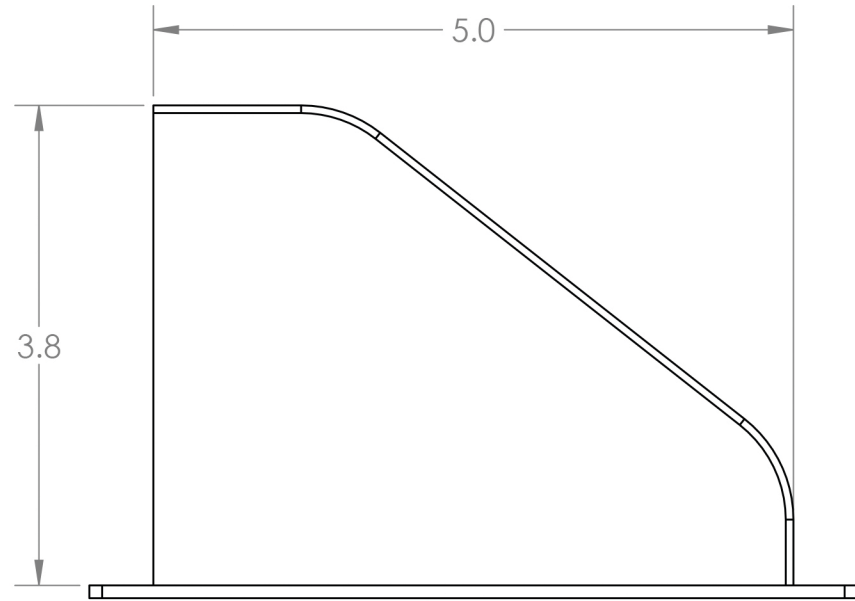
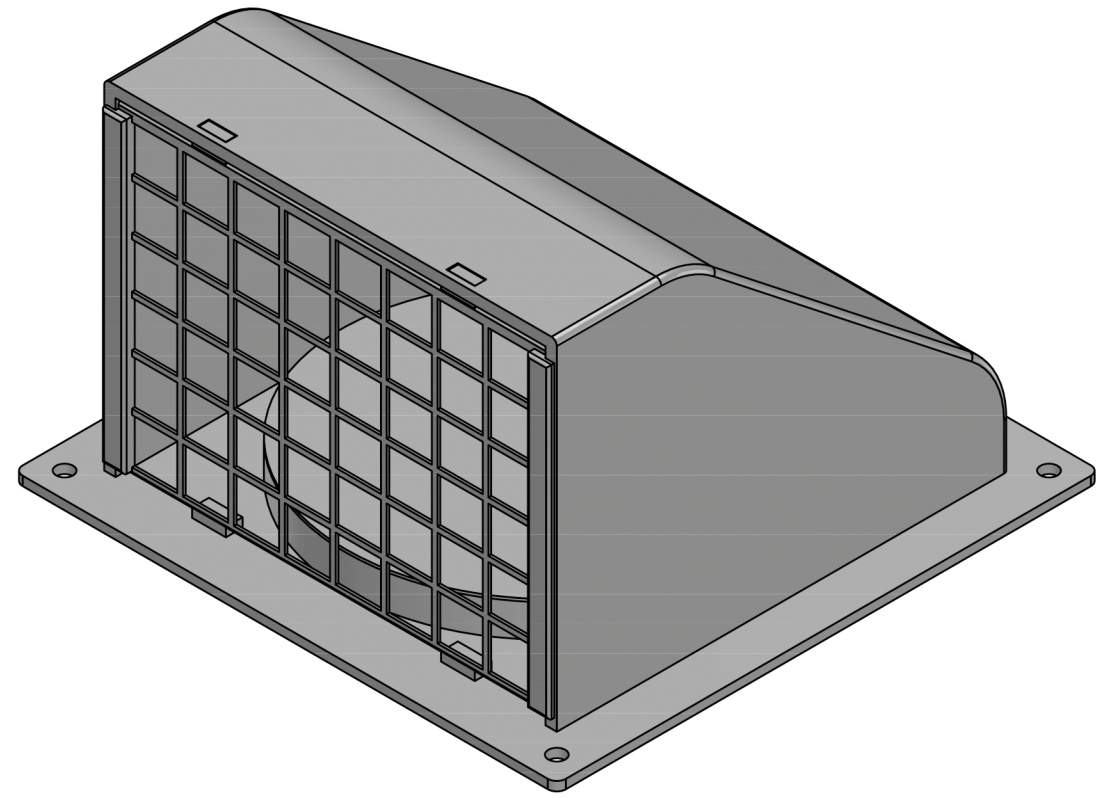
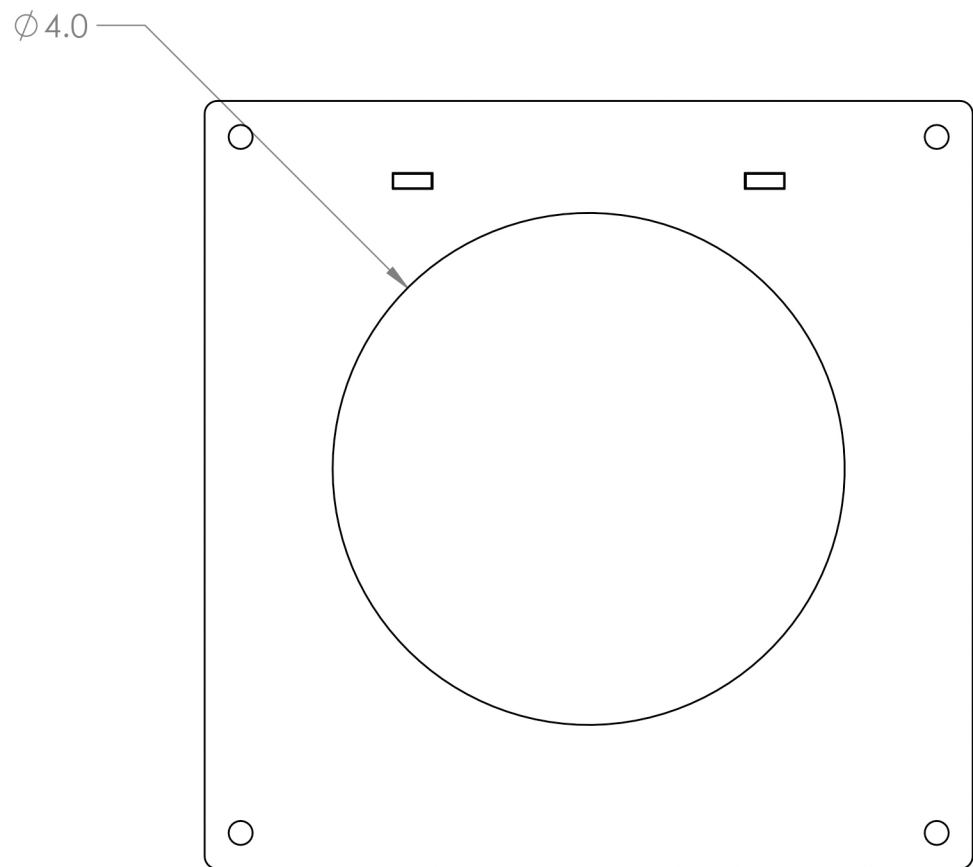
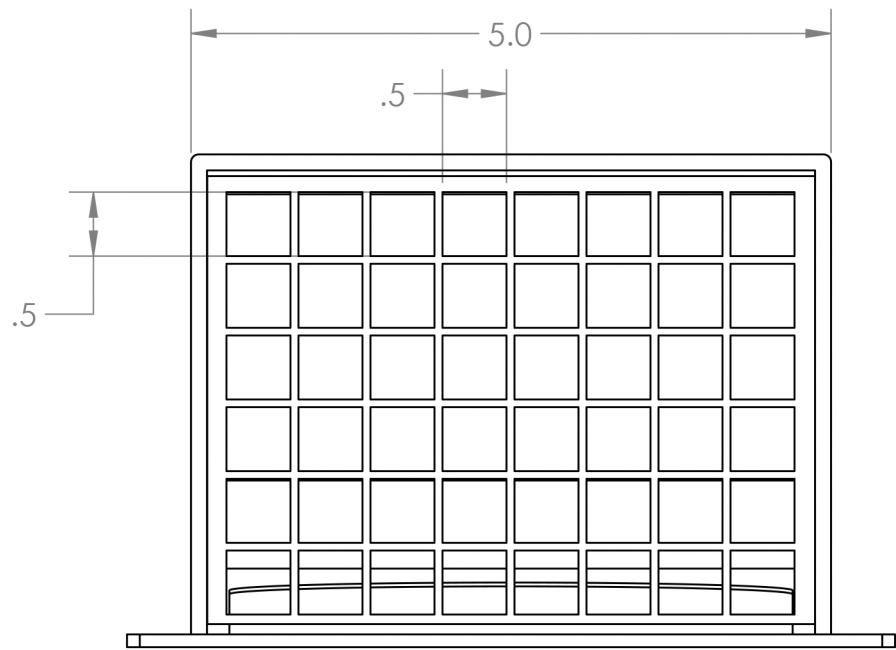


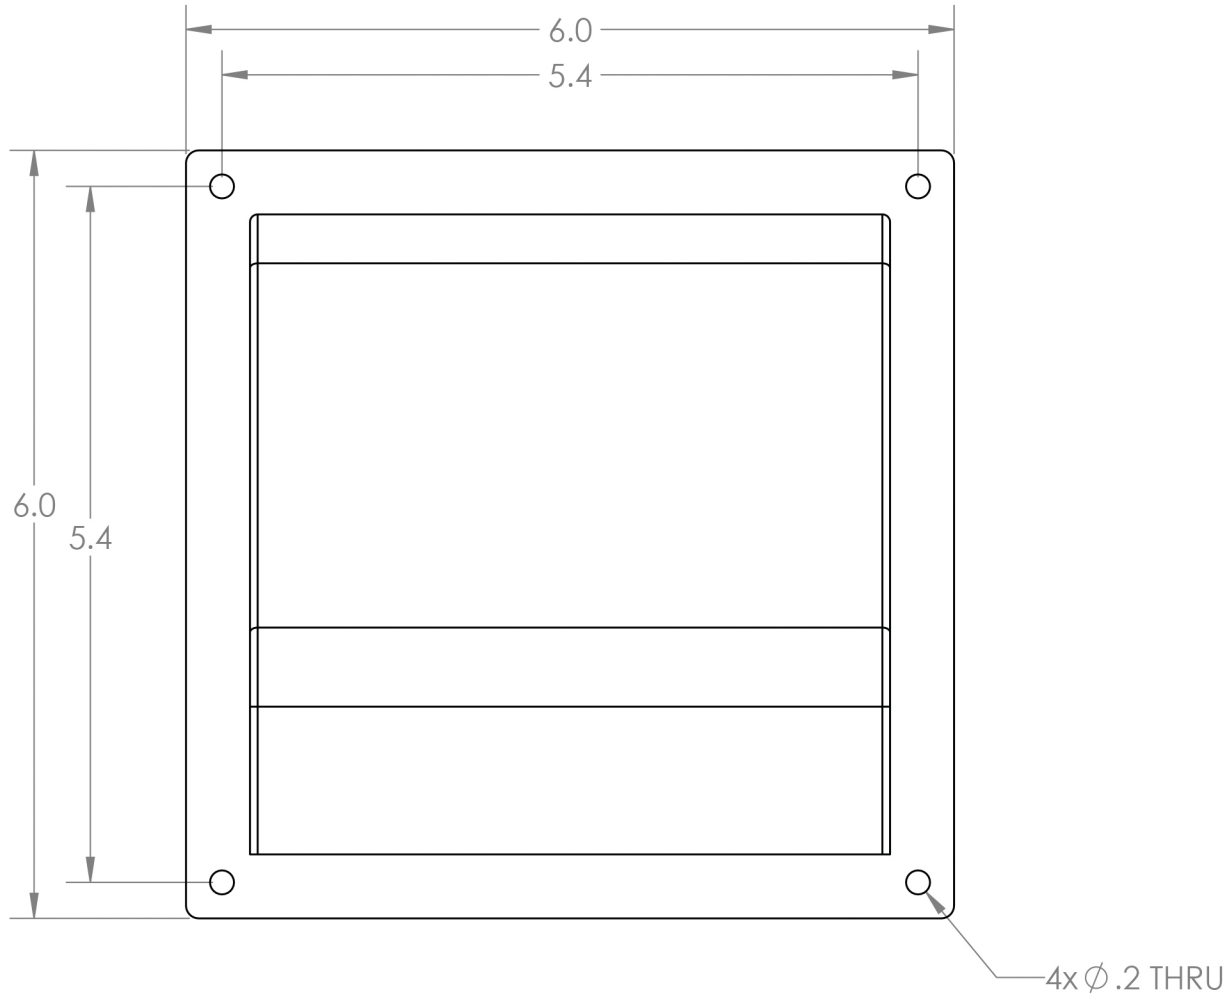

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LAMBRO. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF LAMBRO IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:			NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL $\pm 1/16$ ANGULAR: MACH $\pm 1^\circ$ BEND $\pm .01$ TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005	NEXT ASSY	USED ON	DRAWN	
			CHECKED	
			ENG APPR.	
			MFG APPR.	
INTERPRET GEOMETRIC TOLERANCING PER:			Q.A.	
MATERIAL			COMMENTS:	
FINISH			Net Free Area (NFA)	
APPLICATION		DO NOT SCALE DRAWING	Without Screen: 17 sq. in. With Screen: 12.5 sq. in.	
			Spring Controlled Damper	

LAMBRO Lambro Industries, Inc.
115 Albany Ave.
Amityville, NY 11701
(631) 842-8088
www.lambro.net

TITLE: 4" Plastic Wall Exhaust Hood Vent
Flat Flange - Spring Damper
Removable Screen - Flush Mount
Made of polymer resin material with UV inhibitor
used to help prevent the premature fading of vent

SIZE DWG. NO.
C 1471W-FF-NC-SPG

SCALE: 1:1.5WEIGHT: SHEET 1 OF 1