

# The Leviton Load Center Meter Main

## UG/OH Service Entrance with Main Breaker Disconnect and Feed-thru Lugs

### APPLICATION

Leviton Load Center Meter Main Panels combine the Meter and Main Breaker into one easy-to-install unit. Each Meter Main includes 8 spaces to enable easy wiring of outdoor circuits. Featuring the fastest installing circuit breakers on the market and GFCI breakers that exceed the UL standard, Leviton Load Centers are the smart choice for your next power distribution job.

### FEATURES AND BENEFITS

**FASTEST INSTALLATION** - Wire the entire panel without a single circuit breaker in place. At final installation, simply plug on the breaker.

**INTUITIVE** - Circuit Breakers feature color indicators in the handle for operational status at-a-glance

**SPACIOUS** - Ample room for hands to move and work freely

- NEMA 3R
- Meter Equipment Group (MEG) Approved
- Includes internal trough to enable branch wiring through top of enclosure
- UL listed
- 22kA Interrupt Rating
- In Compliance with Standards UL 50, UL 50E, UL 67, NEMA type 3R
- Powder Coated

*\*Other meter main options available, see [leviton.com/loadcenter](http://leviton.com/loadcenter)*



THE LEVITON LOAD CENTER METER MAIN COMBINATION PANELS

# PRODUCT SPECIFICATIONS

## Meter Main, UG/OH Service Entrance with Main Breaker Disconnect and Feed-Through Lugs

| Amp Rating | # of Spaces/Circuits | Catalog Number | Bypass | Cover      |
|------------|----------------------|----------------|--------|------------|
| 150        | 8                    | LP815-TMC*     | None   | Ringless** |
| 200        | 8                    | LP820-TMC*     | None   | Ringless** |

### SPECIFICATIONS

**Warranty:** 10-Year Limited

### ELECTRICAL SPECIFICATIONS

**Short Circuit Current Rating:** 22 KA

**Spaces/Circuits:** 8/8

**Type:** Outdoor

**Type of Load Center:** Main Breaker

**Voltage:** 120/240 VAC

### MECHANICAL SPECIFICATIONS

**Busbar Material:** Copper, Bright Tin-Plated

**Enclosure Material:** Galvanized Steel, Gray Powder Coated

**Ground Connection:** 4 AWG - 2/0 AWG Cu/Al

**Material:** Galvanized Steel

**Supply Connections:** 6 AWG - 350 MCM

**Weight:** 56.8 lbs.


### STANDARDS & CERTIFICATIONS

**UL 50:** Yes

**UL 50E:** Yes

**UL 67:** Yes

**UL 869A:** Yes

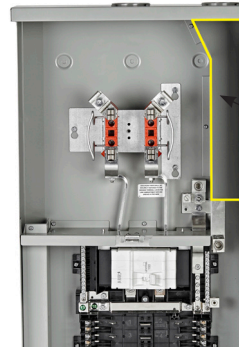


Internal trough facilitates OH wiring

### DIMENSIONAL DRAWINGS

**Cat. No. LP815-TMC, LP820-TMC**

Meter Socket Over/Under Construction - 150 & 200 Ampere, Ringless Type

**Dimensions:** 37.05" x 16.47" with cover and door installed

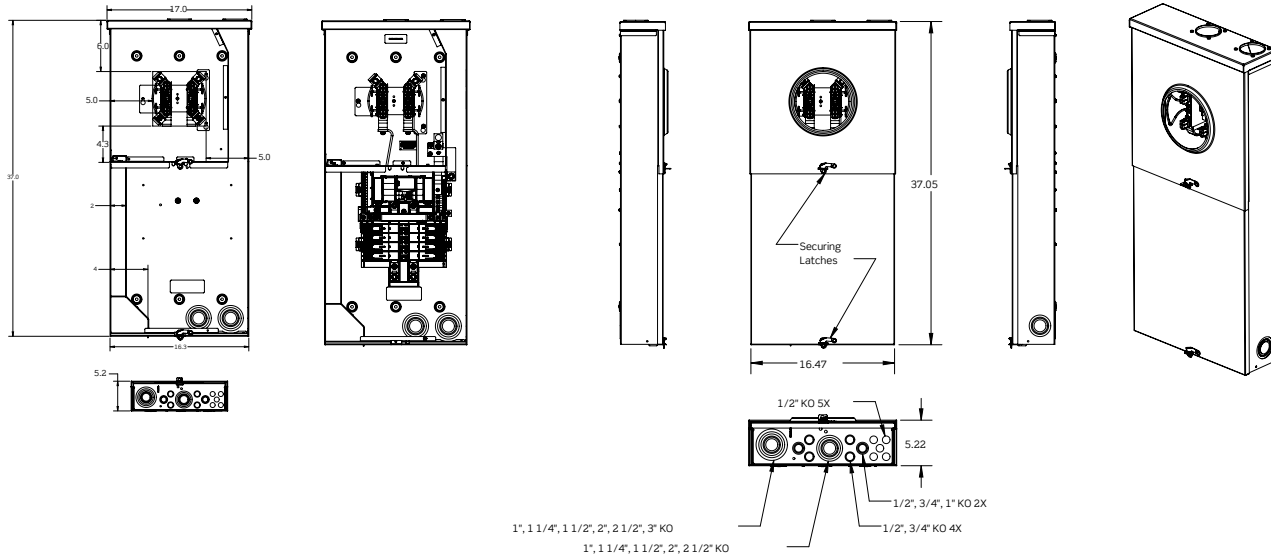

THE LEVITON LOAD CENTER METER MAIN COMBINATION PANELS



**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747-3138  
 Telephone: 1-800-323-8920 • FAX: 1-800-832-9538  
 Tech Line: 1-800-824-3005  
 Mon-Fri 8am-10pm EST, Saturday 9am-7pm EST

Visit our Website at: [www.leviton.com/loadcenter](http://www.leviton.com/loadcenter)

© 2021 Leviton Manufacturing Co., Inc. All rights reserved.

GR-011221-dp