

T5633-B

5.1A USB Type A/Type-C Wall Outlet Charger with 15A Tamper-Resistant Outlet

15 Amp, 125 Volt, Decora Tamper-Resistant Outlet. NEMA 5-15R, 25+W (5.1 Amp), Type A and Type-C USB In Wall Charger, Grounding, Side Wired & Back Wired - Brown




Color :  Brown

UPC Code : 078477841365

Country Of Origin : Mexico

NEMA :  5-15R

Available Colors :

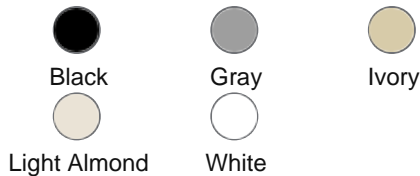

- SMART – Built-in smart chip recognizes the individual device's charging requirements to optimize the charge (Does not provide Power Delivery. See Leviton [T5635](#))
- POWERFUL - Two high-powered charging ports deliver a combined total of 5.1A charging current and 25+ watts of power
- CONVENIENT – No more searching for charging adapters! Upgrade so you can charge electronics leaving the outlets free for additional power needs
- THE FUTURE OF CHARGING – USB Type-C provides faster charging and is emerging as the standard port on many phones, tablets and laptops
- ENHANCED SAFETY – Built-in overcurrent protection helps protect electronics from receiving too much power, which can damage the device

Technical Information

Electrical Specifications

Amperage : 15 A

Body Material : Thermoplastic

Color : Brown

Cover Material : Thermoplastic

Grounding : Grounding

Horsepower Rating : 15A-1/2 HP

Strap Material : Steel

Material Specifications

Body Material : Thermoplastic

Color : Brown

Cover Material : Thermoplastic

Grade : Commercial Specification Grade

Strap Material : Steel

Product Features

Environmental Specifications

Flammability : Rated V-0 per UL 94

Operating Temperature : -10° C to 40°C

Product ID : Stamped on Strap

Terminal Accom. : 14-12 AWG

Terminal ID : Brass-Hot Black-Hot White-Neutral Green-Gnd

Torque Range : 14 – 18 in.-lbs

Mechanical Specifications

Listed : cCSAus

NOM : 057

Product ID : Stamped on Strap

Terminal Accom. : 14-12 AWG

Terminal ID : Brass-Hot Black-Hot White-Neutral Green-Gnd

Termination : Back & Side

Torque Range : 14 – 18 in.-lbs

Warranty : 2-Year Limited

Standards & Certifications

Amperage : 15 A
Brand : Decora
Color : Brown
Grade : Commercial
Specification Grade
Grounding : Grounding
Horsepower Rating : 15A-1/2
HP
NEMA : 5-15R
Product Type : Outlet/USB
Combo
Ratings : 15A-125V
Type : Type A/C Duplex
Receptacle
Voltage : 125 VAC
Wallplate : Not Included

FCC Part 15 : Class B
Listed : cCSAus
NOM : 057
UL 1310 : Yes
UL 498 : Yes
Warranty : 2-Year Limited

Features and Benefits

- Independently tested and guaranteed to exceed all component, permanent link, and channel margins
- Patented Retention Force Technology™ (RFT) protects against tine damage and increases system longevity
- For Power over Ethernet, RFT maintains contact force between plug and jack, preventing arcing from intermittent disconnects
- Unique design supports tool-free termination/re-termination and requires no specialized termination tool
- Short jack design supports a wider range of applications (e. g. shallow boxes, enclosures, bend radius, etc.)
- Terminates from 26 to 22-gauge solid or stranded conductors for use on various cable types
- Robust IDCs can withstand 20 re-termination cycles and jack contacts are tested for 750 plug-mating cycles to ensure system longevity
- Available in 14 ANSI/TIA-606-C compatible colors
- Select jacks available with interchangeable icons (voice, data, A/V, and blank, color coded to match the jack face), for easy identification and tracking of data, voice, or other functions
- Jack with internal shutter protects against dust and debris
- Solid metal body dissipates 53% more heat than traditional plastic, minimizing damage from excess heat in PoE applications
- Tine geometry prevents arcing damage where plug and jack make contact
- Will exceed IEEE 802.3bt standard up to 0.5 amps per conductor (100 watts) continuously
- ETL verified to meet the IEC 60512-99-002 standard for support of IEEE 802.3bt Type 4 PoE (90-watt) applications

Patents*

USD752590

USD818469

USD848430

USD901509

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·
FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)
5386- 1797 ·

Visit our Website at: www.leviton.com

© 2025 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without
notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/company/about-leviton/locations

© 2025 Leviton Manufacturing Co., Inc.