


# Decora Plus™ Duplex Receptacles

## Heavy-Duty Industrial Specification Grade

### Tamper-Resistant

### 15 A & 20 A, 125 V

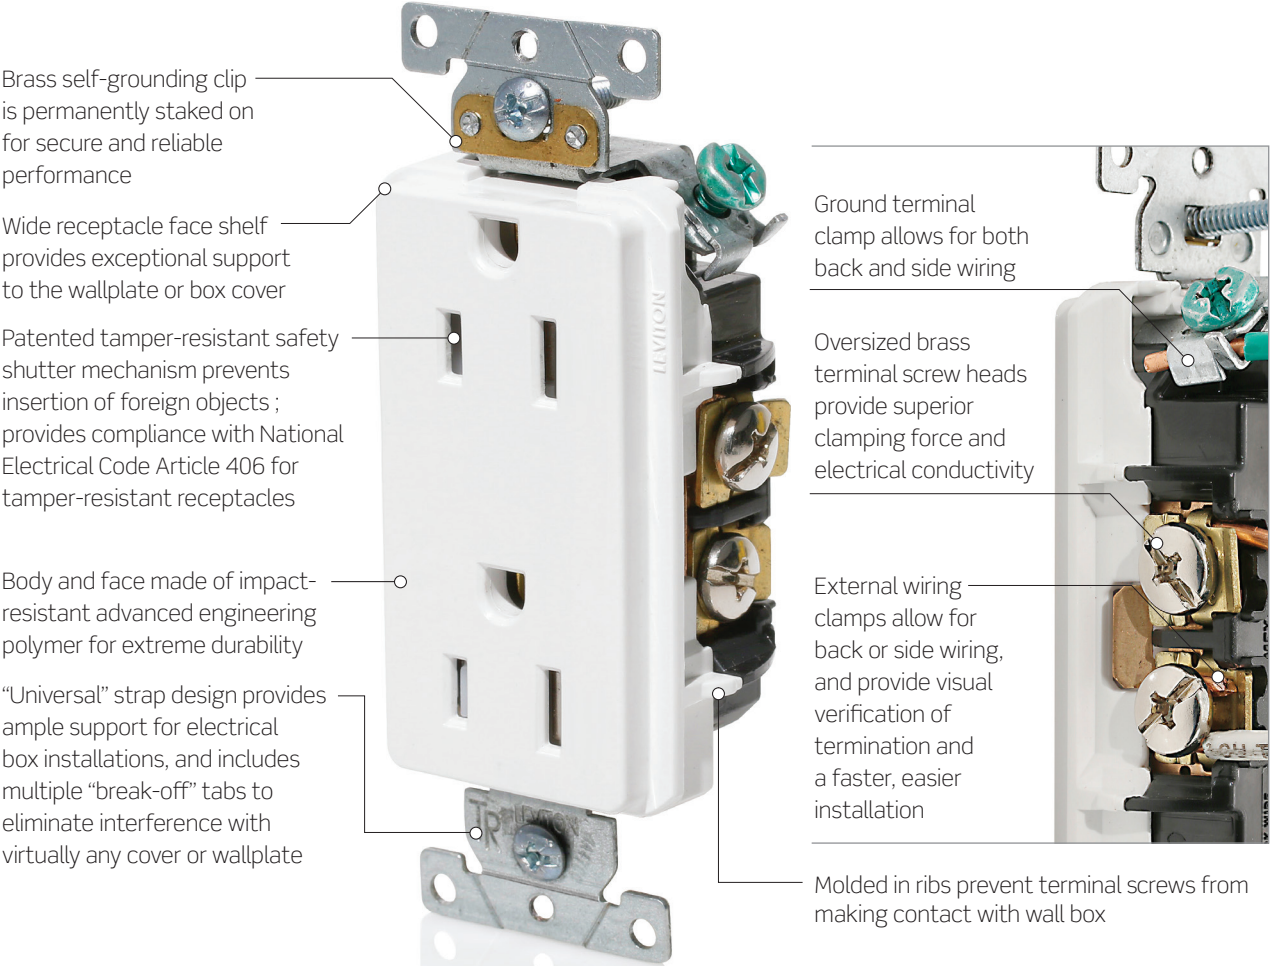

**Common Applications:**

- Educational Facilities
- Office Environments
- Commercial/Retail Facilities
- Hospitality
- Day Care Centers

**Ordering Information**

| Ratings      |              | 15 A/ 125 V | 20 A/ 125 V |
|--------------|--------------|-------------|-------------|
| NEMA Config. |              | 5-15R       | 5-20R       |
| Order ID     | Brown        | TDR15       | TDR20       |
|              | White        | TDR15-W     | TDR20-W     |
|              | Gray         | TDR15-GY    | TDR20-GY    |
|              | Black        | TDR15-E     | TDR20-E     |
|              | Ivory        | TDR15-I     | TDR20-I     |
|              | Light Almond | TDR15-T     | TDR20-T     |
|              | Red          | TDR15-R     | —           |
|              | Blue         | TDR15-BU    | —           |


## Specifications

| Series                       | TDR15                                                 | TDR20 |
|------------------------------|-------------------------------------------------------|-------|
| AC Horsepower Rating         |                                                       |       |
| At Rated Voltage             | ½ HP                                                  | 1 HP  |
| Electrical Specifications    |                                                       |       |
| Amperage                     | 15 A                                                  | 20 A  |
| NEMA                         | 5-15R                                                 | 5-20R |
| Voltage                      | 125 V                                                 |       |
| Grounding                    | Self-Grounding*                                       |       |
| Pole                         | 2                                                     |       |
| Wire                         | 3                                                     |       |
| Dielectric Voltage           | Withstands 3000 V min                                 |       |
| Temperature Rise             | Max 30 °C temperature rise at full rated current      |       |
| Environmental Specifications |                                                       |       |
| Flammability                 | UL94 V0                                               |       |
| Operating Temperature        | Maximum Continuous 75 °C, minimum -40 °C (w/o impact) |       |
| Material Specifications      |                                                       |       |
| Face                         | PBT Polyester Blend                                   |       |
| Body                         | PBT Polyester Blend                                   |       |
| Strap                        | Steel (Galvanized G60)                                |       |
| Ground Contact               | 0.030" Brass                                          |       |
| Ground Screw                 | #8 Hex Head, Triple-Drive Brass                       |       |
| Ground Clamp                 | Steel                                                 |       |
| Mounting Screw               | Triple-Drive Plated Steel                             |       |
| Line Contacts                | 0.030" Phosphor Bronze                                |       |
| Terminal Clamp               | Brass                                                 |       |
| Terminal Screws              | #8 Triple-Drive Brass                                 |       |
| Ground Clip                  | Brass                                                 |       |
| Shutter Mechanism            | Acetal                                                |       |
| Mechanical Specifications    |                                                       |       |
| Product ID                   | Ratings are permanent part of devices                 |       |
| Terminal ID                  | Brass - Hot, Silver - Neutral, Green - Ground         |       |
| Terminal Accommodation       | #14 - #10 AWG                                         |       |
| Wire Types                   | Stranded or Solid                                     |       |
| Termination                  | Back and Side Wire                                    |       |
| Standards & Certifications   |                                                       |       |
| NEMA                         | WD 1 & WD 6                                           |       |
| ANSI                         | C-73                                                  |       |
| Certification/Listing        | cULus, NOM-ANCE                                       |       |
| Applicable Standards         | UL498, Fed Spec W-C-596, CSA C22.2 No.42              |       |
| RoHS                         | RoHS Compliant                                        |       |
| Warranty                     |                                                       |       |
| Product Warranty             | 10 Years                                              |       |


\* Self-grounding when installed in a properly grounded metallic box

## Dimensions

Front View

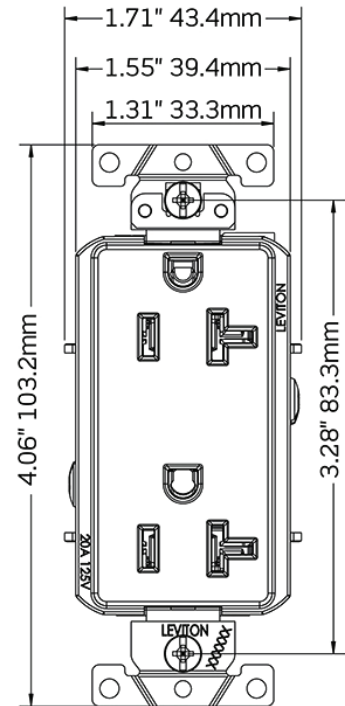

Side View

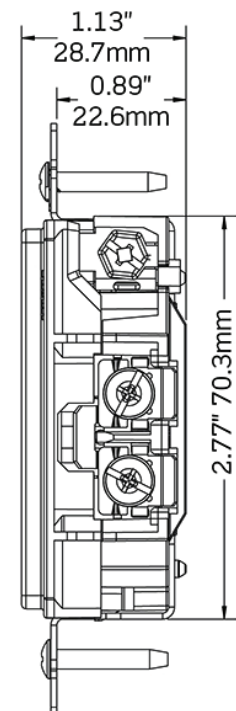

Visit our Website at:  
[www.leviton.com/commercial](http://www.leviton.com/commercial)  
 email: [commercial@leviton.com](mailto:commercial@leviton.com)

Q-1080

100417

### Leviton Manufacturing Co., Inc.

201 N Service Rd, Melville, NY 11747  
 Telephone: 1-800-323-8920 • FAX: 1-800-832-9538  
 Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

© 2017 Leviton Manufacturing Co., Inc. All rights reserved.

