

Liberty Pumps®

ProVore™ 380



US Patent #s
7,520,736, 7,563,082,
7,159,806 & 8,523,532

**Shipped with
Clear Construction Cover**



Clear disposable cover protects the system during masonry work and rough-in.

Residential Simplex Grinder System

**1 hp
2" Discharge**

**Compact simplex system -
designed for residential
sewage applications**

**Perfect for basement
bathroom additions and
remodeling projects**

Available in 115V or 230V

Fully assembled from factory

Features:

- Robust system features a compact heavy-duty polyethylene basin and cover
- System can be installed above or below floor level
- 41 gallon capacity
- Patented V-Slice® cutter technology shreds difficult solids such as feminine products, rags, towels and wipes that can jam solids-handling pumps
- Easy access cover with QuickTree® technology – allows for quick float removal and servicing
- Heavy-duty integrated rubber gaskets on covers
- Secure 16 bolt cover standard on all models. Passes 10' stack test

innovate. evolve.

ProVore® 380

QuickTree® Technology

Features:

- QuickTree® technology allows easy access and removal of switches without disturbing pump or plumbing.
- Integrated rubber seals permanently attached to cover.
- Unique cord seal technology integrated into the inspection cover.
- Shallow basin design (24") for easier installation in difficult soil/bedrock locations.
- Large 41 gallon capacity for longer pump cycles.
- Integrally molded torque stops secure the pump in its proper position.
- Integrally molded anti-flotation collar.
- Durable polyethylene construction.
- Completely assembled.

QuickTree® Technology

Integral Rubber Seals



Unique integrated cord seal technology and permanent rubber cover gaskets.

Models:


| MODEL | HP | VOLTS | PHASE | AMPS | DISCHARGE | CORD LENGTH | WGT. LBS. |
|--------------|----|-------|-------|------|-----------|-------------|-----------|
| P382XPRG101 | 1 | 115 | 1 | 12 | 2" | 10' | 87 |
| P382XPRG101V | 1 | 115 | 1 | 12 | 2" | 10' | 87 |
| P382XPRG102 | 1 | 230 | 1 | 6 | 2" | 10' | 87 |

"V" model = vertical float. All other models are wide-angle.

See specific PRG-Series literature for complete pump performance and specifications.

For 25' power cord add "-2" suffix to model number. Example: P382XPRG101-2

For side discharge models see ProVore SD-Series literature.

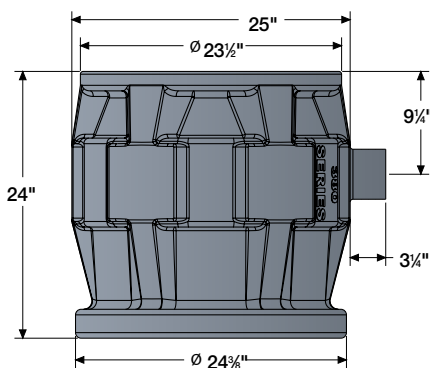

ProVore® 380-Series 24" x 24" – 41 Gallons

1 hp. Residential Grinder Package

Integrated cord
seal technology

16 Stainless steel
cover bolts

Separate inspection
cover allows access to
switches

Integral rubber gaskets
permanently attached
to cover

41 gallon capacity for
longer pump cycles in
a shallow 24" design

QuickTree® removable
float system allows
easy access to switch –
separate from pump.
Stainless steel rod.

Integrally molded
no-hub type inlet, 4"

Schedule 80 PVC
discharge pipe

Molded anti-float collar

Integrally molded
"torque-stops" for
pump security


US Patent #s
7,520,736, 7,563,082,
7,159,806 &

NEW!
Liberty Pumps

NightEye™
Wireless Enabled Alarms
AVAILABLE

See back page for
ordering information

Performance Curve 60 Hz.

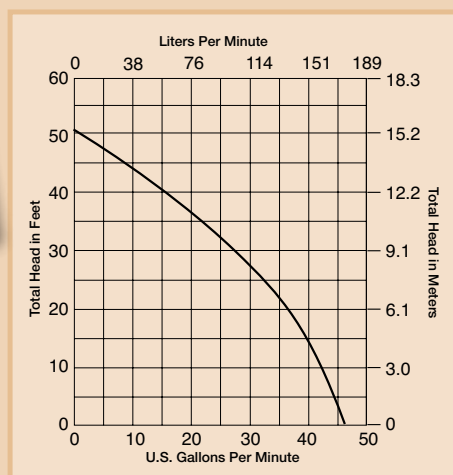

IAPMO Listed Basin

The ProVore® 380 Basin
is specifically designed
to pass a 10' stack test and
is IAPMO listed.



vate. evolve.

Riser allows burial of the ProVore®380 System up to a maximum depth of 18" below grade.

A convenient chamber for all your pump's electrical and piping connections – out of sight and below grade. Riser simply slides over the sealed 380 system. Cover is retained by 4 stainless steel bolts and features a twist-lock design with provision for padlock to deter unwanted entry.

Specifications:

Weight: 28 lbs.- (Riser and Cover)

Riser Height: 18-3/4"

Total Height with Cover: 20-1/2"

Diameter: 32"

| MODEL | DESCRIPTION |
|-----------|---|
| AR18 | Access Riser |
| AC18 | Access Riser Cover (Environmental Green) |
| ARC18 | Kit, Access Riser with Cover |
| ARCKIT115 | Kit, Access Riser with Cover and 2" installation accessories - 115V |
| ARCKIT230 | Kit, Access Riser with Cover and 2" installation accessories - 230V |
| IKIT2-115 | Installation Kit 2", 115V |
| IKIT2-230 | Installation Kit 2", 230V |

Optional Access Riser



Liberty's installation kits provide all the components for a professional installation inside the riser. Kit includes: JB-Series wiring box and hardware, check valve with a disconnect union feature, coupling and elbows (PVC piping not included). Kits available in 2" discharge and vent size only.

ProVore®380-Series Alarmed System

NEW!

Liberty Pumps

NightEye™
Wireless Enabled Alarm
AVAILABLE

Patent pending

FREE app download



ALM-2-EYE

Now have the assurance of early warning in the event of a high-level condition with an alarm option installed from the factory! We do the work for you by mounting the alarm float in the basin at its proper level – no need to even open the cover! Simply mount the alarm panel in its desired location, supply power, and connect the alarm float leads! Standard alarm and NightEye™ wireless alarm available.

How to Order:

| Alarm Model | Description | Add Suffix | Order Example |
|-------------|---------------------------|------------|--------------------|
| ALM-2 | Standard indoor | /A2 | P382XPRG101/A2 |
| ALM-2-EYE | NightEye™ wireless indoor | /A2-EYE | P382XPRG101/A2-EYE |

Alarm float is pre-set at proper level in basin. Alarm panel packaged with unit. See ALM or ALM-Eye Series literature for complete alarm specifications.

libertypumps.com

Liberty Pumps • 7000 Apple Tree Avenue • Bergen, New York 14416
Phone 800-543-2550 Fax (585) 494-1839

Specifications are subject to change without notice. Copyright © Liberty Pumps, Inc. 2016 All rights reserved. LLIT6711-R06/16