

Liberty Pumps®

Pro680-Series



Patent: See
www.libertypumps.com/patents



*Includes duplex
pump controller
and alarm with
plug-in ready
cords for quick,
easy installation!*

*Indoor and
outdoor models
available.*

Duplex Pump System

2" Discharge

**Compact duplex system -
designed for residential
and light commercial
sewage applications.**

**Perfect for basement
bathroom additions and
remodeling projects.**

Available in 115V or 230V.

Fully assembled from factory.

Features:

- Robust system features a compact heavy-duty polyethylene basin and cover
- Solids-handling and ProVore grinder models available
 - 46 Gallon capacity
- System can be installed above or below floor level
- Two pumps provide secure uninterrupted service
- Easy access cover with QuickTree® technology – allows for quick float removal and servicing
- Heavy-duty integrated rubber gaskets on covers
- Secure 16 bolt cover standard on all models. Passes 10' stack test

innovate. evolve.


Pro680

QuickTree® Technology

Features:

- QuickTree® technology allows easy access and removal of switches without disturbing pump or plumbing.
- Integrated rubber seals permanently attached to cover.
- Unique cord seal technology integrated into the inspection cover.
- Shallow basin design (24") for easier installation in difficult soil/bedrock locations.
- Large 46 gallon capacity for longer pump cycles.
- Integrally molded torque stops secure the pump in its proper position.
- Integrally molded anti-flotation collar.
- Durable polyethylene construction.
- Completely assembled.

Performance Curve 60 Hz.

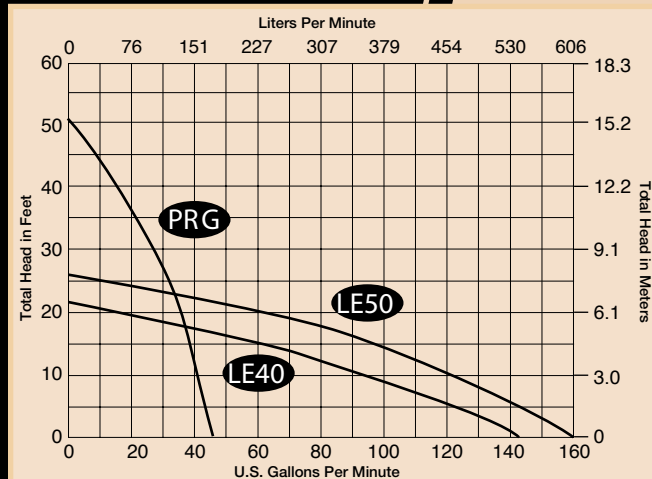

QuickTree® Technology

Integral Rubber Seals




Unique integrated cord seal technology and permanent rubber cover gaskets.

Floats are easy-to-service with QuickTree® Technology



24"

Patent: See www.libertypumps.com/patents

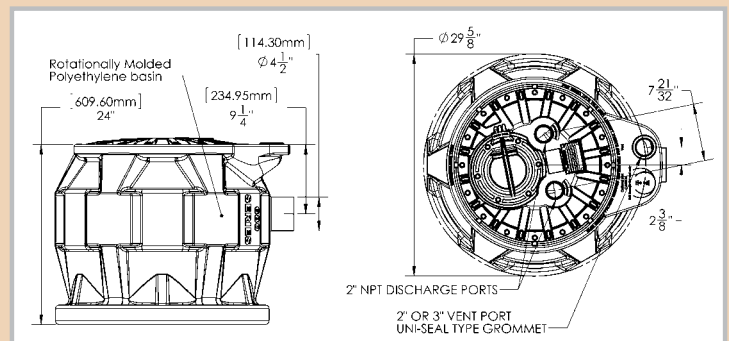

inno

Pro680-Series

Compact Duplex System



Patent: See
www.libertypumps.com/patents

Models:

MODEL	HP	VOLTS	PHASE	AMPS	DISCHARGE	CORD LENGTH	CONTROLLER	WGT. LBS.
<i>ProVore Grinder Models</i>								
P682XPRG101	1	115	1	12	2"	10'	Indoor	151
P682XPRG101W	1	115	1	12	2"	10'	Outdoor	152
P682XPRG102	1	230	1	6	2"	10'	Indoor	151
P682XPRG102W	1	230	1	6	2"	10'	Outdoor	152
<i>LE-Series Solids-handling Models</i>								
P682XLE41	4/10	115	1	12	2"	10'	Indoor	132
P682XLE41W	4/10	115	1	12	2"	10'	Outdoor	132
P682XLE51	1/2	115	1	12	2"	10'	Indoor	136
P682XLE51W	1/2	115	1	12	2"	10'	Outdoor	135
P682XLE52	1/2	230	1	6	2"	10'	Indoor	135
P682XLE52W	1/2	230	1	6	2"	10'	Outdoor	136

IAPMO Listed Basin

The Pro680 Basin is specifically designed to pass a 10' stack test and is IAPMO listed.



See PRG-Series or LE40/LE50-Series literature for complete pump performance and specifications data. For 25' pump and float cords, add "-2" suffix to model number. Example: P682XPRG101-2

vate. evolve.

Optional Basin Extension

X8-D

8" Basin Extension

Sealed basin extension increases Pro-Series height by 8", allowing longer pitched pipe runs to the inlet connection.

Model X8-D extension includes gasket, stainless steel bolts, longer QuickTree® for float mounting and discharge pipe extension.

To order X8-D extension factory assembled to any ProVore®-Series system, add "X8D" to model number

Examples: P682X8DXPRG101



PDC Duplex Control



Indoor model shown

- Automatically alternates pump operation – equalizing wear and extending pump life
- Plug-in ready wiring for easy and quick installation (indoor model only)
- QuickTree® mounted floats with quick-disconnect at box (indoor model only)
- Green power indicator
- Green pump run indicators
- Audible and visual alarm
- 9 volt back-up for alarm
- Receptacles are angled to accept standard or right-angled plugs
- Programmed automatic 6 hour run limiter protects against run-dry pump conditions
- NEMA 1 indoor or NEMA 4X outdoor options available

Voltage: 115 or 230 depending on system ordered (60 hz.)

PDC MODEL	VOLTS	PHASE	H _z	CORD LENGTH	INDOOR/ OUTDOOR	SYSTEM
PDC-115	115	1	60	10'	Indoor	P682XPRG101
PDCW-115	115	1	60	10'	Outdoor	P682XPRG101W
PDC-230	230	1	60	10'	Indoor	P682XPRG102
PDCW-230	230	1	60	10'	Outdoor	P682XPRG102W

Pro680 duplex systems are shipped complete with the PDC control unit. Floats are pre-set at proper levels in the system. See PDC literature sheet for complete control specifications.

For 25' float cord, add "-2" suffix to model number. Example: PDC-115-2



Liberty Pumps • 7000 Apple Tree Avenue • Bergen, New York 14416
Phone 800-543-2550 Fax (585) 494-1839

WWW.
libertypumps
 .com

Specifications are subject to change without notice. Copyright © Liberty Pumps, Inc. 2017 All rights reserved. LLIT6712-R07/17