




atmosphere is everything

14716 S. Broadway • Gardena, CA 90248 • USA  
TEL: (310) 532-1555 • (800) 421-1266 • FAX: (310) 324-3030  
Web Site: [www.marsair.com](http://www.marsair.com) • E-mail: [info@marsair.com](mailto:info@marsair.com)


|           |             |             |         |          |    |            |  |           |  |
|-----------|-------------|-------------|---------|----------|----|------------|--|-----------|--|
| MODEL NO. | STD2 Series | DRAWING NO. | STD2U-F | DRAWN BY | BH | CHECKED BY |  | FILE NAME |  |
|-----------|-------------|-------------|---------|----------|----|------------|--|-----------|--|

## Unheated Drawing


### STD2 (Standard 2) Series

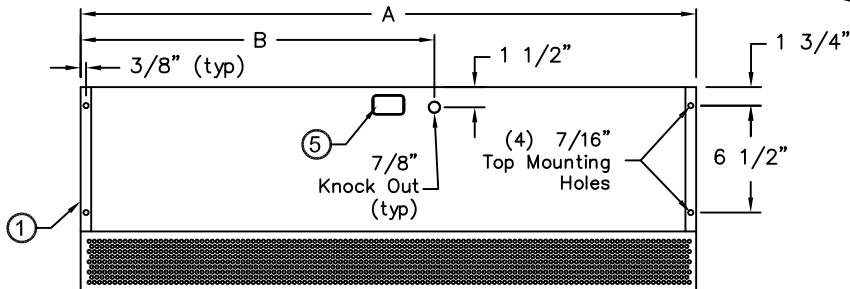



TOP VIEW

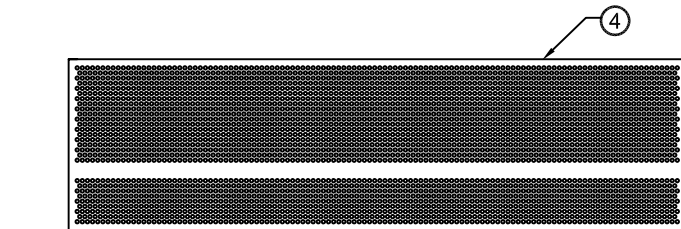

FRONT VIEW

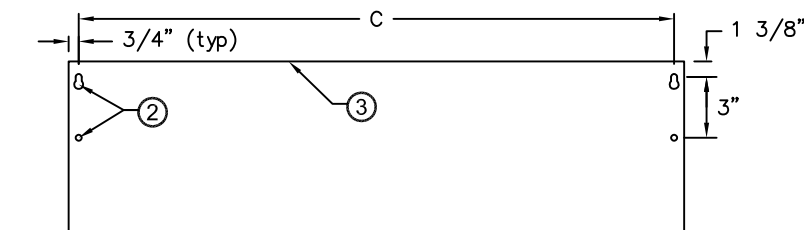

REAR VIEW

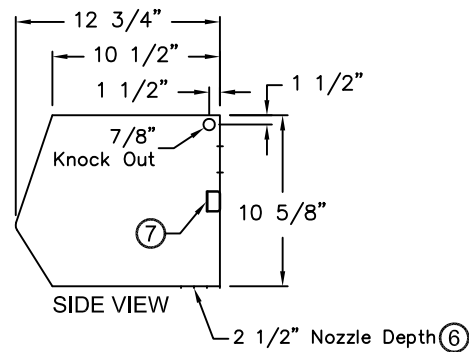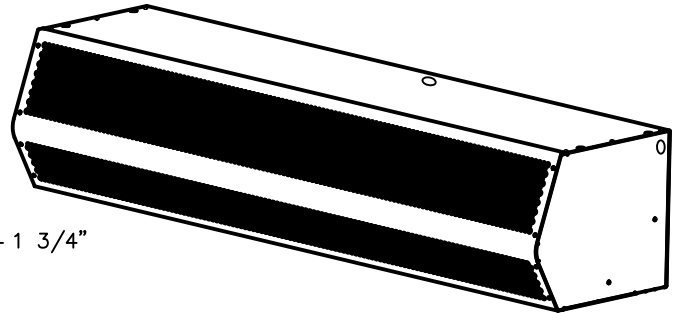

SIDE VIEW



Note: Models STD260-2, STD264-2, STD278-2, STD296-3 & STD2108-2 are not AMCA Certified




#### ⑧ Recommended Accessories



Control Panels



Door Limit Switches



Brackets

\*- Use corresponding letters in "Electrical Data" columns to complete the model numbers.

| MODEL NUMBER   | OVERALL LENGTH<br>A (in) | KNOCKOUT LOCATION<br>B (in) | REAR MOUNTING CENTER<br>C (in) |
|----------------|--------------------------|-----------------------------|--------------------------------|
| STD236-1U*-OB  | 36                       | 25 1/2                      | 34 1/2                         |
| STD242-1U*-OB  | 42                       | 28 1/2                      | 40 1/2                         |
| STD248-1U*-OB  | 48                       | 31 1/2                      | 46 1/2                         |
| STD260-2U*-OB  | 60                       | 37 1/2                      | 58 1/2                         |
| STD272-2U*-OB  | 72                       | 40                          | 70 1/2                         |
| STD284-2U*-OB  | 84                       | 46                          | 82 1/2                         |
| STD296-2U*-OB  | 96                       | 52                          | 94 1/2                         |
| STD2108-3U*-OB | 108                      | 58                          | 106 1/2                        |
| STD2120-3U*-OB | 120                      | 64                          | 118 1/2                        |
| STD2144-3U*-OB | 144                      | 76                          | 142 1/2                        |

#### Notes:

1. This product is designed to meet the National Electric Code (NEC), ETL Listed (UL 507 and CSA 22.2) and AMCA 211 Certified.
2. (2) 1/2" key hole slots and (2) 7/16" mounting holes provided for wall mounting and (4) 7/16" mounting holes for overhead mounting provided, (2) on each end.
3. All units have a self contained one piece cabinet, fire retardant and corrosion proof paint lock metal double protected with baked on Obsidian Black color, rust preventative electrostatic polyurethane powder coating.
4. Cabinet has sufficient strength for fastening to wall on both ends without intermediate support.
5. Internal J-Box(es) for electrical wiring: one motor-(1) 2"x 4"; two motors-(1) 4"x 4"; three motors-(2) 4"x 4".
6. Unit is to be installed such that air flow is unobstructed. Air discharge nozzle containing adjustable air directional vanes with 40° sweep front to back.
7. Circuit protection as per NEC by others.
8. Optional motor control panel, door limit switch and mounting brackets are field installed and/or wired by others. The door limit switch is to be mounted such that the air curtain turns on as door begins to open. To prevent unit damage, the mounting brackets must be installed such that the bottom of the air curtain is not below the door header.

# STD2 (Standard 2) Series

Unheated

Model Lengths 36" – 144"



atmosphere is everything

14716 S. BROADWAY, GARDENA, CA 90248 • Ph: (310)532-1555 Fax: (310)-532-3030 • [www.marsair.com](http://www.marsair.com)  
© Copyright Mars Air Systems, LLC 2014

## Unheated Data Sheet

**Applications: Environmental Separation (up to 10') and Insect Control (up to 8')**

| STD2 (Standard)<br>Series 2 | Mechanical Data       |                |               |                |               |                 | AMCA Certified Lab Data                 |                       |                 |                   |                         |
|-----------------------------|-----------------------|----------------|---------------|----------------|---------------|-----------------|-----------------------------------------|-----------------------|-----------------|-------------------|-------------------------|
| Model Number                | Nozzle Length<br>(in) | Length<br>(in) | Depth<br>(in) | Height<br>(in) | Motor<br>(hp) | Weight<br>(lbs) | Max Core<br>Velocity at<br>Nozzle (fpm) | Avg Velocity<br>(fpm) | Volume<br>(cfm) | Uniformity<br>(%) | Power Rating<br>(watts) |
| STD236-1U*-OB               | 36                    | 36             | 13            | 11             | 1/2           | 60              | 5960                                    | 2206                  | 1379            | 84                | 500                     |
| STD242-1U*-OB               | 42                    | 42             | 13            | 11             | 1/2           | 65              | 4865                                    | 1945                  | 1418            | 87                | 510                     |
| STD248-1U*-OB               | 48                    | 48             | 13            | 11             | 1/2           | 70              | 4247                                    | 1730                  | 1442            | 85                | 550                     |
| STD260-2U*-OB               | 60                    | 60             | 13            | 11             | Two 1/2       | 90              | 6737                                    | 2592                  | 2700            | 93                | 940                     |
| STD272-2U*-OB               | 72                    | 72             | 13            | 11             | Two 1/2       | 120             | 5960                                    | 2206                  | 2758            | 84                | 1000                    |
| STD284-2U*-OB               | 84                    | 84             | 13            | 11             | Two 1/2       | 125             | 4865                                    | 1945                  | 2836            | 87                | 1020                    |
| STD296-2U*-OB               | 96                    | 96             | 13            | 11             | Two 1/2       | 135             | 4247                                    | 1730                  | 2884            | 85                | 1100                    |
| STD2108-3U*-OB              | 108                   | 108            | 13            | 11             | Three 1/2     | 175             | 5960                                    | 2206                  | 4137            | 84                | 1500                    |
| STD2120-3U*-OB              | 120                   | 120            | 13            | 11             | Three 1/2     | 185             | 4660                                    | 2084                  | 4341            | 92                | 1570                    |
| STD2144-3U*-OB              | 144                   | 144            | 13            | 11             | Three 1/2     | 200             | 4247                                    | 1730                  | 4326            | 85                | 1650                    |

\* - Use corresponding letters in "Electrical Data" columns to complete the model numbers.

Note: Data above for 1725 RPM at 60 Hz, 50 Hz is 1425 RPM with a 17% reduction in the performance data.

1. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.
2. Rated data shown are only for base (unheated) units, as shown.

### Features:

- ❖ 1/2 HP Continuous Duty TEAO Motors
- ❖ Sleek self-contained one piece heavy gauge corrosion proof paint lock metal design
- ❖ ETL Certified to conform to UL 507 (US) and CSA 22.2 (Canada) Standards
- ❖ AMCA Certified to AMCA 211 (see table above for models available)
- ❖ (4) 7/16" top and wall mounting holes provided, (2) on each end
- ❖ Cabinet has sufficient strength for fastening to wall on both ends without intermediate support
- ❖ Adjustable air directional vanes with 40° sweep front to back
- ❖ Standard color is Obsidian Black
- ❖ Rust preventative electrostatic polyurethane powder coating
- ❖ 5 year parts warranty
- ❖ Freight Included (FOB Continental USA)
- ❖ Proudly Made in the USA

### Options and Accessories: (see Accessories Brochure)

- ❖ Motor Control Panels
- ❖ Wall and Overhead Bracket
- ❖ Multi-speed motors and controls
- ❖ Washdown units and accessories (NEMA 4 & 4X)
- ❖ Explosion Resistant units and accessories (Class I, Div. I, Group D)
- ❖ Custom colors and finishes (304SS, 316SS)

### Sound Levels: (measured at 10' in an open field)

1 Motor Unit = 66 dBA, 2 Motor Unit = 68 dBA, 3 Motor Unit = 71 dBA & 4 Motor Unit = 73 dBA

| Projection Velocity |                              |                             |
|---------------------|------------------------------|-----------------------------|
| Model               | Distance from<br>nozzle (in) | Avg. Core<br>Velocity (FPM) |
| STD236-1U*-OB       | 36"                          | 1522                        |
|                     | 48"                          | 1312                        |
|                     | 60"                          | 1158                        |



MARS Air Systems, LLC certifies that the Air Curtains shown on this data sheet are licensed to bear the AMCA seal. The rating shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program.

Note: Models STD260-2, STD264-2, STD278-2, STD296-3 & STD2108-2 are not AMCA Certified.


| Electrical Data<br>(FLA) | Unit Voltage<br>(Voltage Code) |                    |                |                    |                |                |                     |
|--------------------------|--------------------------------|--------------------|----------------|--------------------|----------------|----------------|---------------------|
|                          | Single Phase                   |                    |                | Three Phase        |                |                |                     |
|                          | 115v/1Ø<br>(A)                 | 208/230v/1Ø<br>(D) | 277v/1Ø<br>(L) | 208/230v/3Ø<br>(G) | 460v/3Ø<br>(H) | 575v/3Ø<br>(I) | 380v/3Ø/50Hz<br>(W) |
| STD236-1U*-OB            | 5.1                            | 2.5                | 2.7            | 1.8/1.6            | 0.8            | 0.7            | 1.8                 |
| STD242-1U*-OB            | 5.1                            | 2.5                | 2.7            | 1.8/1.6            | 0.8            | 0.7            | 1.8                 |
| STD248-1U*-OB            | 5.1                            | 2.5                | 2.7            | 1.8/1.6            | 0.8            | 0.7            | 1.8                 |
| STD260-2U*-OB            | 10.2                           | 5.0                | 5.4            | 3.6/3.2            | 1.6            | 1.4            | 3.6                 |
| STD272-2U*-OB            | 10.2                           | 5.0                | 5.4            | 3.6/3.2            | 1.6            | 1.4            | 3.6                 |
| STD284-2U*-OB            | 10.2                           | 5.0                | 5.4            | 3.6/3.2            | 1.6            | 1.4            | 3.6                 |
| STD296-2U*-OB            | 10.2                           | 5.0                | 5.4            | 3.6/3.2            | 1.6            | 1.4            | 3.6                 |
| STD2108-3U*-OB           | 15.3                           | 7.5                | 8.1            | 5.4/4.8            | 2.4            | 2.1            | 5.4                 |
| STD2120-3U*-OB           | 15.3                           | 7.5                | 8.1            | 5.4/4.8            | 2.4            | 2.1            | 5.4                 |
| STD2144-3U*-OB           | 15.3                           | 7.5                | 8.1            | 5.4/4.8            | 2.4            | 2.1            | 5.4                 |

\* - Use corresponding letters in "Electrical Data" columns to complete the model numbers.

Note: For Ampacity Multiply FLA X 1.25

### EXAMPLE

**STD2 72 - 2 U H - OB**

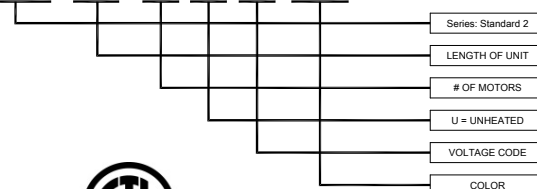

NOTE: MARS AIR SYSTEMS, LLC reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

STD2U-B; August 09, 2016