


## F-607-RWS - Gate Valve - Ductile Iron, Fire Protection, Resilient Wedge

The resilient wedge, ductile iron gate valve features Class 125 flanged, flat face end connections for easy installation and accessibility. Outside screw and yoke (OS&Y) gate valves are recommended when positive shutoff and a quick visual indicator open/closed position is required. This valve features a pre-grooved stem for tamper switch mounting and is drilled, tapped, and plugged at location "A" for bypass. It is listed by Underwriters Laboratories of the US and Canada (UL/ULC) and FM **+ n**

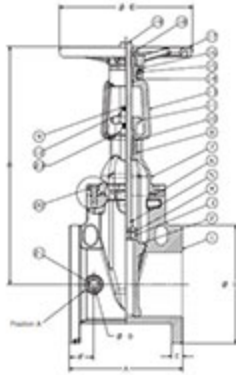

Material Number	UPC Code	Valve Size	Connection Type	Description	Turns/Operati
<a href="#">NS2920XE</a>	039923366146	2 1/2	F -- Flanged	F-607-RWS 2 1/2 FL RWSS STM ULFMGT DI300	Multi-Turn
<a href="#">NS2920XF</a>	039923366153	3	F -- Flanged	F-607-RWS 3 FL OSYRW SSSTM ULFMGT DI300	Multi-Turn
<a href="#">NS2920H</a>	039923366160	4	F -- Flanged	F-607-RWS 4 FL OSYRW SSSTM ULFMGT DI300	Multi-Turn
<a href="#">NS2920K</a>	039923366177	6	F -- Flanged	F-607-RWS 6 FL OSYRW SSSTM ULFMGT DI300	Multi-Turn
<a href="#">NS2920L</a>	039923366184	8	F -- Flanged	F-607-RWS 8 FL OSYRW SSSTM ULFMGT DI300	Multi-Turn
<a href="#">NS2920M</a>	039923366191	10	F -- Flanged	F-607-RWS 10 F OSYRW SSSTM ULFMGT DI300	Multi-Turn
<a href="#">NS2920N</a>	039923366207	12	F -- Flanged	F-607-RWS 12 F OSYRW SSSTM ULFMGT DI300	Multi-Turn

Material Number	UPC Code	Valve Size	Connection Type	Description	Turns/Operati
<u>NS2920T</u>	039923392800	14	F -- Flanged	F-607-RWS 14 FOSY RW SS STM ULFM GT	Multi-Turn
<u>NS2920XU</u>	039923392817	16	F -- Flanged	F-607-RWS 16 FOSY RW SS STM ULFM GT	Multi-Turn

