

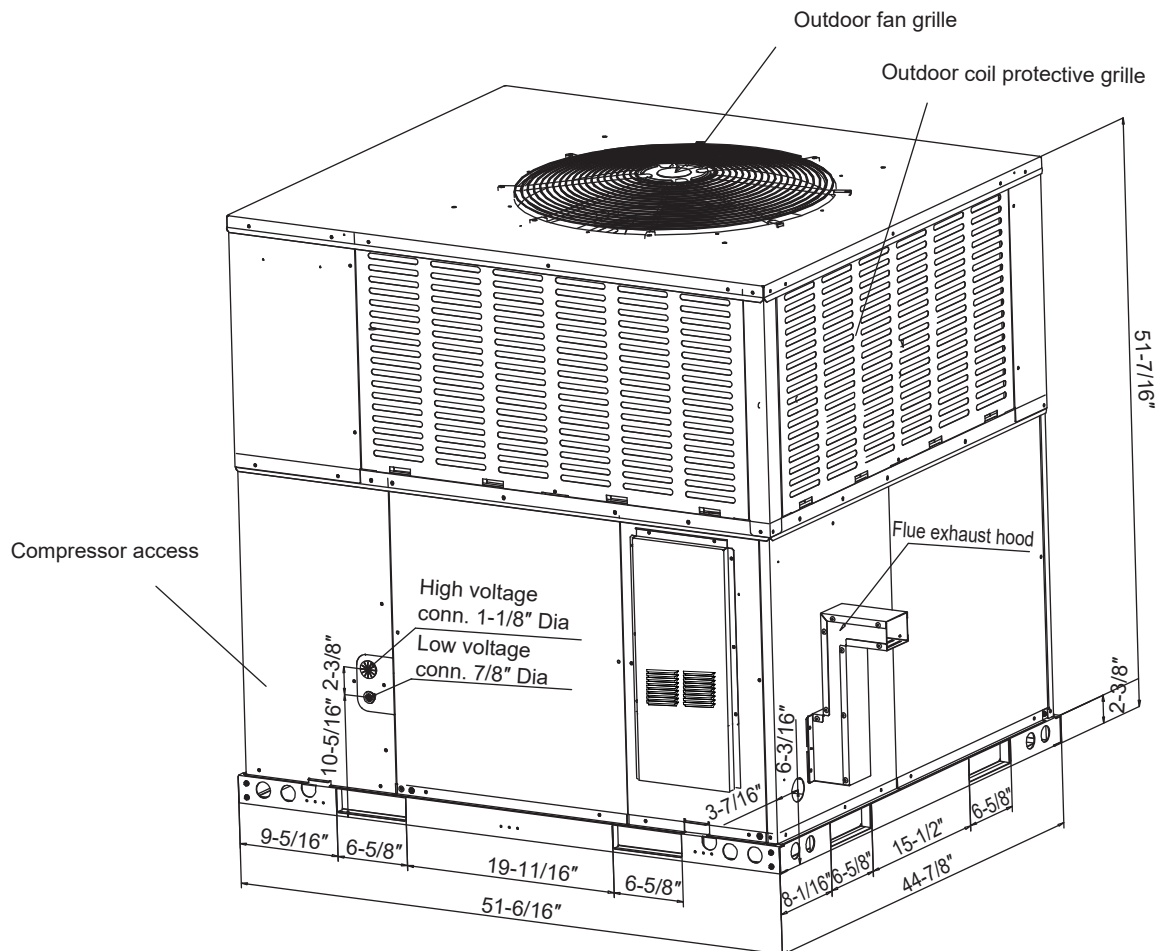


TAG: _____

SUBMITTAL

4.0 Ton High-Efficiency Gas Package Unit J4PG4048B1090AA

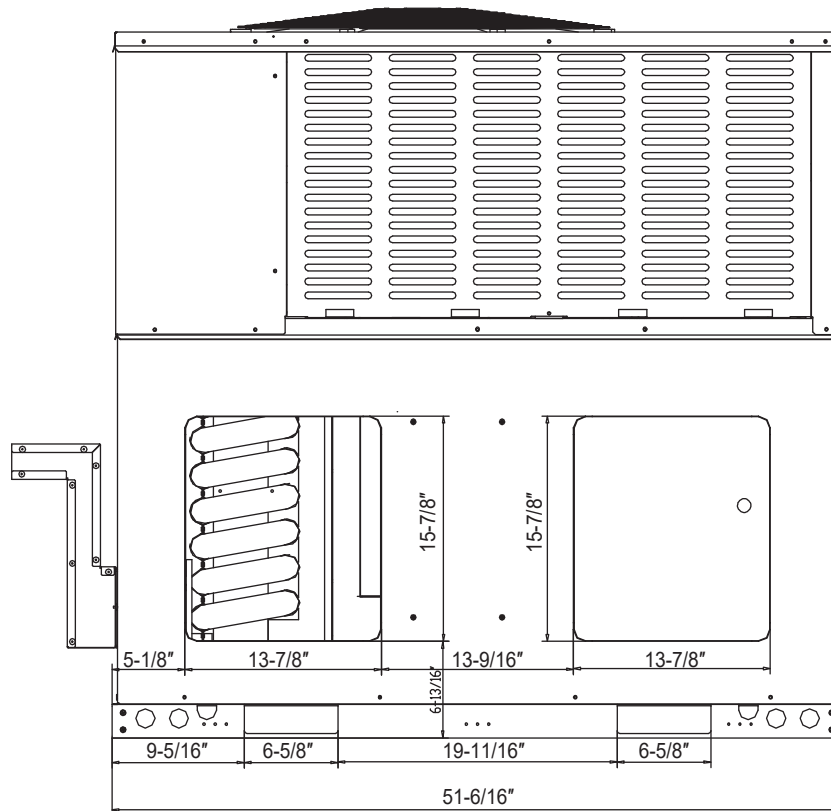

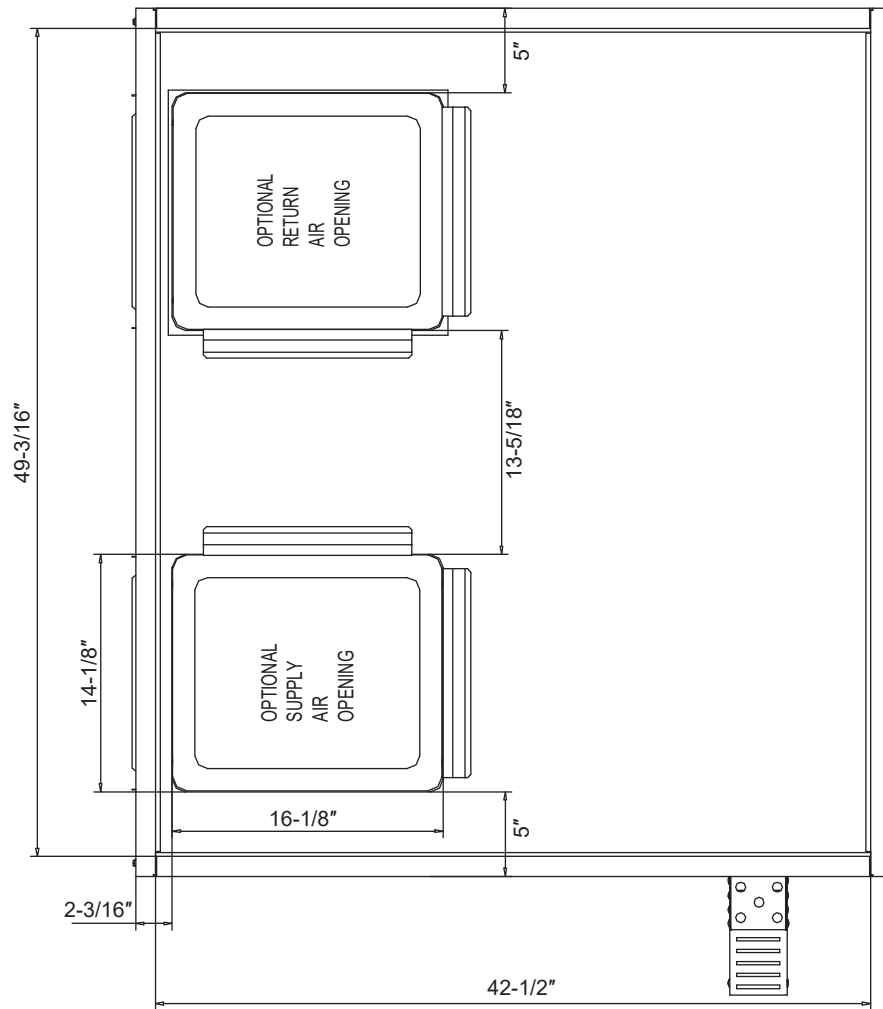

Dimensions Back and Bottom

Specifications

EVAPORATOR FAN	
DRIVE- NO. SPEEDS	DIRECT - 5
CFM VS. IN. WG.	See Fan Performance Table
MOTOR HP	3/4
MOTOR SPEED R.P.M.	1050
VOLTS/PH/HZ	208/230/1/60
F.L. AMPS	5.16
EVAPORATOR COIL	
ROWS- F.P.I.	4 - 17
FACE AREA (SQ. FT.)	6.1
TUBE SIZE (IN.)	9/32
REFRIGERANT CONTROL	ORIFICE
REFRIGERANT	
LBS. - R-410	7 LBS. - 15 OZ.
DIMENSIONS	
CRATED (IN.)	51-9/16X51-7/16X44-13/16
WEIGHT	
SHIPPING (LBS.)	631.4
NET (LBS.)	591.8

[illegible]

Features

- Single-stage gas (LP conversion kit provided with each unit) heating.
- Bottom or side air return.
- Aluminized steel tubular heat exchanger.
- Quiet multi-speed circulation blower.
- Direct spark ignition.
- AHRI certified and ETL listed.
- Suitable for Manufactured/Mobile Home Use.



The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

BX-PRQ-J4PG4048B1090A-1A