

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

PLSL-** WA Stainless Steel Flexible Braided Washing Machine Water Connector - FHT Inlet x FHT Outlet

Use: For use only in potable water distribution systems in accessible locations only.

Part Listing:



- | | | |
|--------------------------|---------------|--|
| ☐ | PLSL12-48WA F | 3/4" FHT x 3/4" FHT x 48" length, flag label |
| ☐ | PLSL12-48WA P | 3/4" FHT x 3/4" FHT x 48" length, bagged |
| ☐ | PLSL12-60WA F | 3/4" FHT x 3/4" FHT x 60" length, flag label |
| ☐ | PLSL12-60WA P | 3/4" FHT x 3/4" FHT x 60" length, bagged |
| ☐ | PLSL12-72WA F | 3/4" FHT x 3/4" FHT x 72" length, flag label |
| ☐ | PLSL12-72WA P | 3/4" FHT x 3/4" FHT x 72" length, bagged |

Operating Specifications

Temperature	Pressure	Tubing Diameter
40°- 140° F, Intermittent to 180° F	125 PSI maximum	0.300" ID(0.510"OD)

MATERIAL SPECIFICATIONS

Inner Hose	Reinforced PVC
Braiding	Stainless steel wire
Barb	Brass
Ferrule	Stainless steel
Nut	Brass
Washer	Rubber

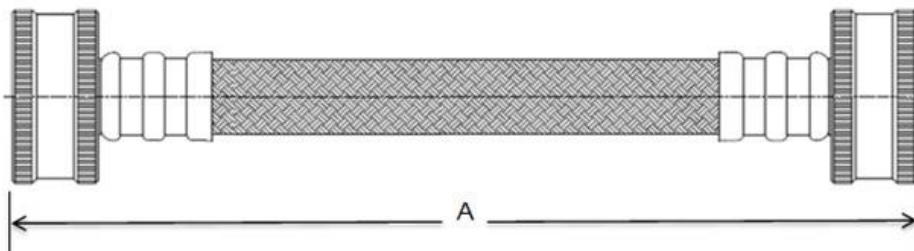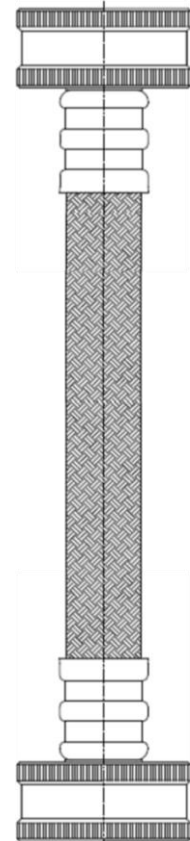

PART DIMENSIONS (Inches)

Model	DIM. A
PLSL12-48	48.0/49.0
PLSL12-60	60.0/61.0
PLSL12-72	72.0/73.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6 (file # 5311)
- IAPMO listed to NSF 372 for Low-Lead Compliance (file #6624)
- IAPMO listed to NSF 61/9 (file #N-6632)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Co., and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.193 PLSL_WA SS Washing Maching Water Connector FHT x FHT Rev. 03/17

PLUMBSHOP®

© 2017 Brasscraft Mfg. Co.