NOTES: UNLESS OTHERWISE SPECIFIED

1. PERFORMANCE REQUIREMENTS AND TEST PROCEDURES PER FLUIDMASTER SPECIFICATION NO. 3ENG-5108.
2. PARTS MUST BE CLEAN AND FREE OF OIL, GREASE, DIRT, AND LOOSE PARTICLES.
3. REFILL: 28% ±5% (IR)

△4 CAP COLOR: RED PER CAC-204

△5 SHANK ASSEMBLY, STANDARD, 15/16-14 UNS-1A WITHOUT REGULATOR.

6. MUST USE FLUIDMASTER PART NUMBER: B5-1271, (SHANK LOCKNUT), AND FLUIDMASTER PART NUMBER: B433, (SHANK WASHER), IN CONJUNCTION WITH THE SHANK ASSEMBLY USED WITH THIS VALVE MODEL.

ITEM	QTY	PART NO.	DESCRIPTION
1	1	4-1532	TOP AND CAP - ASSY.
2	1	4-809	BODY/INLET TUBE - ASSY
3	1	5-1124	CUP ASSEMBLY
4	1	5-1122	SCREW, ADJUSTMENT
5	1	4-115	SLEEVE
6	1	4-807	SHANK ASSEMBLY
7	1	4-654	RESTRICTOR, SHANK



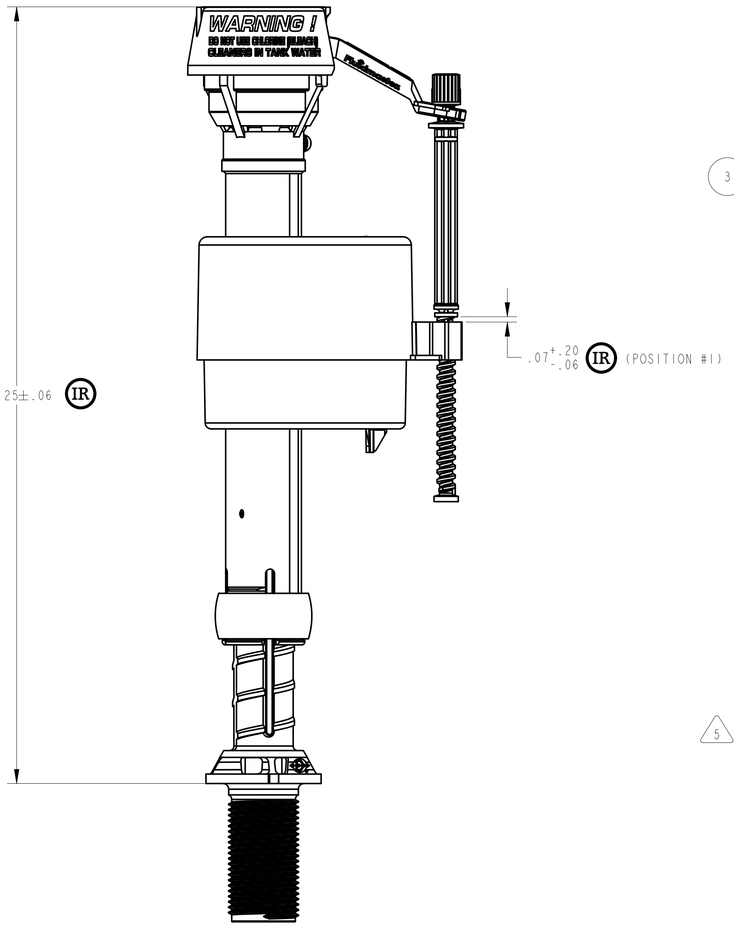

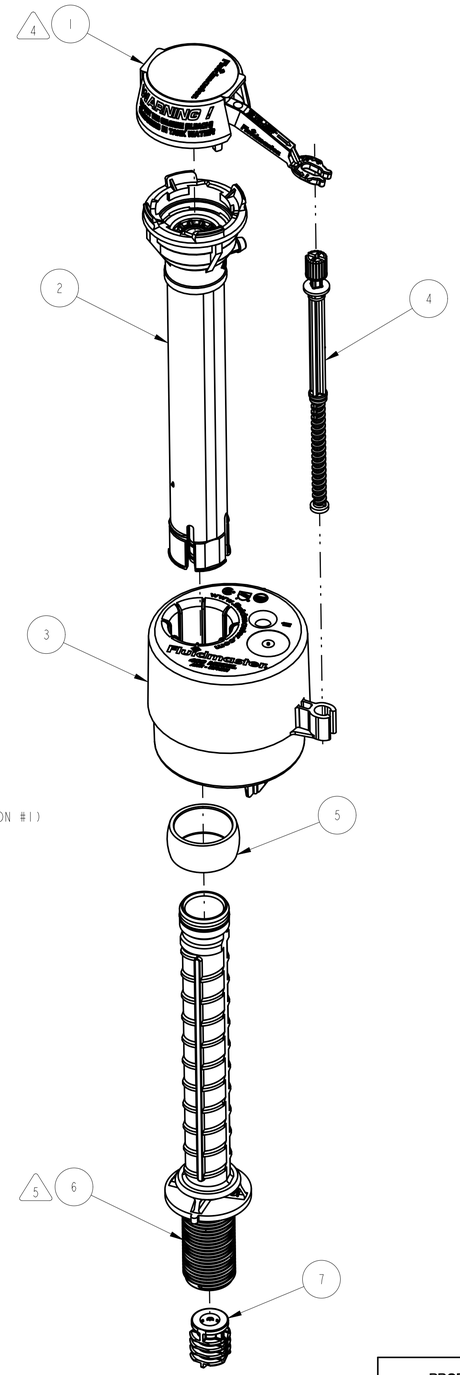

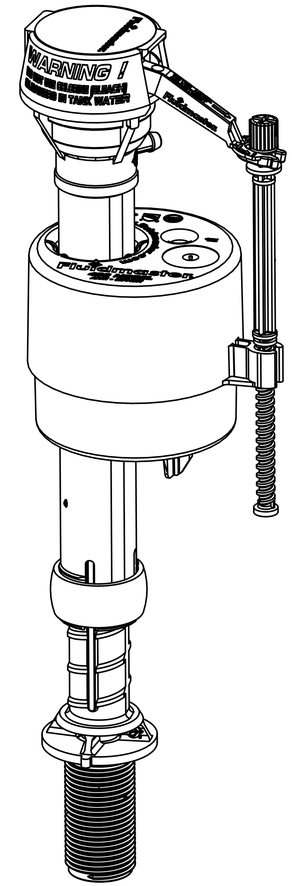

PROPRIETARY NOTICE
ALL INFORMATION CONTAINED IN OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED THE PROPERTY OF, AND PROPRIETARY TO, FLUIDMASTER, INC. ALL DESIGNS, USES, REPRODUCTIONS, AND RIGHTS RELATING TO THIS INFORMATION ARE EXPRESSLY RESERVED. COMMUNICATION OF THIS INFORMATION TO OTHERS IS STRICTLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT.

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES
INTERPRET DIM AND TOL PER ASME Y14.5M
DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION

REV	DESCRIPTION	DATE
2	SEE E.O. # 4-1577-2	24-Jun-10

REVISIONS

DOCUMENT IS CURRENTLY AT A STATE OF: Released

MATERIAL: SEE DETAIL DRAWINGS
COLOR:

REV Created By: Reese Kelly 24-Jun-10
Last Updated By: Reese Kelly 24-Jun-10

TOLERANCES ARE:
DECIMALS .X ±.03 .XX ±.01 .XXX ±.005
ANGLES ± 1° FRACTIONS ± 1/8

TITLE: VALVE, FILL
(MODEL 400)

Fluidmaster Inc.
SAN JUAN CAPISTRANO, CALIFORNIA.
(949) 728-2000 www.fluidmaster.com

WEIGHT (g) 177.2
VOLUME (cm^3) 148.0

SIZE	DWG NO.	REV
D	4-1577	2

1/1 SHEET 1 OF 1 ITERATION: 2