

Job Name : _____
Purchaser : _____
Engineer : _____
Submitted To : _____
Submitted By : _____
Unit Designation : Schedule No.: _____

Location : _____
P.O. No. : _____
Architect : _____
Date : _____
For : ☐ Reference ☐ Approval ☐ Construction
Model No.: _____


Submittal Data : PTAC & PTHP - 230/208V (R-410A)




Standard Features :

- Limited Five Year Parts and Labor Warranty on Sealed Refrigerant System
- Limited One Year Full System Warranty on Parts and Labor, 2-5 Year Parts
- R-410A Refrigerant
- Ultra Quiet Operation
- High Energy Efficiency
- Digital Control Display
- Gold Fin™ Anti-corrosion Treatment for Condenser
- Auto Restart
- Energy Saver Mode
- Front Desk Control
- Freeze Room Protection
- Dip Switch setting for temperature limiting
- Temperature Display on unit
- Fresh Air Ventilation, 70 CFM @ 0.3 ESP with Open Damper Door
- Power Cord Length 6.3 ft
- **Unit Dimension (inches, W x H x D) : 42 x 16 x 19 7/8**

Front Grille Assembly



Unit

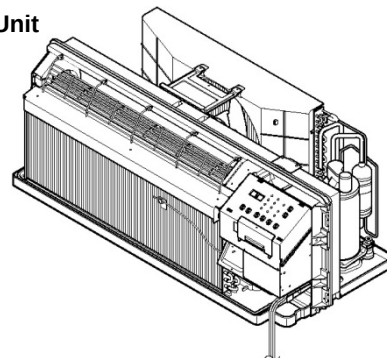

Unit Specification :

Model No.	Cooling Capacity (Btu/h)	EER	Heating Capacity (Btu/h)	COP	Electric Heater (kW)	Power Supply (V, Hz, Ph)	Air Circulation (CFM, High)	Dehumidification (pts/hr)	Running Current (Amps)		Power Input (Watts)		Minimum Circuit Amps (A)	Maximum Overcurrent Protection (A)	Weight Net/Gross (lbs)	dBA Level (Indoor/Outdoor)
									Cooling	Heating	Cooling	Heating				
LP073CD2A	7,400/7,200	11.6	-	-	2.5/2.4	230/208,60,1	300	1.6	2.9/3.0	-	635/620	-	14.6	15	93.0	45/61
LP073CD3A	7,400/7,200	11.6	-	-	3.5/3.1	230/208,60,1	300	2.0	2.9/3.0	-	635/620	-	19.2	20	93.0	45/61
LP093CD3A	9,000/8,800	11.0	-	-	3.5/3.1	230/208,60,1	255	2.3	3.8/4.2	-	820/800	-	19.2	20	101.6	46/61
LP123CD3A	11,800/11,600	10.6	-	-	3.5/3.1	230/208,60,1	255	2.8	4.9/5.4	-	1,113/1,094	-	19.3	20	101.6	50/63
LP153CD3A	14,300/14,100	9.2	-	-	3.5/3.1	230/208,60,1	388	3.9	6.9/7.6	-	1,554/1,532	-	19.3	20	105.8	50/63
LP153CD5A	14,300/14,100	9.2	-	-	5.0/4.6	230/208,60,1	388	4.4	6.9/7.6	-	1,550/1,530	-	26.3	30	105.8	50/63
LP073HD2A	7,400/7,200	11.6	6,400/6,200	3.2	2.5/2.4	230/208,60,1	300	1.6	2.9/3.0	2.6/2.7	638/621	586/567	14.6	15	95.7	45/61
LP073HD3A	7,400/7,200	11.6	6,400/6,200	3.2	3.5/3.1	230/208,60,1	300	2.0	2.9/3.0	2.6/2.7	635/620	585/565	19.2	20	95.7	45/61
LP093HD3A	9,000/8,800	11.0	8,100/7,900	3.2	3.5/3.1	230/208,60,1	255	2.3	3.8/4.2	3.6/4.0	820/800	741/723	19.2	20	105.2	46/61
LP123HD3A	11,800/11,600	10.6	10,800/10,600	3.2	3.5/3.1	230/208,60,1	388	2.9	4.9/5.4	4.4/4.8	1,115/1,095	990/970	19.3	20	105.2	50/63
LP153HD3A	14,700/14,500	9.4	12,100/11,900	2.6	3.5/3.1	230/208,60,1	388	4.1	6.9/7.6	6.0/6.6	1,560/1,540	1,360/1,340	19.3	20	113.8	50/63
LP153HD5A	14,700/14,500	9.4	12,100/11,900	2.6	5.0/4.6	230/208,60,1	388	4.6	6.9/7.6	6.0/6.6	1,560/1,540	1,360/1,340	26.3	30	113.8	50/65

Accessories :

Wall Sleeve (42"Wx16"Hx13 3/4"D)	AYSVB01A	Built-in Control Cover Kit(10 pack)	AYRE110
Stamped Aluminum Grille	AYRGALA01	Wall Thermostat Connection Kit	AYWH101
Architecture Grille - Aluminum	AYAGALA01A	EMS/Front Desk Control Connection Kit	AYFD101
Architecture Grille - Dark Bronze	AYAGALB01A	Condensate Drain Kit	AYDR101
Architecture Grille - Soft Dove	AYAGALC01A	Hard Wire Kit	AYHW101
Sub Base (230/208V 20A)	AYSB1101A	Replacement Filter (10 pack)	AYFT110
Sub Base (230/208V 30A)	AYSB2101A	Control Panel Key Lock	AYCP101
Leveling Legs	AYLL101	Condensate Disposal Kit (230/208V)	AYCD2101
Lateral Duct Kit	AYLD1A	Fuse Holder Kit (230/208V 30A)	AYFH1401

Wall Thermostats :

Wired Wall Thermostat	PYRCUA0A
Wireless Wall Thermostat	PYRUCC0A
Current Tap (for Wireless Wall Thermostat)	PYRUCC1A
Adapter Kit for Wireless Thermostat (for GE)	PYADTGE1A
Adapter Kit for Wireless Thermostat (for Amana)	PYADTAM1A

Note :