

Job Name/Location:

Tag #:

Date:

For: ☐ File ☐ Resubmit

PO No.:

☐ Approval ☐ Other _____

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)



Packaged Terminal Air Conditioners (PTAC) Heat Pump Models



Model	Cooling Capacity (Btu/h)	EER ¹	Heating Capacity (Btu/h)	COP ²	Net Weight (lbs)	Shipping Weight (lbs)	Sound Pressure IDU ³ /ODU ⁴ (dBA)	Air Circulation H/L (CFM)	Dehumidification (pts/hr)	Power Supply (V/Hz/Ph)	Electric Heater (kW)	MOP ⁵ (A)	MCA ⁶ (A)	Cooling Rated Amps (A)	Heating Rated Amps (A)	Cooling Power Input (W)	Heating Power Input (W)
LP073HD2A	7,200/7,400	11.6	6,200/6,400	3.2	95.7	108.0	45/61	247/212	1.6	208-230/60/1	2.4/2.5	15	14.6	3.0/2.9	2.7/2.6	621/638	567/586
LP073HD3A	7,200/7,400	11.6	6,200/6,400	3.2	95.7	108.0	45/61	247/212	2.0	208-230/60/1	3.1/3.5	20	19.2	3.0/2.9	2.7/2.6	620/635	565/585
LP093HD3A	8,800/9,000	11.0	7,900/8,100	3.2	105.2	117.5	46/61	247/212	2.3	208-230/60/1	3.1/3.5	20	19.2	4.2/3.8	4.0/3.6	800/820	723/741
LP123HD3A	11,600/11,800	10.6	10,600/10,800	3.2	105.2	117.5	50/63	353/318	2.9	208-230/60/1	3.1/3.5	20	19.3	5.4/4.9	4.8/4.4	1,095/1,115	970/990
LP153HD3A	14,500/14,700	9.4	11,900/12,100	2.6	113.8	126.1	51/64	388/353	4.1	208-230/60/1	3.1/3.5	20	19.3	7.6/6.9	6.6/6.0	1,540/1,560	1,340/1,360
LP153HD5A	14,500/14,700	9.4	11,900/12,100	2.6	113.8	126.1	51/64	388/353	4.6	208-230/60/1	4.6/5.0	30	26.3	7.6/6.9	6.6/6.0	1,540/1,560	1,340/1,360

1: EER - Energy Efficiency Ratio

4: ODU - Outdoor Unit

2: COP - Coefficient of Performance

5: MOP - Maximum Overcurrent Protection

3: IDU - Indoor Unit

6: MCA - Minimum Circuit Ampacity

Standard Features:

- Limited Warranty with LG Certified Installation
 - Limited Five Year Parts and Labor Warranty on sealed refrigerant system
 - Limited One Year Full System Warranty on Parts and Labor, 2-5 Year Parts
- 6.3 ft power cord
- Auto restart
- Digital control display
- Dip switch setting for temperature limiting
- Energy saver mode
- Freeze room protection
- Fresh air ventilation (70 CFM @ 0.3 external static pressure (ESP) with open damper door)
- Front desk control
- GoldFin™ anti-corrosion treatment for condenser
- High energy efficiency
- Temperature display on unit
- Ultra-quiet operation

Optional Accessories:

- | | |
|--|--|
| ☐ Wall Sleeve - 42"W x 16"H x 13-3/4"D (AYSVB01A) | ☐ Built-in Control Cover Kit 10 Pack (AYRE110) |
| ☐ Stamped Aluminum Grille (AYRGALA01) | ☐ Wall Thermostat Connection Kit (AYWH101) |
| ☐ Architecture Grille - Aluminum (AYAGALA01A) | ☐ EMS/Front Desk Control Connection Kit (AYFD101) |
| ☐ Architecture Grille - Dark Bronze (AYAGALB01A) | ☐ Condensate Drain Kit (AYDR101) |
| ☐ Architecture Grille - Soft Dove (AYAGALC01A) | ☐ Hard Wire Kit (AYHW101) |
| ☐ Sub Base 208-230V 20A (AYSB1101A) | ☐ Replacement Filter 10 Pack (AYFT110) |
| ☐ Sub Base 208-230V 30A (AYSB2101A) | ☐ Control Panel Key Lock (AYCO101) |
| ☐ Lateral Duct Kit (AYLD1A) | ☐ Fuse Holder Kit 208-230V 30A (AYFH1401) |

Optional Wall Thermostats

- ☐ Wired Wall Thermostat (PYRCUCA0A)
- ☐ Wireless Wall Thermostat (PYRUCC0A)
- ☐ Current Tap for Wireless Thermostat (PYRUCC1A)
- ☐ Adapter Kit for Wireless Thermostat for GE (PYADTGE1A)
- ☐ Adapter Kit for Wireless Thermostat for Amana (PYADTAM1A)

Job Name/Location:


Packaged Terminal Air Conditioners (PTAC)
Heat Pump Models



Tag #:

Date:

PO No.:

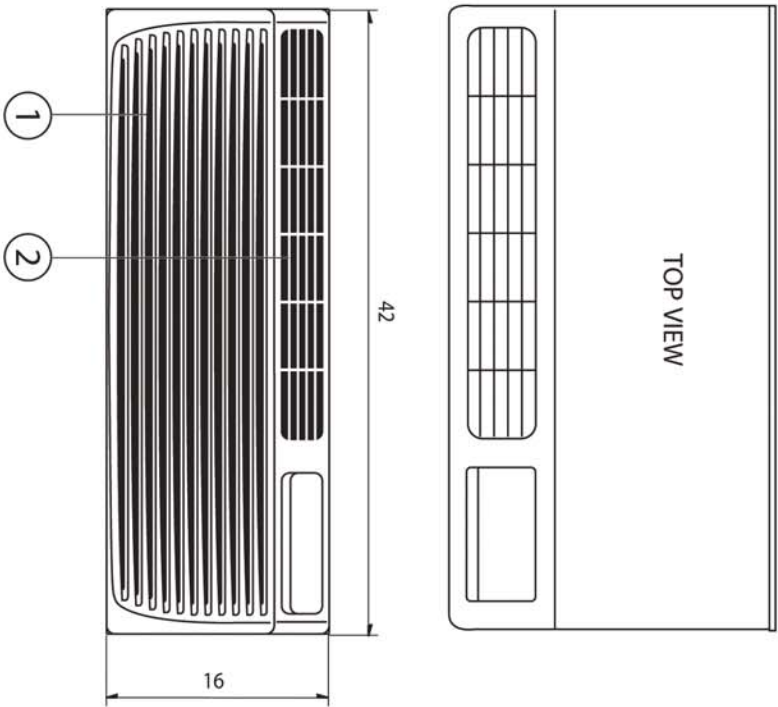

Unit: inch

Item No.	Part name	Remarks
1	Inlet Grille	
2	Vertical Air Deflector	
3	Architectural Grille	