Enjoy The Value Of An Amazingly Affordable

ENDLESS SUPPLY OF HOT WATER.



VALUE SERIES TANKLESS WATER HEATERS



Our performance is proven.

OUR PROMISES ARE KEPT

Nearly 100 years ago, we at Rinnai established a tradition of never settling for less than the absolute best—a tradition that has grown even stronger today.

Thanks to superior design and engineering, Rinnai residential and commercial water heating and home heating solutions continually raise the standard in comfort, convenience and reliability. In fact, our commitment to building in quality at every level has made Rinnai Tankless Water Heaters the #1 selling tankless water heating brand in the U.S. and Canada.

Beyond manufacturing the highest quality tankless water heaters and home heating products, our people stand behind all that we make, before, during and long after installation. From 24/7/365 technical support for professionals, to our national network of independent installers, to on-staff engineers who can assist with choosing the right products and sizes – we're inspiring confidence right along with the comfort our solutions provide.

From products to service and everything in between, our dedication to delivering our absolute best never wavers.









enhancing the comforts of home.

With Rinnai Tankless Water Heaters, homeowners can now have more hot water than they ever thought possible.

The innovation behind Rinnai Tankless Water Heaters provides an endless supply of hot water wherever and whenever it's needed—even for multiple tasks at the same time.

Because they operate on an as-needed basis, Rinnai Tankless Water Heaters can use up to 40 percent* less energy than traditional systems, which helps reduce utility costs and can contribute to a favorable HERS rating and optimize LEED certification. On top of efficiency, our tankless water heaters feature a copper heat exchanger for unparalleled quality, durability and safety. And their compact design offers substantial space savings in the home.

The flexibility and convenience of an endless supply of hot water. The reliability of proven engineering. It's everything homeowners need to feel comfortable.

*As based on the average cost to run an electric tank water heater per the DOE Average Energy Costs (www.doe.gov).

Rinnai Tankless Solutions Give You



Rinnai Tankless Water Heaters deliver trusted quality and proven reliability you can count on. From efficient, durable products to experienced support, there is simply no better choice than Rinnai.

- Wide range of quality product offerings
- Easy, safe ventilation options
- 24/7 technical support for professionals



RINNAI NON-CONDENSING VALUE SERIES... CONFIDENCE-BOOSTING RELIABILITY AT AN INVITING PRICE.

The ability to help homeowners make life-enhancing upgrades is what Rinnai's Value Series Tankless Water Heaters are all about. Featuring non-condensing technology that harnesses a copper heat exchanger to optimize heat transfer, these dependable models are an affordable solution for those excited to make the jump from tank to tankless.

Living up to our promise on multiple levels, these models offer the energy efficiency sought after for sustainable living and energy savings while delivering lasting comfort at a price that's budget-friendly to the core. Their performance and hot water supply make them ideal for medium- to smaller-sized new homes or remodels, and an easy-to-install compact design completes the perfect fit.

Rinnai defined Value so you wouldn't have to compromise on quality.

THE POWER TO LIVE BETTER.

Tankless technology that saves you time.

Never think about your hot water needs again: Innovative technology provides an endless supply of hot water whenever and wherever it's needed – even for simultaneous uses at multiple fixtures. Showers and baths? Absolutely. Laundry and dishes? No problem. Prioritizing activities and scheduling hot water use is a thing of the past.

Save money, splurge on performance.

Designed for efficiency: Rinnai's tankless technology features copper heat exchangers to provide maximum efficiency and uses up to 40 percent less energy* than a traditional tank.

Save energy: By operating only when hot water is needed, and no storage tank to heat and reheat water, our tankless technology helps save on energy and utility costs. The use of an electronic ignition means no standing pilot light that constantly uses energy.

A smart investment: Increase your home's value with premium technology, increased energy efficiency, an improved Home Energy Rating System (HERS) Index Score and optimized LEED certification. Available energy efficiency rebates and tax credits offer the opportunity to help make your purchases more affordable.

Multiple sizes: Rinnai gives you options to right-size your installation and customize your efficiency.

Replace parts, not systems: Every part of a Rinnai Tankless Water Heater is replaceable. Components can be easily exchanged, if needed, versus replacing the entire system.

Save space with a compact design.

Maximum output, minimum space: About the size of a small suitcase at 18.5" x 26" x 10" or smaller, these wall-mounted models can be installed on interior or exterior walls and in compact spaces to free up valuable space.

Flexible installation: Small size allows for installation in non-traditional spaces such as crawl spaces and attics, making it perfect for use in any size home, including manufactured and modular homes.

Stay green with a sustainable choice.

Earth-friendly efficiency: Our tankless technology achieves maximum energy efficiency, helping to conserve natural resources.

Less waste: Compact heat exchanger design, longer product lifespan up to twice as long as a traditional tank** and recyclable parts means less waste in landfills.

High standards for low emissions: Lower CO₂ emissions contribute to cleaner air and a healthier environment.



NON-CONDENSING TECHNOLOGY

Value Series

CONFIDENCE MEETS AFFORDABILITY.

The Value Series is the perfect combination of comfort and value. These easy-to-install, compact models combine all the reliability you'd expect from Rinnai with performance that's ideal for medium- to smaller-sized new homes or remodels.

UNIQUE FEATURES OF VALUE SERIES

- Energy Factor of up to .82
- Available in three sizes: 120,000, 150,000, and 180,000 BTU
- A practical alternative water heating choice for homes with smaller demands



^{*} As based on the average cost to run an electric tank water heater per the DOE Average Energy Costs (www.doe.gov).

^{**} Based on DOE ENERGY STAR® lifecycle estimates.

FLEXIBLE TANKLESS INSTALLATION OPTIONS

Optimized Concentric Venting for Non-Condensing Tankless Water Heaters

Rinnai Tankless Water Heaters were the first to use a unique Concentric Venting System, a single-vent assembly option featuring an inner tube for exhaust and an outer tube for fresh air from outdoors. The result is a direct-vent, sealed combustion system that offers optimum safety and performance.

Beyond performance, our concentric system option can make installation faster and easier with:

- Single penetration through the wall reducing install time and costs
- Simple positive-fit components for secure connection
- · Joint seals that expand and contract with weather to prevent damage
- · Ease of assembly, adjustment and disassembly

Rinnai Makes Your 1/2" Gas Line an Option, Not an Obstacle.

If your tankless water heater installation calls for the use of ½" gas line, Rinnai has two words for you... no problem. Pick the gas line – and the Rinnai – that's right for you.[‡]

Rinnai Tankless Water Heaters are designed to always provide maximum performance and operating efficiency using either a ¾" or ½" gas line, as long as sufficient gas flow is available.

	I				
		GAS LINE			
RINNAI TANKLESS WATER HEATER MODELS	вти	1/2"	3/4"		
WATERTIEATERT MODELEO			MAXIMUM EQUIVALENT LENGTH		
V53e	120,000	100'	450' (137.2 m)		
RUCS65i	130,000	(30.4 m)	350'		
RUS65e	130,000		(106.7m)		
V65e	150,000		300'		
V65i	150,000	70'	(91.44 m)		
RUC80i	152,000	(21.34 m)	250' (76.2 m)		
RU80e					
RUCS75i	160,000	60'			
RUS75e	160,000	(18.29 m)			
RL75i			200'		
RL75e					
V75i	100.000	50'			
V75e	180,000	(15.24 m)	(60.96 m)		
RUC90i					
RU90e					
RLX94i	192,000				
RUC98i					
RU98e					
RL94i	100.000	40' (12.19 m)	175' (53.34 m)		
RL94e	199,000	(12.19 111)			
RUR98i					
RUR98e					

Source: NFPA 54/ANSI Z223.1 National Fuel Gas Code.

Because an undersized gas line can stress a tankless system and potentially reduce its life span, Rinnai Tankless Water Heaters, unlike other tankless water heaters, are equipped with innovative technology that safely ceases operation if it detects inadequate gas flow in order to avoid compromising performance and efficiency.



The table to the left lists the maximum length for both ½" and ¾" gas lines when paired with each of Rinnai's Tankless Water Heaters.

How To Properly Size Your Gas Line:

- · Determine what type of gas is being utilized
- Determine the inlet pressure
- · Determine the allowed pressure drop
- Determine what other types of gas appliances are sharing the gas line
- Determine the maximum loads expected on the whole system as stated in the National Fuel Gas Code



[‡]For complete information on gas sizing for Rinnai Tankless Water Heaters, consult the Operation and Installation Manual.

ACCESSORIES

To further enhance the performance of Rinnai tankless water heating products, these accessories add even more flexibility.









DIGITAL TEMPERATURE CONTROLLER						
Part Number	Description	Temp. Range	Color			
MC-91-2S	Residential/Commercial Standard Digital Controller	98°-140°F / 36°-60°C	Silver			
MC-91-2W	Residential/Commercial Standard Digital Controller 98°–140°F / 36°–60°C White					
MCC-91-2W	Commercial Controller	>140°F / 60°C	White			
MC-100V-1S	Deluxe Digital Controller with Clock and Call Feature	98°-140°F / 36°-60°C	Silver			
MC-100V-1W	MC-100V-1W Deluxe Digital Controller with Clock and Call Feature		White			
BC-100V-1S	Bath Fill Digital Controller	98°-140°F / 36°-60°C	Silver			
BC-100V-1W	Bath Fill Digital Controller	98°-140°F / 36°-60°C	White			
MC-195T-US	24-Hour Digital Controller for Recirculation	98°-140°F / 36°-60°C	Silver/ Black			



ScaleCutter System

SCALECUTTER®				
Part Number	Description	Feed		
103000038	ScaleCutter System 3/4" Feed	3/4"		
103000039	ScaleCutter System Refill	3/4"		



ADDITIONAL ACCESSORIES			
Part Number	Description		
PC-20-W	Pipe Cover Enclosure for Model V53e		
PCD03-EWV	Pipe Cover Enclosure (Euro White)		
RGB-20U	Universal Tankless Recess Box for Model V53e		
RGB-25U-C	Universal Tankless Recess Box for Models RL94e, RL75e, V75e, V65e (VA, VB, VC)		
REU-EZC-1US EZConnect® Cable for Connecting 2 Units			

VENTING PARTS















TERMINATION & TERMINATION KITS					
Part Number	Image	Description	Length	Inner Exhaust Material	Outer Intake Material
223181	1	Universal Horizontal Termination Kit	11.5" / 292.1 mm	Aluminum	Plastic
223188	1	Universal Termination Metal Kit	12" / 304.8 mm	Aluminum	Metal
223182	1	Universal Horizontal Termination Kit	21" / 533.4 mm	Aluminum	Plastic
223187	2	Horizontal Termination Diverter Kit	21" / 533.4 mm	Aluminum	Plastic
223183	3	Universal Horizontal Termination	11.5" / 292.1 mm	Aluminum	Plastic
223184	3	Universal Horizontal Termination	21" / 533.4 mm	Aluminum	Plastic
184118-S	4	Roof Discharge Termination (above roof)	18" / 457.2 mm	Aluminum	Plastic
184127	4	Roof Discharge Termination (above roof)	18" / 457.2 mm	Aluminum	Metal
184119	5	Roof Discharge Termination (above roof); cold climate	38" / 965.2 mm	Aluminum	Plastic
224046	6	Raised Horizontal Termination Kit ("Snorkel")	_	Aluminum	Plastic
185342	_	Roof Termination Extension Kit	_	Aluminum	Plastic

ELBOWS						
Part Number	Image	Description	Inner Exhaust Material	Outer Intake Material		
224050	7	45-Degree Elbow (Quantity of 2)	Aluminum	Plastic		
224063	8	90-Degree Elbow	Aluminum	Plastic		
224250	7	45-Degree Elbow (Quantity of 2)	Aluminum	Metal		
224255	8	90-Degree Elbow	Aluminum	Metal		

VENT PIPE EXTENSIONS						
Part Number	Image	Description	Length	Inner Exhaust Material	Outer Intake Material	
224051	9	Vent Pipe Extension	10"/ 254 mm	Aluminum	Plastic	
224052	9	Vent Pipe Extension	19.5" / 495.3 mm	Aluminum	Plastic	
224053	9	Vent Pipe Extension	39" / 990.6 mm	Aluminum	Plastic	
224054	10	Telescoping Vent Length	2"-12" / 50.8-304.8 mm	Aluminum	Metal	
224275	10	Telescoping Vent Length	2"-12" / 50.8-304.8 mm	Aluminum	Plastic	
224260	9	Vent Pipe Extension	10"/ 254 mm	Aluminum	Metal	
224265	9	Vent Pipe Extension	19.5" / 495.3 mm	Aluminum	Metal	
224270	9	Vent Pipe Extension	39" / 990.6 mm	Aluminum	Metal	

ADDITIONAL					
Part Number	Image	Description			
222053	11	Condensate Trap	Suitable for use		
146141	12	Roof Flashing Assembly (flat roof)	with plastic and metal components		
189950	13	Shingle Roof Flashing (1/12 to 6/12 pitch; plastic)			
189951	13	Shingle Roof Flashing (6/12 to 12/12 pitch; plastic)			
189952	13	Shingle Roof Flashing (8/12 to 16/12 pitch; plastic)			
50171949	14	ile/Shingle Roof Flashing (1/12 to 6/12 pitch; metal)			
50171961	14	Tile/Shingle Roof Flashing (6/12 to 12/12 pitch; metal)			
50171954	14	File/Shingle Roof Flashing (8/12 to 16/12 pitch; metal)			
242141	15	lashing for Metal Roof			
710342	16	Rubber Wall Plate (white)			
710602	16	Rubber Wall Plate (black)			
224045	17	Thimble (1 piece per box)			
169044	18	Pipe Clamp			
224097	19	Metal Pass Through Plate			
224042	20	Universal Bug Guard			





TANKLESS WATER HEATERS MODEL CHART AND SPECIFICATIONS.


	Value Series				
Model	V75i	V75e	V65i	V65e	V53e
Dimensions - w, h, d Inches (mm)	14 x 23 x 9 (355.6 x 584.2 x 228.6)	14 x 23 x 9 (355.6 x 584.2 x 228.6)	14 x 23 x 9 (355.6 x 584.2 x 228.6)	14 x 23 x 9 (355.6 x 584.2 x 228.6)	14 x 21 x 7 (355.6 x 533.4 x 177.8)
Weight (lbs / kg)	45.6 / 20.7	43.6 / 19.8	45.6 / 20.7	43.9 / 19.8	34 / 15.4
Installation Type	Indoor	Outdoor	Indoor	Outdoor	Outdoor
Min./Max. BTU (natural gas)	10,300/180,000	10,300/180,000	10,300/150,000	10,300/150,000	19,000/120,000
Min./Max. BTU (propane)	10,300/180,000	10,300/180,000	10,300/150,000	10,300/150,000	20,200/120,000
Energy Factor	0.82	0.82	0.82	0.82	0.82
Temp. Range Residential	98°–140° F (37°–60° C)	98°–140° F (37°–60° C)	98°–140° F (37°–60° C)	98°–140° F (37°–60° C)	120°–140° F (49°–60° C)
Temp. Range Commercial			Residential Only		
Min. Activation Rate	0.4 gpm (1.5 lpm)	0.6 gpm (2.3 lpm)			
Flow Rate (70° / 50° Temp. Rise)	4.3 / 6.0 gpm (16.3 / 22.7 lpm)	4.3 / 6.0 gpm (16.3 / 22.7 lpm)	3.6 / 5.0 gpm (13.6 / 18.9 lpm)	3.6 / 5.0 gpm (13.6 / 18.9 lpm)	2.8 / 4.0 gpm (10.6 / 15.1 lpm)
Hot Water Flow Rate Range	0.26–7.5 gpm (0.98–28.4 lpm)	0.26–7.5 gpm (0.98–28.4 lpm)	0.26–6.5 gpm (0.98–24.6 lpm)	0.26–6.5 gpm (0.98–24.6 lpm)	0.60-5.3 gpm (0.98-20.1 lpm)
Controller (standard)	MC-91-2US	MC-91-2US	MC-91-2US	MC-91-2US	Status Monitor
Controllers (optional)		MC-100-1,	BC-100V-1		MC-91-2US
Ultra Low NOx	yes	yes	yes	yes	no
Warranty (Residential)*		Limited 10-year on he	eat exchanger, 5-year on p	parts, 1-year on labor	
Warranty (Commercial)*			Residential Only		
Mobile Home Certified	yes	yes	yes	yes	yes
Valves Shipped in Box	no	no	no	no	no
High Altitude Approved	Up to 10,200 ft. (3,109 m)				
Certifications	AHRI and CSA				
Venting Options	Concentric	N/A	Concentric	N/A	N/A
TRS Compatible	no	no	no	no	no
½" Gas Line Compatible**	yes	yes	yes	yes	yes

^{*} For complete information and details regarding Rinnai's warranty, visit rinnai.us.

^{**} For complete information on gas sizing for Rinnai Tankless Water Heaters, consult the Operation and Installation Manual.


RINNAI TANKLESS WATER HEATERS FLOW CHART AND HERS DATA.

RINNAI TANKLESS WATER HEATERS HOT WATER FLOW CURVE

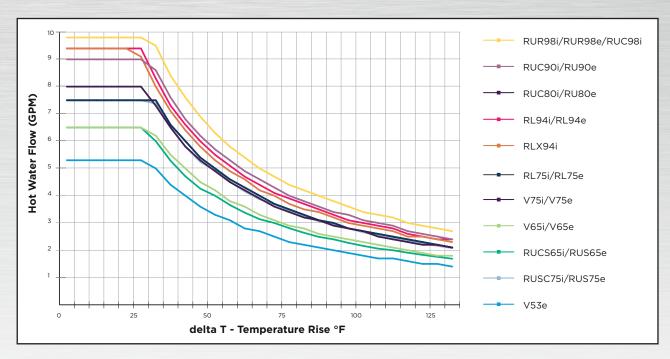

Tankless water heater output is based on delta T which is the difference between the incoming water temperature and the requested output temperature. This chart is used along with other factors to help size the Rinnai Tankless model for your application.

HERS SCORES IMPROVE WITH RINNAL TANKLESS WATER HEATERS

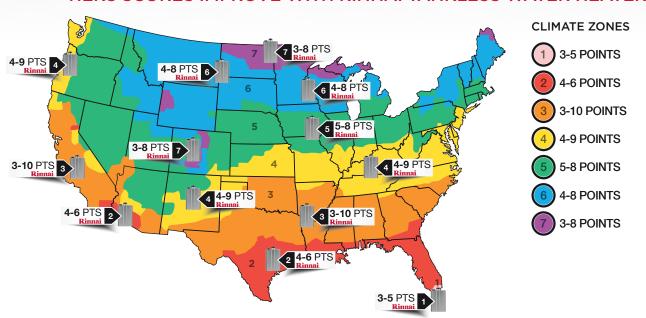

The Home Energy Rating System (HERS) Index is the industry standard by which a home's energy efficiency is measured. A lower HERS Index Score means a more energy efficient home, which means lower energy costs.

Data analysis conducted by independent third party HERS rater compares traditional electric and gas residential storage tank water heaters to Rinnai's Condensing and Non-Condensing Tankless Water Heaters. Consult and validate your specific application with a



A tradition of TRUE RELIABILITY.

For nearly 100 years, we at Rinnai have been fiercely committed to delivering nothing less than a superior experience at every touch point.

Beyond manufacturing the highest quality products, our people stand behind all that we make—before, during and long after installation. From the 24/7/365 technical support for professionals, to our national network of independent installers for homeowners, to on-staff engineers who can assist with choosing the right products and sizes—we're inspiring confidence right along with the comfort our solutions provide.







©2015 Rinnai America Corporation. Rinnai is continually updating and improving products; therefore, specifications are subject to change without prior notice. Local, state, provincial, federal and national fuel gas codes must be adhered to prior to and upon installation.

Toll-Free: 1-800-621-9419 • Phone: 678-829-1700 • www.rinnai.us