


Part No.	Reference No.	Quantity	Description
0000098218~S	*		BLOWER
0000098219~S	*		BURNER
0000098221~S	*		CONTROLS
0000098225~S	*		FRONT DOOR PANEL
0000098217~S	*		GENERAL ASSEMBLY
0000098226~S	*		HEAT EXCHANGER
0000098230~S	*		INDUCER & VENTING
0000098228~S	*		MODEL NUMBER DESCRIPTION

Part No.	Reference No.	Quantity	Description
0000032689~P	*		BLOWER PARTS LIST

BLOWER

75011091


RB
B

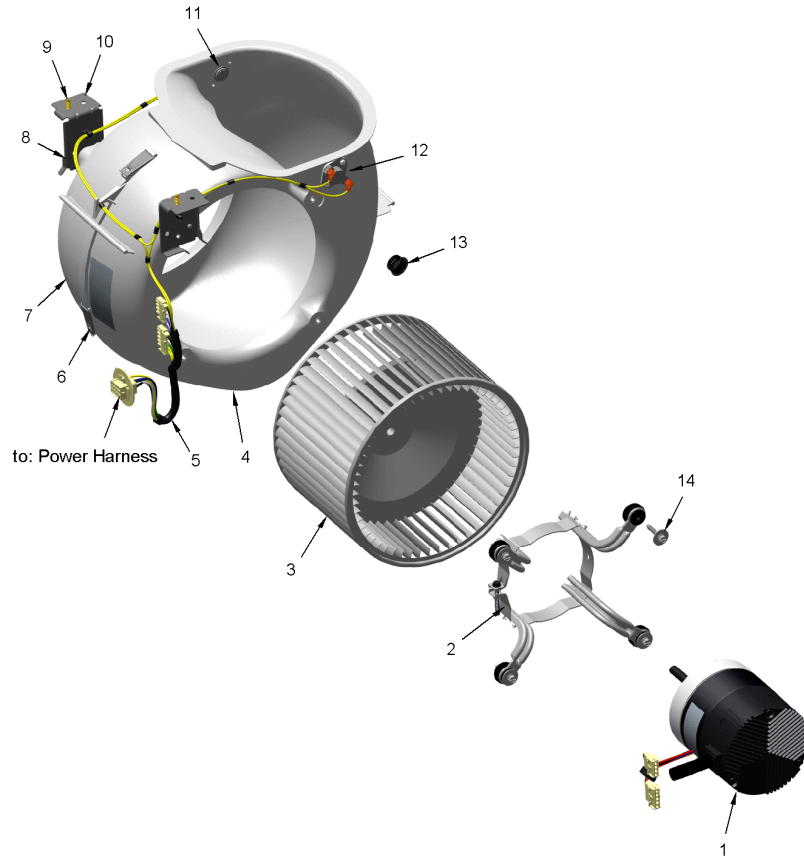

This is a typical illustration. The unit in the field may not appear exactly as shown.

Part No.	Reference No.	Quantity	Description
BND00932	*	1	BAND; MOTOR MOUNT, 17.62 LENGTH
BND00934	*	1	BAND; BELLY BAND ASSEMBLY, INCLUDES BAND, MOTOR LEGS, MOUNTING HARDWARE
WIR11173	*	1	WIRE; HARN-BLW-ECM-C-D-UF
MOT20547	1	1	MOTOR; EON VS MOTOR - 7 COEFFICIENT 1HP
BLT01015	2a	1	BOLT; BELLY BAND, 1/4-20 UNC-2B, 3/8 HEX WASHER HEAD
BND00917	2b	6	BAND; BELLY BAND ASSEMBLY, INCLUDES BAND, MOTOR LEGS, MOUNTING HARDWARE
WHL03316	3	1	WHEEL; BLOWER, 11.93 OD DIA, 10.68 WIDTH, 0.50 IN BORE, CW
HUS04194	4	1	HOUSING; BLOWER, MOLDED HALF, RIGHT SIDE, 18.24 X 15.37 X 8.92
WIR08824	5	1	WIRE; HARNESS, 12-PIN-ECM MOTOR (BLU,WHT,BLK,GRN,YEL WIRES)
CLP01123	6	4	CLIP; CLEAT-BLOWER
HUS04195	7	1	HOUSING; BLOWER, MOLDED HALF, LEFT SIDE, 18.24 X 15.37 X 8.79
SCR01011	9	3	SCREW; 1/4-20 C HXW 5/8 S N
BRK04573	10	2	BRACKET; BLOWER DECK MOUNT, 3.78 X 2.51 X 2.19
SWT01649	11	1	SWITCH; REVERSE AIRFLOW, OPEN 105F, CLOSE 95F, 120/240V, 1/4QC TERM
SWT03982	12	1	SWITCH; REVERSE FLOW, OPEN AT 105F, CLOSE AT 95F
SCR02112	14	4	SCREW; ASSEMBLY-MOTOR MOUNT

Part No.	Reference No.	Quantity	Description
0000036827~P	*		BURNER PARTS LIST

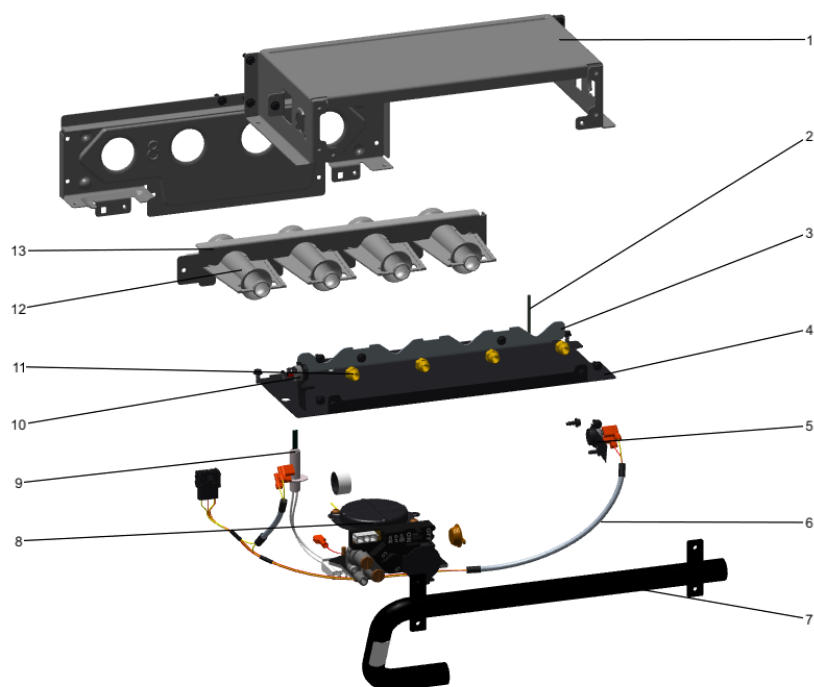


Part No.	Reference No.	Quantity	Description
BRK04580	*	1	BRACKET; IGNITER, 2.063 X 0.875 X 0.456
BRK04581	*	1	BRACKET; FLAME SENSOR, 2.063 X 0.875 X 0.456
PIP02095	*	1	PIPE; U-BEND, STEEL, 1/2-14 NPT, 3.42 X 2.00
BOX02755	1	1	BOX; BURNER, 5.74 X 18.08 X 2.63
SEN02662	2	1	SENSOR; FLAME FOR NATURAL GAS AND LP, KANTHAL D
CMP01469	3	1	CLAMP; BURNER-6
PLT05662	4	1	PLATE; 6 BURNER, 18.08 X 5.61
SWT03968	5	1	SWITCH; FLAME ROLLOUT, 190F OPEN, 5.8 FLA, 34.8 LRA AT 120 VAC, 24 VAC, MAN RESET 100F, AUTO RESET -31F, FIXED TEMP THERMOSTAT AND NON-ADJ
WIR09934	6	1	WIRE; HARNESS-BURN-5-6
MFD01446	7	1	MANIFOLD; 6
VAL09030	8	1	VALVE; GAS, NON DIRECT VENT 2 STAGE, 1/2-14 NPT, 24V, 50/60 HZ, "J" SERIES
IGN00152	9	1	MIN=12/12 IGNITER; SILICON-NITRIDE, 120V, INCLUDES BRACKET AND SCREWS
SWT03967	10	1	SWITCH; FLAME ROLLOUT, 190F OPEN, 5.8 FLA, 34.8 LRA AT 120 VAC, 24 VAC, MAN RESET 100F, AUTO RESET -31F, FIXED TEMP THERMOSTAT AND NON-ADJ
ORF01427	11	6	ORIFICE; SPUD, DRILL #45, BRASS
BNR01233	12	6	BURNER; 0.50 ID INSHOT BURNER, NATURAL GAS, STAINLESS STEEL, 2.75 X 4.50
HLD00629	13	1	HOLDER; 6 BURNER, 17.625 X 1.531

Part No.	Reference No.	Quantity	Description
0000035968~P	*		CONTROLS PARTS LIST

CONTROLS

75012553


RP
A

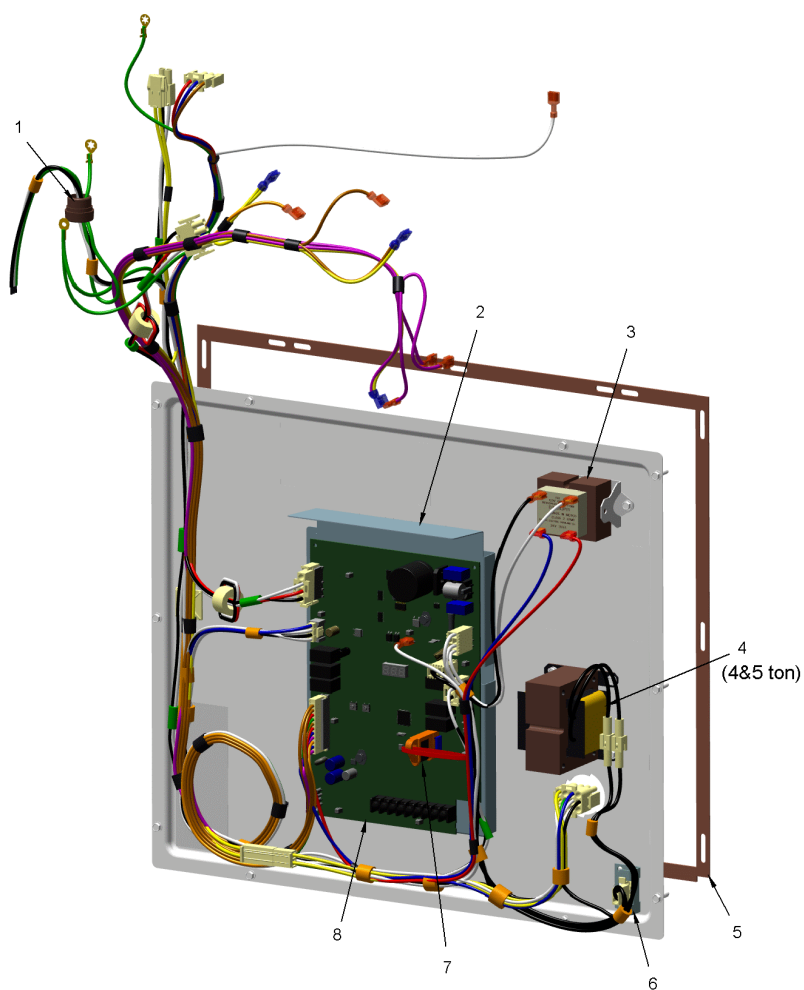

This is a typical illustration. The unit in the field may not appear exactly as shown.

Part No.	Reference No.	Quantity	Description
TIE00023	*	1	TIE;CABLE, 8.00IN.
BUS00300	1	1	BUSHING; STRAIN RELIEF
SHD00602	2	1	SHIELD; BRACKET-IFC, SHEET METAL, 5.91 X 9.03
TRR02736	3	1	TRANSFORMER; 115V-24V, 35VA, 60 HZ, CLASS 2
TRR02737	4	1	TRANSFORMER; CHOKE LINE, 12 AMPS RMS AC, 600V
GKT05000	5	4	GASKET; VESTIBULE GASKETS, ONE SIZE FITS ALL - TRIM TO FIT
MOD01574	7	1	MODULE; TO ORDER-SEE EXT NOTE
CNT06687	8	1	CONTROL; IFC CONTROLS

Part No.	Reference No.	Quantity	Description
0000036855~P	*		DOOR ASSEMBLY PARTS LIST

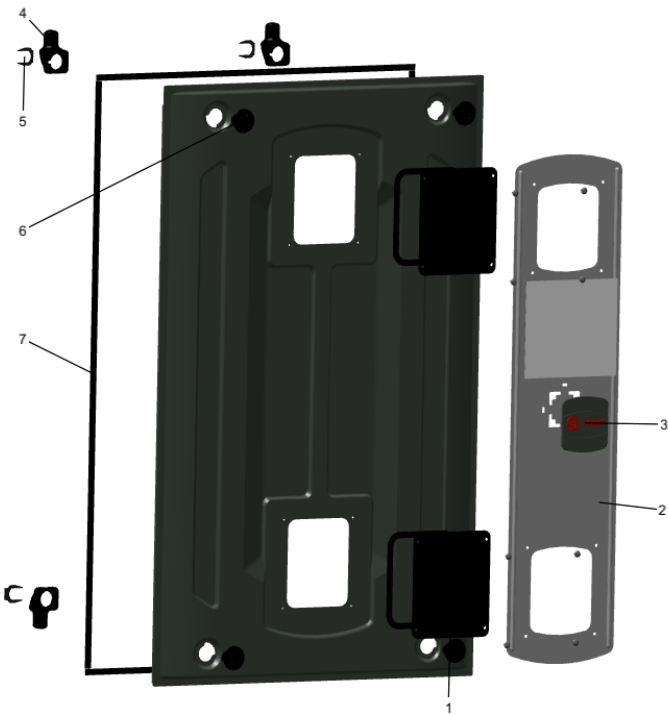

Part No.	Reference No.	Quantity	Description
DOR04646	*	1	DOOR; ASM-90D-HIGH
PLT05665	*	0	PLATE; AMERICAN STANDARD BADGE, 3.17 X 3.00
GLS01089	1	2	GLASS; ASSEMBLY, INCLUDES SITE-GLASS, GASKET, 8 SCREWS
PLT05663	2	1	PLATE; DOOR OVERLAY, 28.77 X 7.00
PLT05664	3	0	PLATE; TRANE BADGE, 3.17 X 3.00
LAT01036	4	4	LATCH; TANG
LAT01037	5	4	LATCH; CLIP
LAT01035	6	4	LATCH; HUB
GKT04783	7	4	GASKET; DOOR GASKETS, TOP/BOTTOM X 2, SIDES X 2, ONE SIZE FITS ALL - TRIM TO FIT


Part No.	Reference No.	Quantity	Description
0000013797~P	*		GENERAL ASSEMBLY GRAPHIC

S-SERIES FURNACE

75011112


REV.
A

Upflow

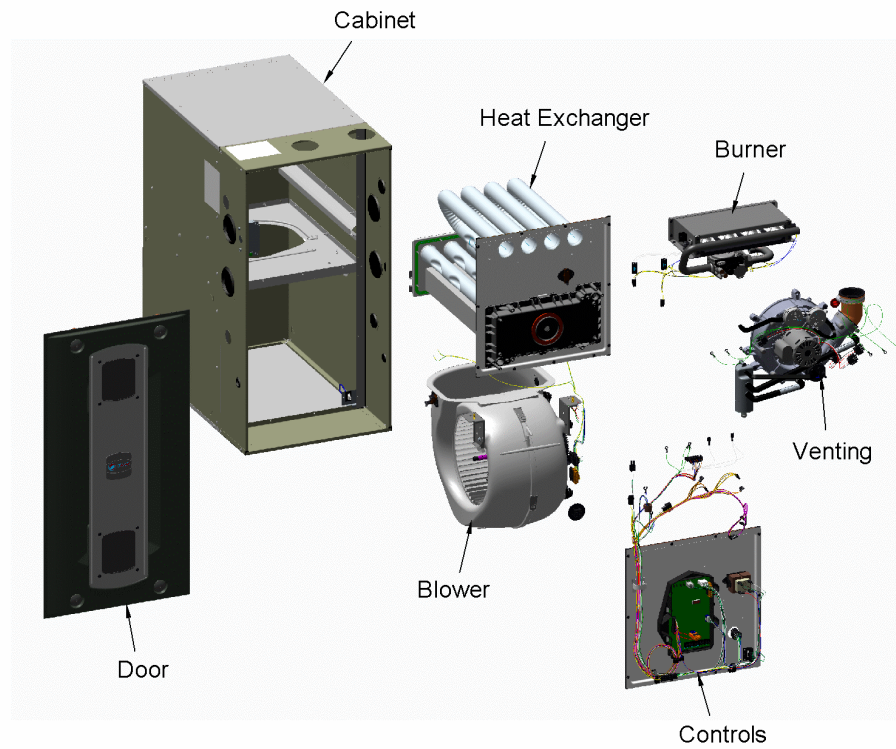

This is a typical illustration. The unit in the field may not appear exactly as shown.

Part No.	Reference No.	Quantity	Description
0000044067~P	*		HEAT EXCHANGER PARTS LIST

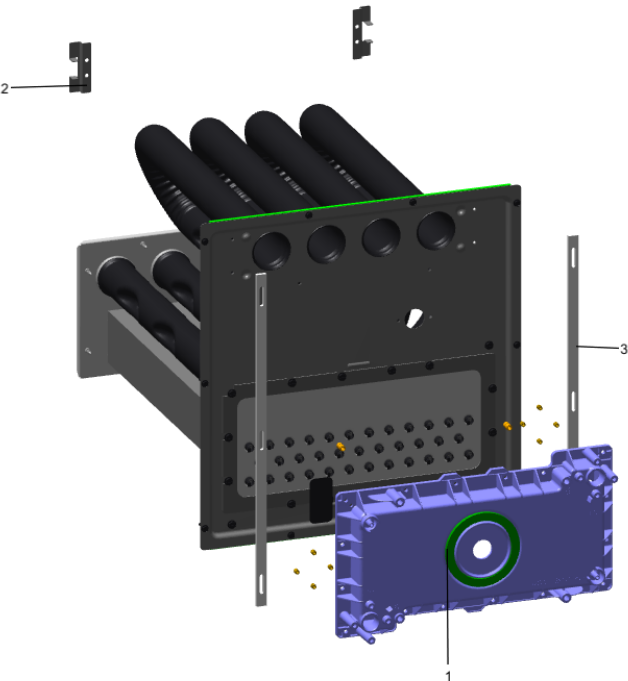

Part No.	Reference No.	Quantity	Description
EXC02724	*	1	EXCHANGER; HEAT HX-ASM-D120
SWT03938		1	SWITCH; LIMIT, OPEN AT 135F, CLOSE AT 105F
GKT04780	1	1	GASKET; BLOWER INDUCER, GREEN SILICONE, 3.70 OD X 2.90 ID
BRK04574	2	2	BRACKET; HX HOT HEADER SUPPORT, 2.50 X 1.00
GKT05000	3	4	GASKET; VESTIBULE GASKETS, ONE SIZE FITS ALL - TRIM TO FIT

Part No.	Reference No.	Quantity	Description
0000044086~P	*		INDUCER VENTILATION PARTS LIST



Part No.	Reference No.	Quantity	Description
BLW01462	*	1	BLOWER; INDUCER-S9-SERIES-VARIABLE SPEED
SWT04222	*	0	SWITCH; PRESSURE
SWT04228	*	0	SWITCH; PRESSURE
BLW01486	1	1	BLOWER; INDUCER-S9V2-VS-SERIES
PLU01271	2	1	PLUG; CONDENSATE, 0.77 OD X 0.50 ID
ELL01525	3	1	ELBOW; BLACK, WITH BOOT AND CLAMP
CAP01301	4	1	CAP; PRESSURE, BLACK VINYL, 0.25 ID X 0.625 L
SWT03927	5	1	SWITCH; BLOWER INDUCER LIMIT SWITCH, 155F OPEN, 95F CLOSE
SWT04132	6	0	SWITCH; PRESSURE SWITCH -1.50
HSE01885	7	1	HOSE; PRESSURE, 0.225 ID X 7.0 L, PS1
SWT04126	8	0	SWITCH; PRESSURE SWITCH -0.55
HSE01883	9	1	HOSE; PRESSURE SWITCH, BLACK EPDM RUBBER, 0.225 ID X 19.50 L
HSE01887	10	1	HOSE; BLOWER INDUCER, CONDENSATE, BLACK EPDM, 17.00 L, 0.475 ID
SWT03926	11	1	SWITCH; CONDENSATE, POS PRESSURE, SPST, 28VA PILOT DUTY AT 24 VAC, 125VA PILOT DUTY AT 125VAC, SNAP ACTING CONTACTS, OPERATING TEMP RANGE: -40 TO 185F
HSE01890	12	1	HOSE; CONDENSATE, BLACK EPDM, 10.00 L, 0.475 ID
SEP00271	13	1	SEPARATOR; ASSEMBLY-UPFLOW, INCLUDES TRAP, ADAPTERS, O-RINGS AND SCREWS
RNG02446	14	4	RING; O-RING, 0.55 ID, EPDM RUBBER
ADP01426	15	1	ADAPTER; PVC PLASTIC, 0.718 ID, 1.20 ID
HSE01884	16	1	HOSE; HIGH PRESSURE, BLACK EPDM RUBBER, 0.225 ID X 12.00 L
SCR02472	17	3	SCREW; 10-32 MACHINE SCREW, 5/16 SLOTTED HEX WASHER

Part No.	Reference No.	Quantity	Description
0000005337~P	*		MODEL NUMBER GRAPHIC

MODEL NUMBER DESCRIPTION		75011116	RB B
S-SERIES FURNACE			
Example Model Number: S 9 V 2 B 0 8 0 U 3 P S A A A 1 - - - - 5 - - - - 10 - - - - 15 Digit 1 – Level S = Series L = 14 ng/J Ultra-Low NOx Digit 2 – AFUE 8 = 80% 9 = 90% or higher Digit 3 – Blower Type B = Builder Series (May be PSC or CTM) P = PSC X = CTM V = Variable Speed Digit 4 – Gas Valve Stages 1 = SingleStage 2 = 2 Stage M = Modulating Digit 5 – Cabinet Width A = 14.5 wide B = 17.5 wide C = 21.0 wide D = 24.5 wide Digits 6,7,8 – BTU input 080 = 80,000 BTUH Digit 9 – Poise Options U = 3 way D = Dedicated Downflow M = 4 Way Poise Digit 10 – Airflow Capacity for Cooling 2 = 2 Tons 3 = 3 Tons 4 = 4 Tons 5 = 5 Tons Digit 11 – Inducer Type P = PSC X = CTM V = Variable Speed Digit 12 – Communicating capability S = 24 Volt C = Communicating System Control T = 24 Volt, 40ng/J NOx D = Communicating System Control, 40ng/J NOx Digit 13 – Major Design Change Digit 14 – Minor Design Change Digit 15 – Service Digit Change			
1 of 1			

