




CONNECTIONS

- Discharge: 1/4" (6mm)
- Inlets
- Comes equipped with a magnetic float for activation

PRODUCT FEATURES

- Pump designed to discharge condensate from mini-split systems and air conditioning units. Its compact size and efficient performance ensure smooth operation while maintaining a quiet environment.
- Pumps condensate waste up to 20 feet in height and/or 150 feet away from a soil stack. Can handle a capacity of up to 27,000 BTUs (8kW).
- Comes equipped with a 4' flexible hose, power cable, vent tube, mounting plate, and bracket for convenient setup.

PUMP CURVE

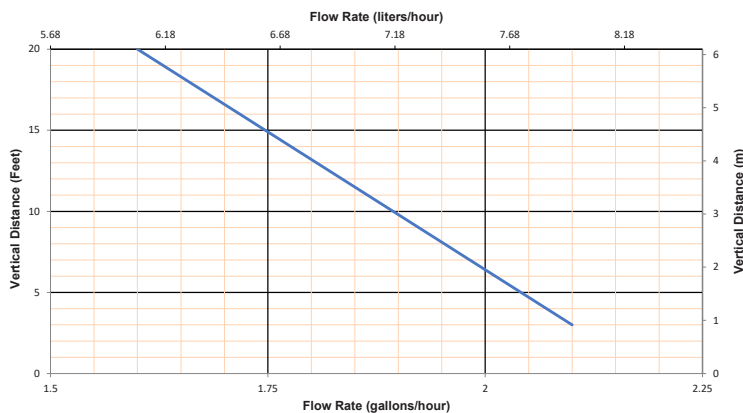

TECHNICAL SPECIFICATIONS

- Pump type:** Condensate pump
- Electrical:** 220/240V - 60 Hz / 0.15 Amps (Max)
- Power:** 22 W
- Operating Temperature:** 95°F Max
- Power cord length:** 55"
- Noise level:** ≤ 21 dBA (Lp) (measured at 3 ft.)
- Discharge pipe diameter:** 1/4" (6mm)
- Discharge rate at 20 ft:** 1.6 GPH
- Discharge rate at 3 ft:** 2.1 GPH
- Normal running time:** 3-5 sec (Short bursts)
- Shut-off head:** 66 ft.
- Suction head:** 6.5 ft. Max
- Inlets:** 1 inlet, 5/8" diameter (16mm)
- Method of activation:** Float w/ a magnet
- Weight:** 1 lb / 0.5 kg
- Certifying agencies:** CSA (IPC, NSPC)
- Connections:** Mini-split systems, A/C units

DIMENSIONAL DRAWINGS

