


Meter/Load Center Combinations


FEATURES

- UL Listed only for use as service entrance equipment
- Overhead feed only
- Side hinged door, only one screw required to remove door
- Captive deadfront screw
- 22K AIC rating
- Meter socket jaw guides provided on ringless devices
- Ring and ringless versions available
- 5th jaw option available
- Surface mount
- NEMA Type 3R enclosure with painted, G90 galvanized steel Alstan[®] tin-plated aluminum bus bars
- Feed-thru lugs

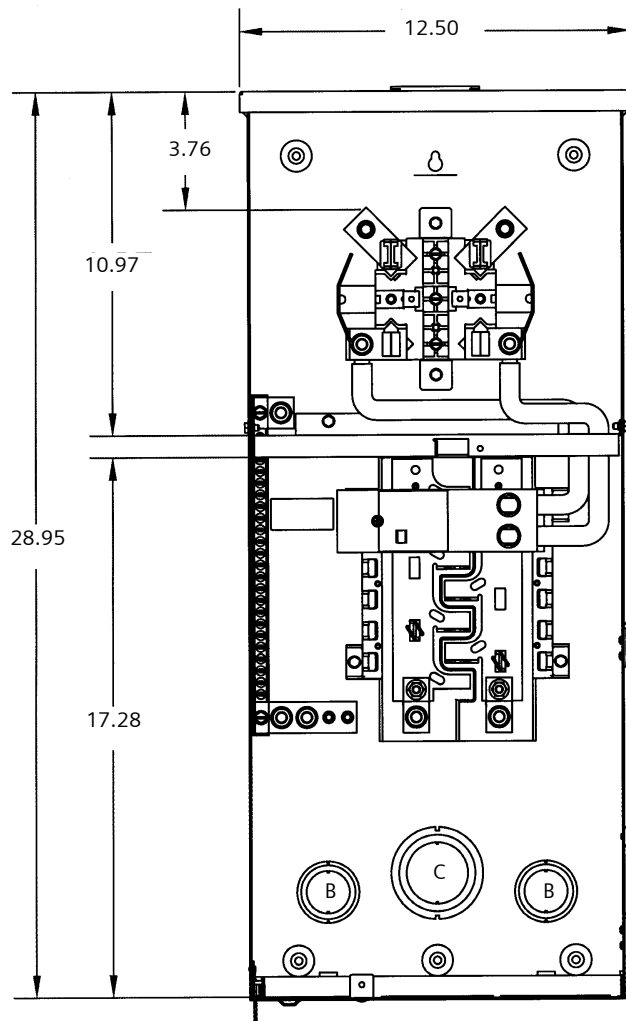

Knockout Code

- | | |
|---|----------------------------------|
| A | = 1/2", 3/4" |
| B | = 1", 1-1/4", 1-1/2" |
| C | = 1-1/2", 2", 2-1/2" |
| D | = 1-1/4", 1-1/2", 2", 2-1/2", 3" |

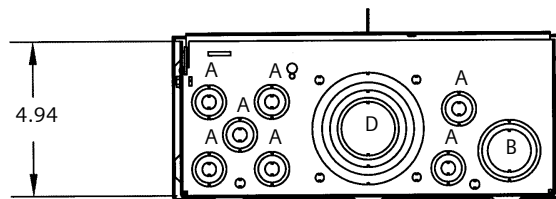

Meter Socket Ampere Rating	Catalog Number	Max. 1" Spaces	Max. Circuits	Phase	Main Ampere Rating	Number of Jaws	Type of Bypass	Type of Cover
200	MC0816B1150T	8	16	Single	150	4	None	Ring
200	MC0816B1200T	8	16	Single	200	4	None	Ring
200	MC0816B1200RT	8	16	Single	200	4	None	Ringless

Family Type F

fastfax

SIEMENS