

DOUBLE 3/8" COMPRESSION OUTLET CONNECTION OUTLET BOX

696 series

Ox Box™

SPECIFICATION

Sioux Chief 696 series Ox Box double 3/8" compression outlet connection outlet box shall be used where necessary in plumbing supply systems. Box shall allow for mounting with supply lines from top or bottom, on-stud or between studs. Unit shall be available with plain valves or valves and water hammer arresters. Arresters shall be certified to ASSE 1010 and shall be UPC listed. Metal support bracket shall install into top track of box for between stud configuration. Outlet connections shall be generally 3/8".

MATERIALS

outlet box: ABS

frame: ABS

bracket: galvanized steel

arrestor body: Type L copper tube

piston: polypropylene with two EPDM o-rings

piston lubrication: Dow-Corning, 111 FDA approved silicone compound

valve body: chrome-plated forged brass

VALVE/ARRESTER WORKING LIMITS

max working temperature: 250°F


maximum testing air pressure: 100 PSIG

maximum working/testing pressure: 250 PSIG


DIMENSIONS

A: frame width	5 3/4"
B: frame height	7 1/4"
C: frame opening width	3 5/8"
D: frame opening height	5 1/8"
E: rough-in box inner width	4"
F: rough-in box overall depth	3 1/2"
G: rough-in box inner height	5 1/2"
H: supply connections	1/2" nominal (see 'C' below)
I: outlet connections	3/8" compression
J: bracket length	18"
K: bracket width	5/8"
bracket thickness	16 gauge

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____

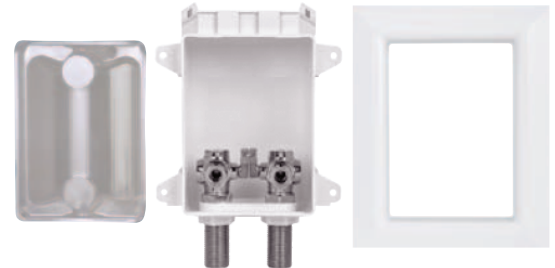

696-2001MF

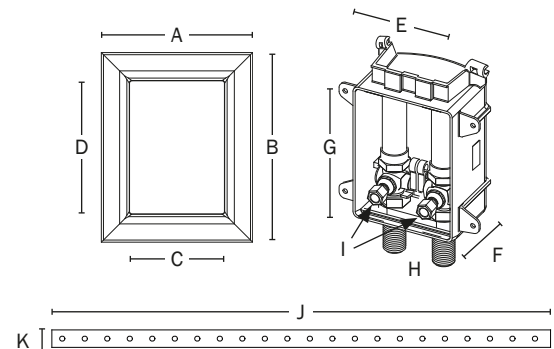

CERTIFICATIONS/APPROVALS

Listed by UPC/IAPMO to meet UPC

Conforms to IPC

Valves meet ASME A112.18.1

SCM items available with no-lead valves are compliant with NSF-61 Annex G and California No Lead Plumbing Law



Create Item Number

696 A 20 B 1 C D

e.g. 696-2011MF = double 3/8" compression outlet connection box, female sweat valves with arresters, packaged with frame

A VALVES

- ☐ - Plain valve
- ☐ -G No-lead valves¹

B ARRESTER

- ☐ 0 No arrester
- ☐ 1 With arrester

C SUPPLY CONNECTION

- ☐ M 1/2" female sweat
- ☐ C 1/2" male CPVC
- ☐ X 1/2" PEX crimp F1807
- ☐ W 1/2" PEX cold expansion F1960
- ☐ V 1/2" Viega PureFlow® PEX
- ☐ A 1/2" PEX cold expansion F2080

D FRAME PACKAGING

- ☐ F Standard pack (supply box, frame, bracket, debris cover)
- ☐ R Rough-in pack² (supply box, bracket, debris cover)

¹ Compliant with NSF-61 Annex G and California No Lead Plumbing Law

² Order frame (696-1F) separately.