

KITCHEN SUPPLY ACCESS BOX - 3/8" VALVES (3)

696 SERIES

OxBox™

SPECIFICATION

Sioux Chief OxBox access box with 3 valves shall be used in plumbing systems for safe distribution of hot and/or cold water. Boxes shall provide access for supply line shutoff. Valves shall generally be available with 3/8" connection outlet. Boxes can be installed with supply lines from above or below, on or between studs. Between-stud installation can utilize a support bracket loaded through the box's integral track. Boxes shall be available with three standard valves or two standard valves and one valve with water hammer arrester. Valves are provided with a temporary nylon test cap. Included arresters shall be certified to ASSE 1010 and valves shall be UPC listed. Valves comply with ASME A112.18.1 and are made from no lead, SCC resistant and DZR material.

MATERIALS

Outlet Box: White ABS

Bracket: Galvanized steel

Arrester Body: Stainless steel

Piston: Polypropylene with two EPDM o-rings

Piston Lubricant: FDA-approved silicone

Valve: Chrome-plated DZR brass - No-Lead

VALVE/ARRESTER WORKING LIMITS

Max Working Temp: 250 °F


Max Pressure - Air Test: 100 PSIG

Max Working Pressure: 250 PSIG


DIMENSIONS

A:	Box rough-in depth	3 3/8"
B:	Box rough-in height	5 3/8"
C:	Box rough-in width	3 7/8"
D:	Bracket length	10 1/2" – 18"
E:	Valve pair - on-center	2"
F:	Single (opposing) valve	Centered in box

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

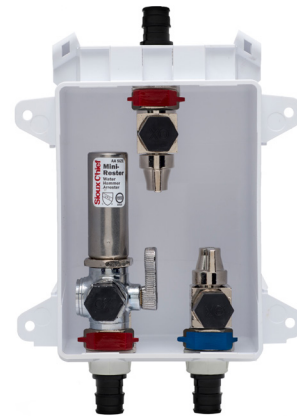

696-G3011WR

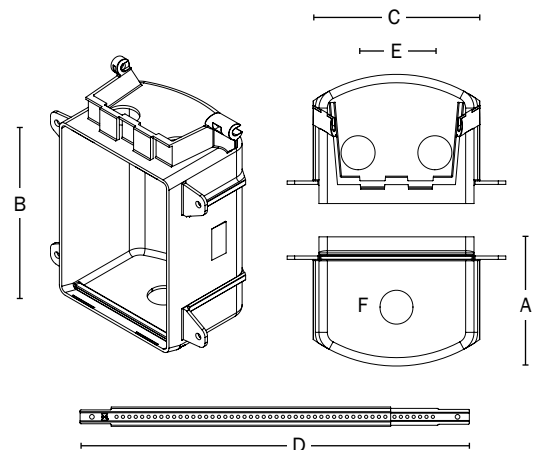

Create Item Number

696-G30AB

e.g. **696-G3001WR:** Access box with three no-lead valves, ASTM F1960 Grip™ connections. Frame sold separately

ARRESTERS A

- ☐ **01** = No arresters
- ☐ **11** = Arrester on one valve for dishwasher supply

CONNECTION TYPE B

- ☐ **CR** = 1/2" Male CPVC
- ☐ **MR** = 1/2" Female sweat
- ☐ **WR** = 1/2" F1960 Grip™
- ☐ **XR** = 1/2" F1807 Crimp™

ACCESSORIES (ordered separately)

- ☐ **696-1F** = ABS frame
- ☐ **697-1F** = Stainless steel frame
- ☐ **697-1FL** = Stainless steel frame and locking door