


OmniPanel™

» Dual-Valve Access Panel

Patent # 9,057,460 B2

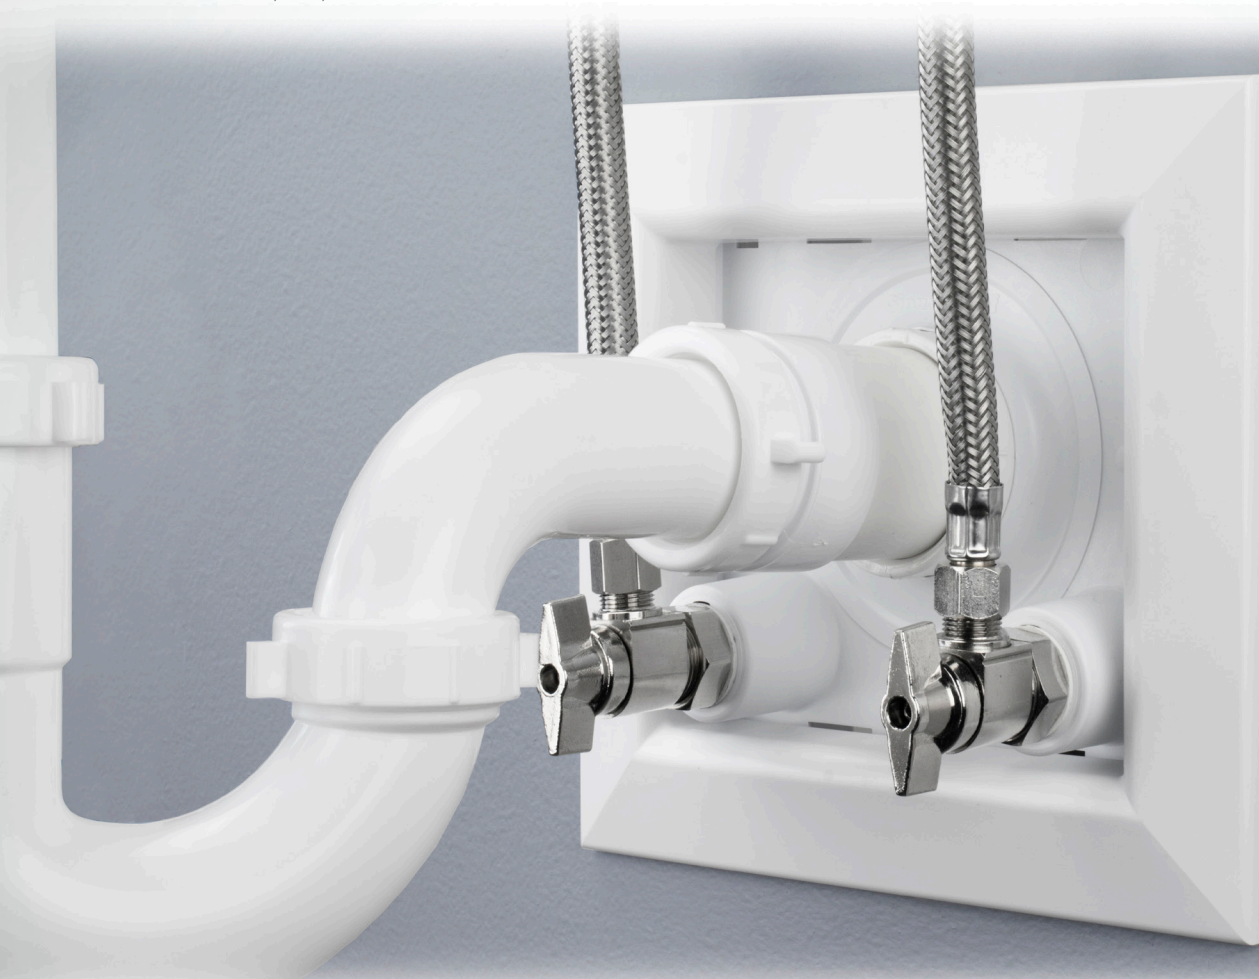

Fewer Touches

Valves are installed at rough, keeping them on test throughout the job, no drain down.

Savings

Saves time with every installation.

No more separate parts and pieces – Multiple components are replaced by one easy-to-install product.

Reduced Liability

Fewer potential leaks from faulty installation.

No wobbly stub outs, exposed tube/joints or inferior valves.

Standardized

Installations are consistent – Clean, solid and professional.

Valves are replaceable with standard 5/8" OD supply stops.



Supply

Drainage

Support

Specialties

www.siuouxchief.com

TAKE THE FIELD.



Recommended Installation

Supply Valves
Below Drainage

Strong



Engineered, reinforced material provides a solid foundation for permanent valve installation.

Convenient

Versatile mounting options. Fasten directly to stud or position between studs using brackets provided.

Universal




No need to tear into drywall. Valves are easily accessible from the finish side of the wall and can be replaced with ANY standard $\frac{5}{8}$ " OD compression stop valve

Lavatory



Pre-colored white material provides clean, consistent looks. Matching frames and extensions available.

Laundry

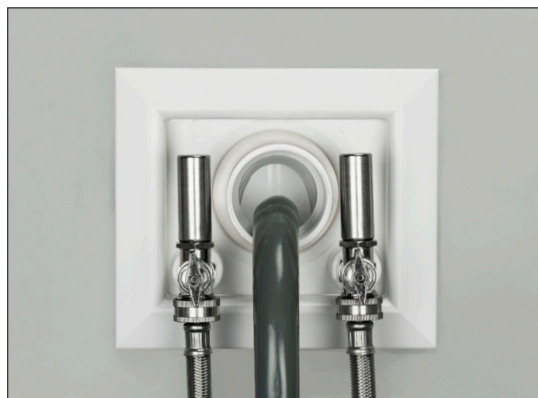

Works perfectly as a laundry supply panel. Use a flush-facing 2" DWV elbow for drain hose

Patented Elastomer

Flexible port seals around drainage arm. Accommodates penetrations from 1½" pipe to 2" DWV fitting hub.

Installs On or Between Studs



Set screw through panel to lock into place


Protected



OmniPanel™ installs securely at rough-in. Valve caps, debris cover, and best-in-class materials protect installations during construction and over lifetime of the system.



All valves include nylon, hex test caps
No dropped tests. Resists tampering by other trades during construction.

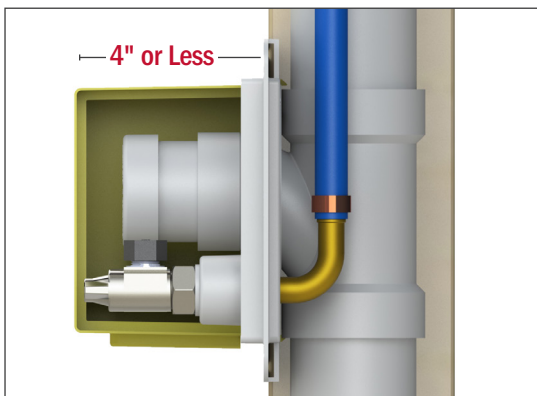

Drainage arm rough-in should be no longer than 4" to fit under the debris cover.



Use zip-ties (included) to keep debris cover in place. Keeps valves (and your pressure test) protected.

Patented Valve Design


Exclusive to Sioux Chief Access products.

Patent # 9,725,892 B2

Multiple mounting options.
Screw to stud, or mount
between studs.
Can be installed vertically
or horizontally.

Red and Blue clips
provided with all valves.
Attach to indicate
hot/cold lines

Attractive, plated
valves with easy-grip
T-handle

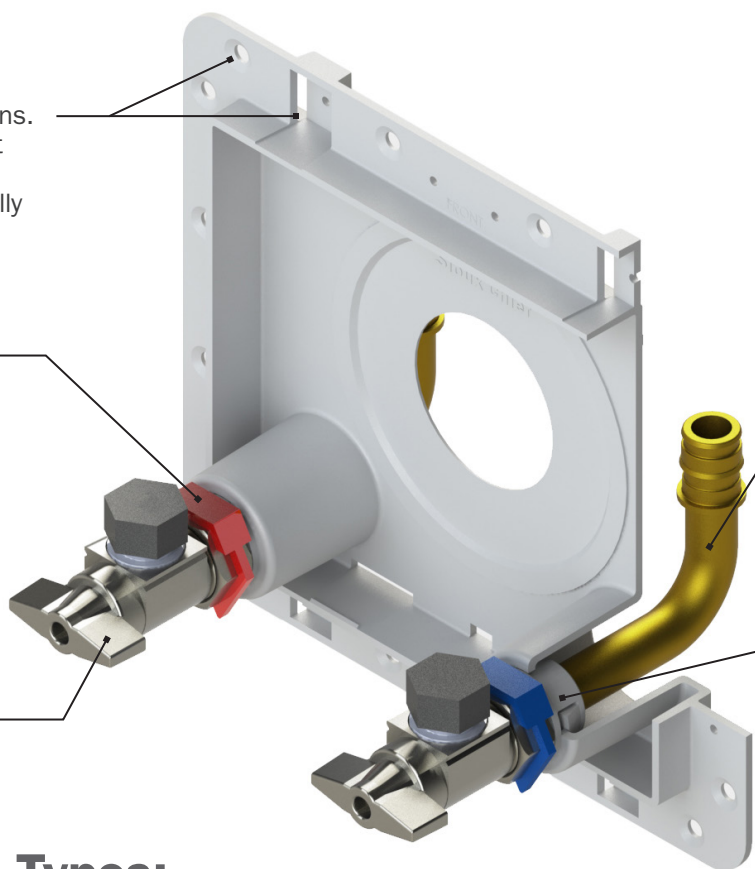


Solid brass elbow inlet
is designed for improved
water flow. Positions
supply tubing in center
of stud cavity for
protection

Simply push to lock valves
into place. Key-&-Slot
design will not rotate
after installation


Connection Types:




ASTM F1960 Grip™




ASTM F1807 Crimp™



CPVC Socket



MIP/F.SWT



M.SWT/Push/Press
with push-fitting lock groove

Valve Options:



3/8" OD comp. valves
for typical lavatory
supply

3/4" Male hose for
laundry or appliance
connections




Optional MiniRestor™ provides code-
required protection for appliances with
quick-closing valves

Quality



Valves and connection elbows
are made from C69300 brass;
The **Best Material Available** for
protection against dezincification
and stress-corrosion cracking


Complete Rough-In Package

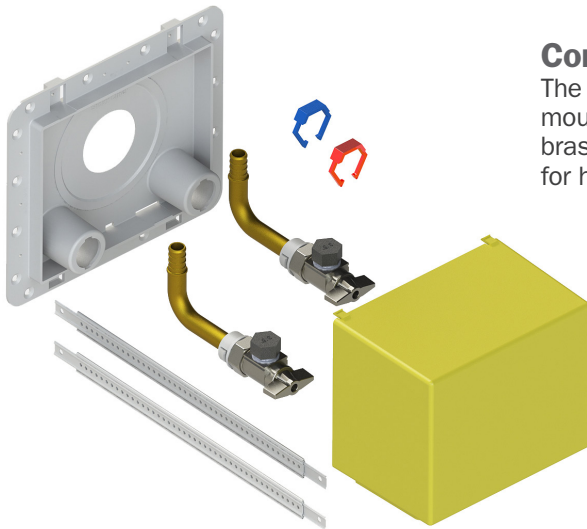

Complete Rough-In Package

The OmniPanel™ includes everything you need, when you need it: a sturdy mounting/access plate, adjustable brackets, high-quality valves with brass elbow connection, protective debris cover, and color clips for hot/cold lines.


Finish frames are available separately, keeping them OFF the job (not lost, not damaged) until finish




Flexible Drainage Port



The OmniPanel™ features an integral, elastomeric center port, which will accommodate 1 1/2" pipe/hub and will even wrap over a 2" Sch. 40 fitting hub.

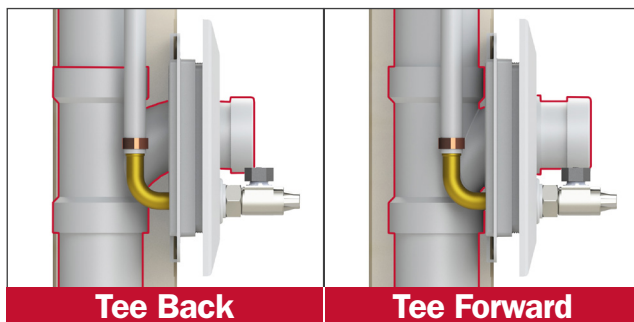

The flexible material can be installed over drain pipe or fitting hub, when tee is in FRONT or BACK of stud cavity.

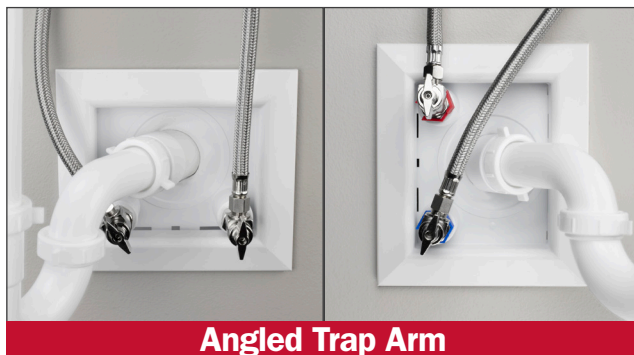


Even if the drainage arm is angled sharply, as for a corner sink, the port maintains a sealed penetration – and the panel remains flush and square, making the finish faster, easier, and cleaner.

Lavatory Application



Quickly and easily set rough-ins for any lavatory. Pre-colored white panel and color-matched frame provides a professional-looking installation on every job.




Valves Below Drainage

Recommended Installation

Although the OmniPanel™ can be installed in any position, the recommended installation is with the valves on the bottom-side of the panel - below the drainage port.

This orientation ensures the supply lines can flex out and connect easily to the fixture

Additional Features

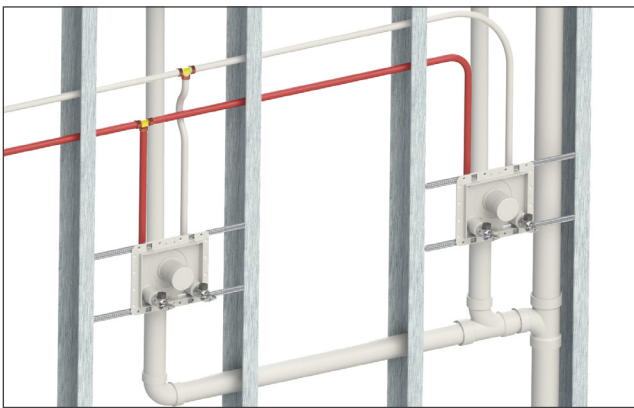

Consistent Commercial Rough-ins

The OmniPanel™ is perfect for installing multiple lavatories in series – in commercial applications or for side-by-side vanities.

Supply lines can be run from above or below. Optional water hammer arresters install at any angle



Replaceable Valve Design


Valves can be replaced with any standard 5/8" OD compression-thread valve.

Replacements can be done completely from the finish side of the wall - no need to tear into the drywall. (see website for valve replacement instructions)

Laundry Application



The OmniPanel™ is a perfect alternative to traditional laundry boxes. Laundry drain hose installs directly into a flush-facing 2" Sch. 40 elbow.

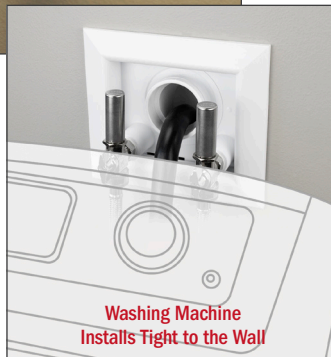

Smaller Gap Needed

The low-profile design directs laundry supply hose connections down rather than out, allowing washing machines to be set closer to the wall.



Valve Versatility

The valve outlet can be oriented in any direction, independent of the inlet elbow. For applications where multiple layers of drywall are used, and valves are set above drainage in a lavatory installation, extended replacement valves are available.



Extended replacement valves are available
688-G1CE



Frames / Extensions

Frames are designed to snap onto the plate and hold securely – Perfect for interior walls. For rated walls or where cabinets are used with multiple layers of drywall, frame extensions (698-EX) are available to accommodate any installation.



698-A11-WR

688-G1CE

698-F

698-EX

» Buying Information

ITEM NO.	DESCRIPTION	MIN. QTY.	CASE QTY.
OMNIPANEL™ WITH 3/8" OD COMP. OUTLET VALVE			
698-A11-CR	1/2" CPVC socket connection	10	10
698-A11-MR	1/2" MIP/F.Swt connection	10	10
698-A11-PR	1/2" M.Swt connection - Press/Push compatible	10	10
698-A11-WR	1/2" F1960 PEX connection	10	10
698-A11-XR	1/2" F1807 PEX connection	10	10
698-A11ACR	1/2" CPVC socket connection with arresters	10	10
698-A11AMR	1/2" MIP/F.Swt connection with arresters	10	10
698-A11APR	1/2" M.Swt connection - Press/Push compatible with arresters	10	10
698-A11AWR	1/2" F1960 PEX connection with arresters	10	10
698-A11AXR	1/2" F1807 PEX connection with arresters	10	10
OMNIPANEL™ WITH 3/4" MALE HOSE THREAD OUTLET VALVE			
698-A33-CR	1/2" CPVC socket connection	10	10
698-A33-MR	1/2" MIP/F.Swt connection	10	10
698-A33-PR	1/2" M.Swt connection - Press/Push compatible	10	10
698-A33-WR	1/2" F1960 PEX connection	10	10
698-A33-XR	1/2" F1807 PEX connection	10	10
698-A33ACR	1/2" CPVC socket connection with arresters	10	10
698-A33AMR	1/2" MIP/F.Swt connection with arresters	10	10
698-A33APR	1/2" M.Swt connection - Press/Push compatible with arresters	10	10
698-A33AWR	1/2" F1960 PEX connection with arresters	10	10
698-A33AXR	1/2" F1807 PEX connection with arresters	10	10
ACCESSORIES			
698-DC	Debris cover for OmniPanel	24	24
698-EX	Frame extension for OmniPanel	10	10
698-F	Frame only for OmniPanel	10	10
698-VC	Color clips for valve - red/blue	50	50
688-G1CE	Extended replacement valve - 5/8" OD comp. thread x 3/8" OD comp. outlet	1	10
305-RT	Grommet removal tool - use to remove valve from base plate	1	10

