


Product data sheet

Characteristics

8536SCO3V02H30S

Type S nonreversing magnetic starter, NEMA Size 1, 4 P, 110/120 VAC 50/60 Hz coil, Motor Logic overload, open

Product availability : Stock - Normally stocked in distribution facility

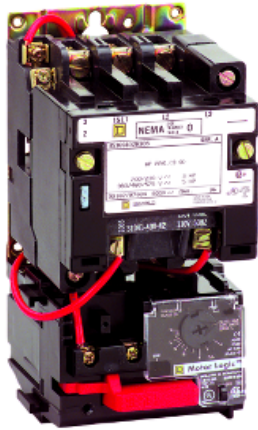

Main

Product or component type	Starter
Type	S
Control Circuit Type	Separate control circuit

Complementary

Control Circuit Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Motor starter type	Non reversing
Line Rated Current	27 A
Number of Poles	3P
Phase	3 phases
Horsepower Rating	7.5 HP 200 V AC 7.5 HP 230 V AC 10 HP 460 V AC 10 HP 575 V AC
System Voltage	600 V AC
Control Units	No control units
Thermal overload type	Solid state Motor Logic class 10/20
Electrical connection	Screw clamp terminals
NEMA size	1
Height	6.77 in (172 mm)
Depth	4.21 in (107 mm)
Width	3.5 in (89 mm)

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environment

Enclosure Type	Not rated (open device)
Product certifications	CSA NEMA UL listed

Ordering and shipping details

Category	21192 - 8502,36 SC,SD(NOT S*R,T,W)
Discount Schedule	CP1
GTIN	00785901807056
Nbr. of units in pkg.	1
Package weight(Lbs)	4
Returnability	Y
Country of origin	MX

Offer Sustainability

RoHS (date code: YYWW)	Compliant - since 1545 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
California proposition 65	WARNING: This product can expose you to chemicals including:
----- Substance 1	Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.
----- More information	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------