

Product data sheet

Specifications



Contactor, Definite Purpose, 40A, 2 pole, 7.5 HP at 230 VAC, 1 phase, 208/240 VAC 60 Hz 220 VAC 50 Hz coil, open

8910DPA42V09

Main

Product or Component Type	Definite Purpose Contactor
Line Rated Current	40 A
Number of Poles	2P
Pole contact composition	2 NO
Range of Product	DPA

Complementary

Maximum Horse Power Rating	3 hp 115 V AC, 1 phase 7.5 hp 230 V AC, 1 phase
Locked rotor rated current	240 A 277 V AC 200 A 460 V AC 160 A 575 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	208...240 V AC 60 Hz 220 V AC 50 Hz
Phase	1 phase
Electrical Connection	Box lugs Quick connect terminals

Environment

Product Certifications	UL Recognized CSA
------------------------	----------------------

Ordering and shipping details

Category	21344-8910 DPA 4_(40 AMP)
Discount Schedule	CP1B
GTIN	785901073468
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Number of Units in Package 1	1
Package 1 Height	3.20 in (8.128 cm)
Package 1 Width	4.00 in (10.16 cm)
Package 1 Length	2.60 in (6.604 cm)
Package 1 Weight	15.68 oz (444.521 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	8
Package 2 Height	7.00 in (17.78 cm)
Package 2 Width	5.50 in (13.97 cm)
Package 2 Length	8.60 in (21.844 cm)
Package 2 Weight	8.22 lb(US) (3.729 kg)


Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

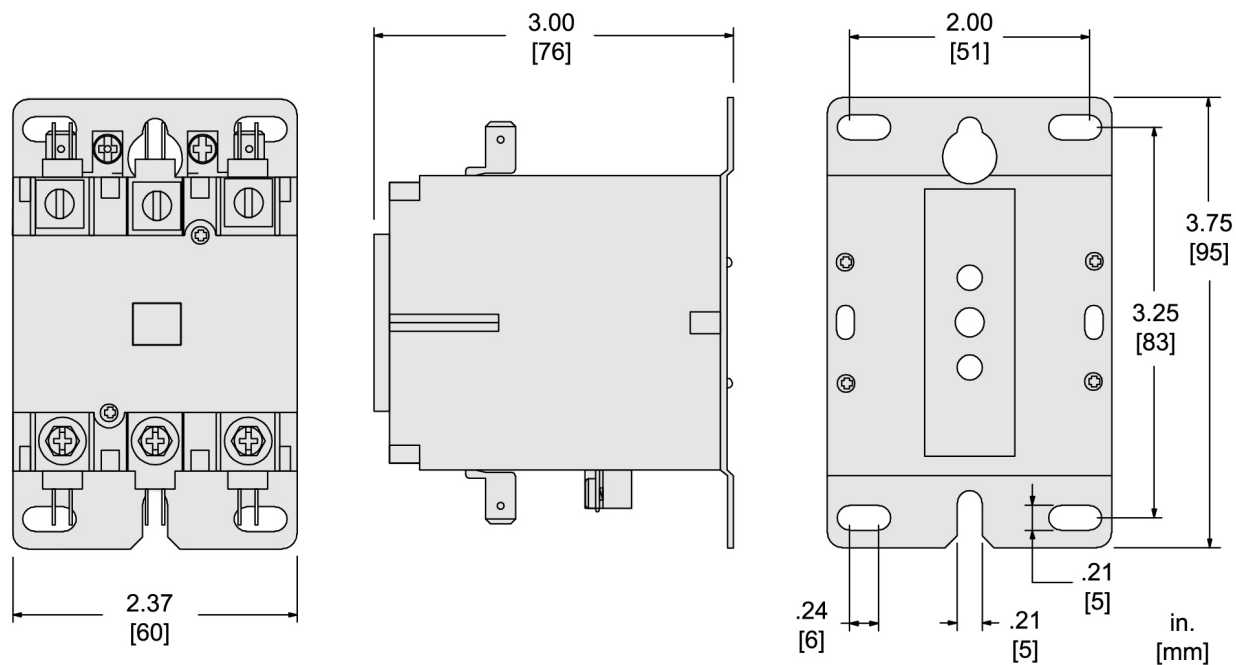

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Recommended replacement(s)