



KNOCKOUTS							
SYMBOLS	A	B	C	D	E	F	G
IN	.50	.75	1.00	1.25	1.50	2.00	2.50
MM	13	19	25	32	38	51	64

QWIK GRIP SPACES CAPABILITY							
CABLE TYPE	10-3	10-3	10-2	12-3	12-2	14-3	14-2
	FLAT	ROUND					
W1	X	Y	X	X	X	X	X
W2	Y	X	Y	Y	X	Y	X
W3	X	X	Y	Y	X	Y	X
S1	X	X	X	X	Y	X	Y
S2	X	X	X	X	X	X	Y

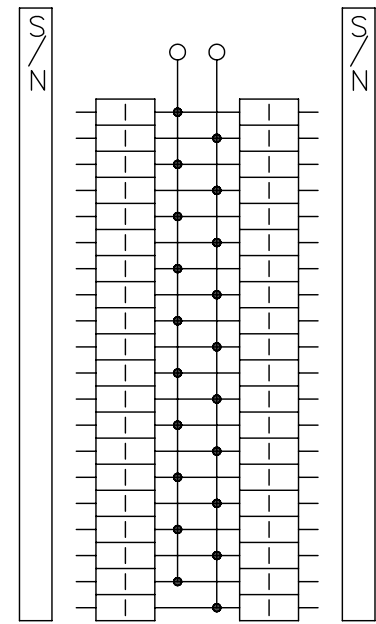

HOM4080L225PQGC

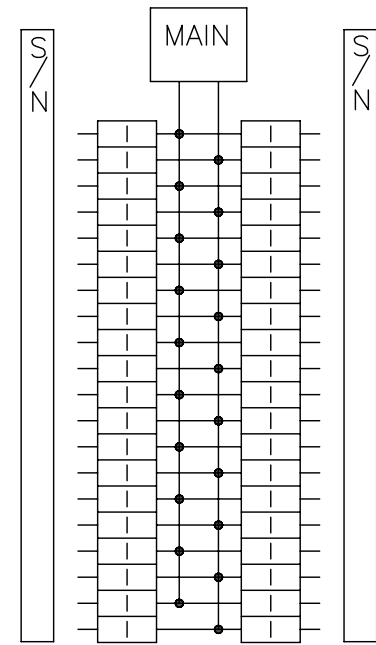

HOM4080M200PQC
HOM4080M200PQCVP

DUAL DIMENSIONS: INCHES
MILLIMETERS

CATALOG NUMBERS	MAXIMUM SYSTEM VOLTAGE	MAINS AMPERE RATING	SPACES	MAXIMUM NUMBER OF SINGLE POLE CIRCUITS	MAIN WIRE SIZE AWG	
					AL	CU
HOM4080L225PQGC	120/240 VAC 1Ø 3W	225	40	80	4 AWK-300 KCMIL	4 AWK-250 KCMIL
HOM4080M200PQC		200	40	80	4 AWK-300 KCMIL	4 AWK-250 KCMIL
HOM4080M200PQCVP		200	40	80	4 AWK-300 KCMIL	4 AWK-250 KCMIL

NOTES:
 FINISH - GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL.
 UL LISTED - FILE E-6294
 NEUTRALS - INSULATED GROUNDABLE.
 LOAD CENTERS WITH "P" IN CATALOG NUMBER INCLUDE EXTENDED NEUTRALS FOR PLUG ON NEUTRAL READY INTERIORS.

HOM4080L225PQGC
 HOM QWIK GRIP PON LC N1 ML 40/80 225A

SQUARE D
 by Schneider Electric

DWG# PWFDS-SYRS-0146
 NO.