

Product data sheet

Specifications



Mini circuit breaker, QOU, 20A, 2 pole, 120/240VAC, 10kA

QOU220

Product availability : Stock - Normally stocked in distribution facility

Price* : 92.46 USD

Main

Product or Component Type	Miniature circuit-breaker
Range of Product	QOU
Circuit breaker type	Standard
Circuit breaker application	HACR rated

Complementary

Line Rated Current	20 A
Electrical connection	Slotted box lugs, line side Slotted box lugs, load side
[Ue] rated operational voltage	120/240 V AC 120 V AC 48 V DC
Mounting Mode	Unit mount
AWG gauge	AWG 14...AWG 2 aluminium/copper
Height	4.05 in (102.87 mm)
Width	1.5 in (38.10 mm)
Depth	2.95 in (74.93 mm)
Tightening torque	45 lbf.in (5.08 N.m) (AWG 14...AWG 2)

Environment

Product Certifications	CSA IEC UL Listed
------------------------	-------------------------

Ordering and shipping details

Category	00900-QOU BREAKERS & SWITCH
Discount Schedule	DE2
GTIN	785901418689
Returnability	No
Country of origin	MX

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.60 in (9.144 cm)
Package 1 Width	4.90 in (12.446 cm)
Package 1 Length	2.10 in (5.334 cm)
Package 1 Weight	12.00 oz (340.194 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	24
Package 2 Height	4.00 in (10.16 cm)
Package 2 Width	13.90 in (35.306 cm)
Package 2 Length	21.00 in (53.34 cm)
Package 2 Weight	18.85 lb(US) (8.55 kg)


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
RoHS exemption information	Yes
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

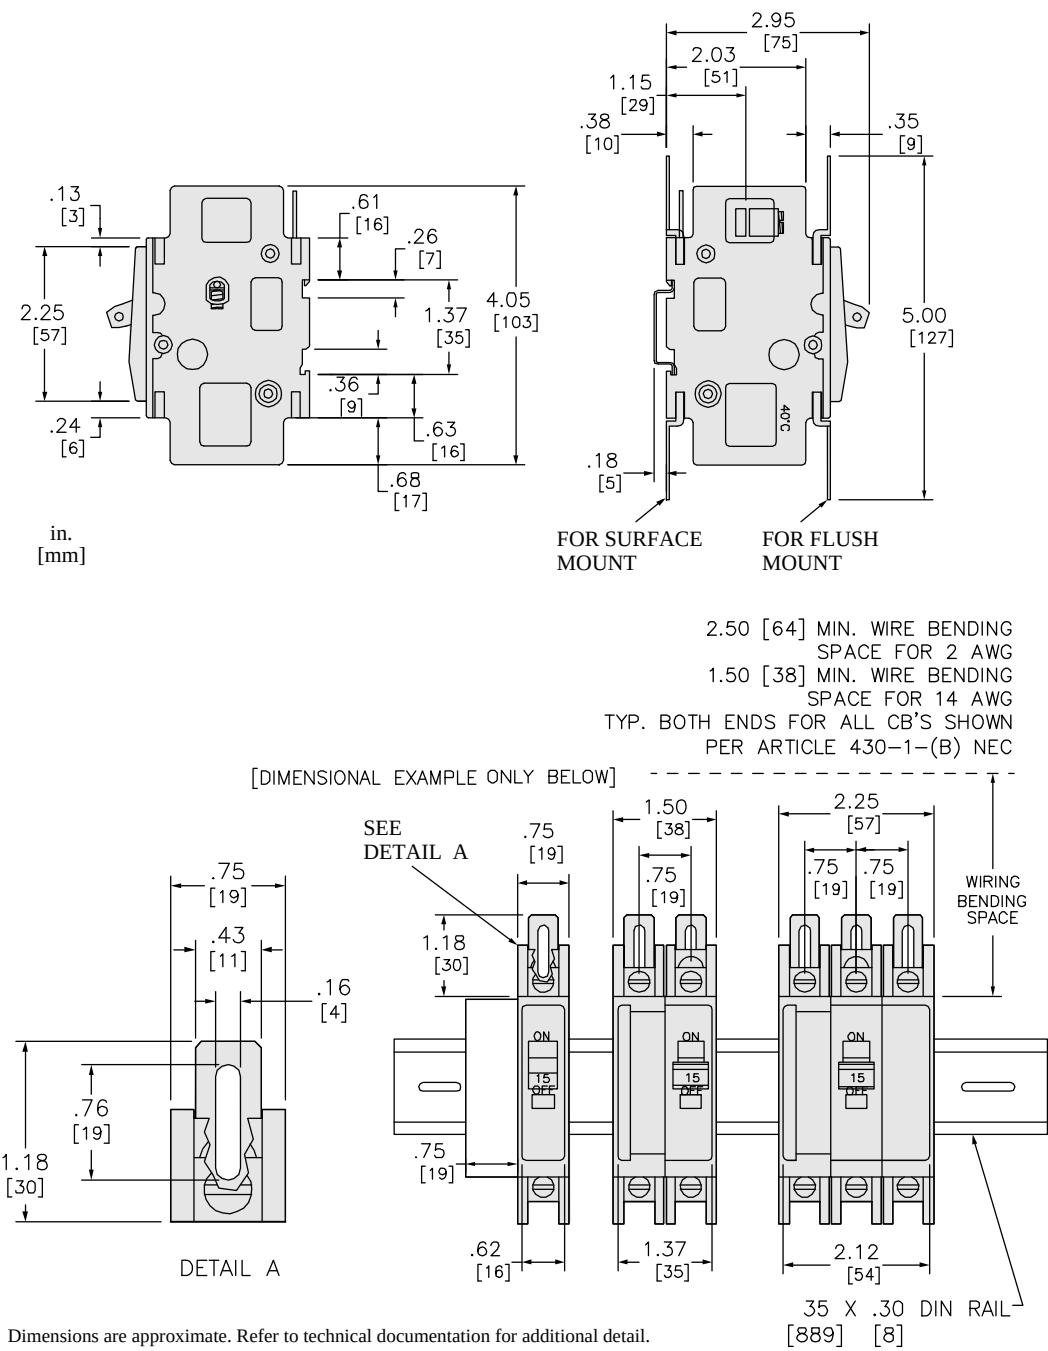

Recommended replacement(s)