

Product data sheet

Specifications



Surge protection device, Surgelogic, 36kA, 120 VAC, 1 phase, 3 wire, 25kA SCCR, NEMA 4X

SDSA1175T

Product availability : Stock - Normally stocked in distribution facility

Price* : 95.68 USD

Main

Product	Surge protection device
Range	Surgelogic

Complementary

Voltage Rating	120 V AC
MCOV	150 V
SCCR	25 kA
Surge Current	36 kA
Nominal Discharge Current	10 kA
Number of Phases	1 phase
Wiring Configuration	3-wire
Connection	Wire
Local Signalling	Status LED
Cable length	24 in (609.60 mm)
Height	2.25 in (57.15 mm)
Width	2.25 in (57.15 mm)
Depth	1.935 in (49.15 mm)

Environment

Enclosure Rating	NEMA 4X
Enclosure Material	Black Plastic
Standards	CSA C22.2 No 8 UL 1449:ed. 4

Ordering and shipping details

Category	08462-SURGE PROTECTION SDSA
Discount Schedule	DE1B
GTIN	785901984092
Returnability	No

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Country of origin	MX
-------------------	----

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.60 in (6.604 cm)
Package 1 Width	2.60 in (6.604 cm)
Package 1 Length	6.90 in (17.526 cm)
Package 1 Weight	10.56 oz (299.371 g)


Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
RoHS exemption information	Yes

Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

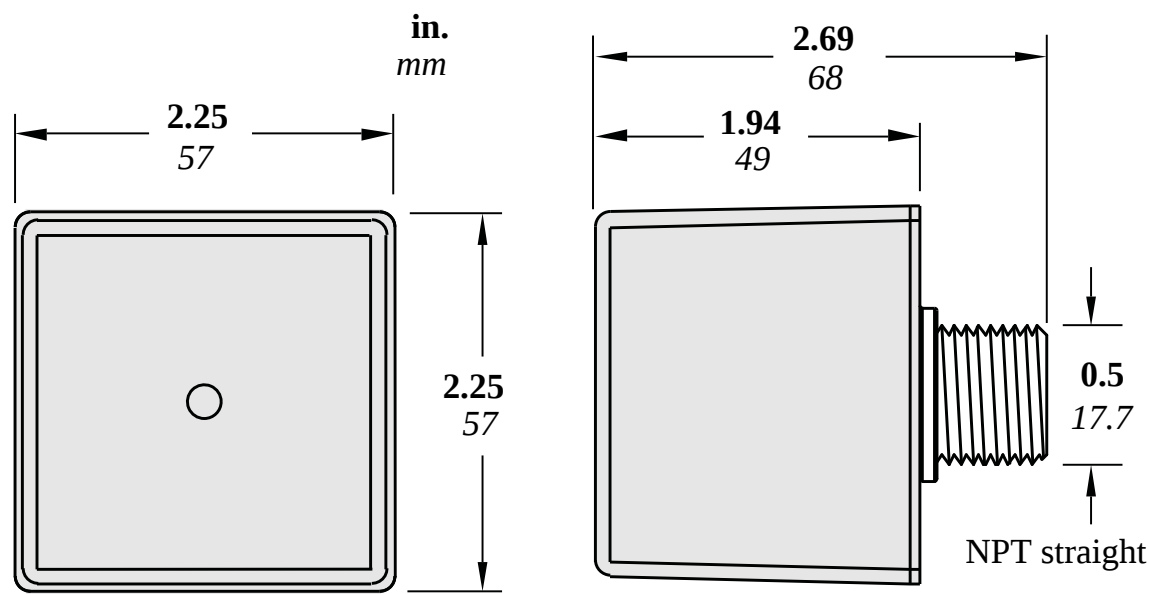

Wiring Diagram

Typical Wiring

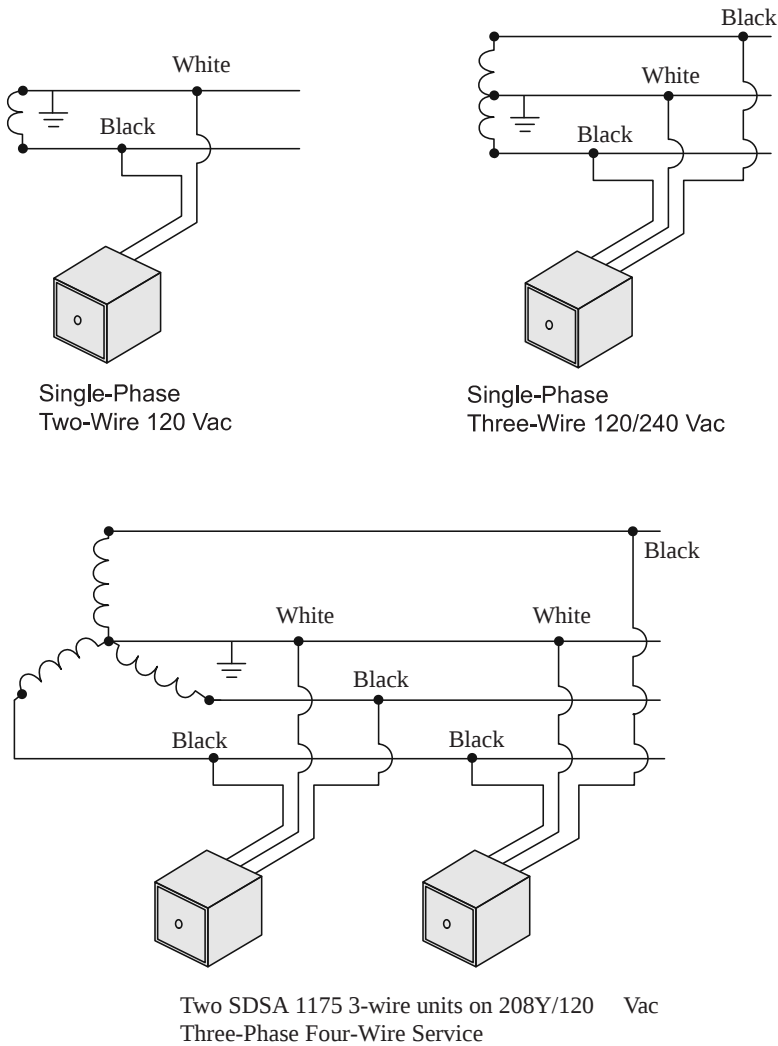

LED ON = OK (normal operation)
LED OFF = Loss of Surge Supression; Refer to Technical Documentation

Recommended replacement(s)