
CATALOG

Steel City® Conduit Systems

Commercial solutions



ABB Steel City® Conduit Systems provides cable protection system solutions primarily for commercial construction applications such as light industrial facilities, office buildings, commercial spaces and residential structures.

Steel City® Conduit Systems brings together high quality, market leading brands such as T&B® Fittings, Steel City® Fittings and T&B Liquid-tight Fittings for high

Table of contents

004–005	Introduction
006–007	General purpose commercial Liquid-Tight conduit & fittings
008–009	General purpose steel Flexible metal conduit & fittings
010–013	General purpose aluminum Flexible metal conduit & fittings
014–019	Technical Data
020–021	Index

Introduction

Steel City® Conduit Systems solutions

—
01 Commercial
Liquid-tight

—
02 Steel flexible metallic

—
03 Aluminum flex-
ible metallic

—
04 Aluminum "Heavy
Wall" Flexible Metallic

Commercial liquid-tight

Typical applications

- Light industrial and commercial installations
- Wet and oily environments
- UV resistant for outdoor use

Products:

• Conduit:

CLGE General Purpose Liquid-tight Conduit
PVC Jacket
Galvanized Steel Core - 3/8 to 4" trade sizes
Designed to UL 360 ID/OD Dimensions

Connectors:

Series LT Steel - Straight, 45° and 90°
3/8 to 4" trade sizes
NPT & Metric Threads
Meets UL 514B, CSA C22.2 No. 18.3

Steel flexible metallic

Typical applications

- "Greenfield", universal wiring applications
- Metal Raceway to NEC Article 348
- Exposed and concealed locations (348.10)


Products:

• Conduit:

CMSU Flexible Metal Conduit (FMC)
Non-jacketed, galvanized steel core
"Reduced wall" gauge
Helically wound, formed strip
3/8 to 4" trade sizes
Meets UL-1, CSA C22.2 No. 56 (See TDS)

• Connectors:

Series XC Squeeze Clamp Die-Cast Zinc
Series 200 Squeeze Clamp Steel
Series 300 Tite-Bite®
Listed for use with FMC (Flexible Metal Conduit)
Meets UL 514B, CSA C22.2 No. 18.3

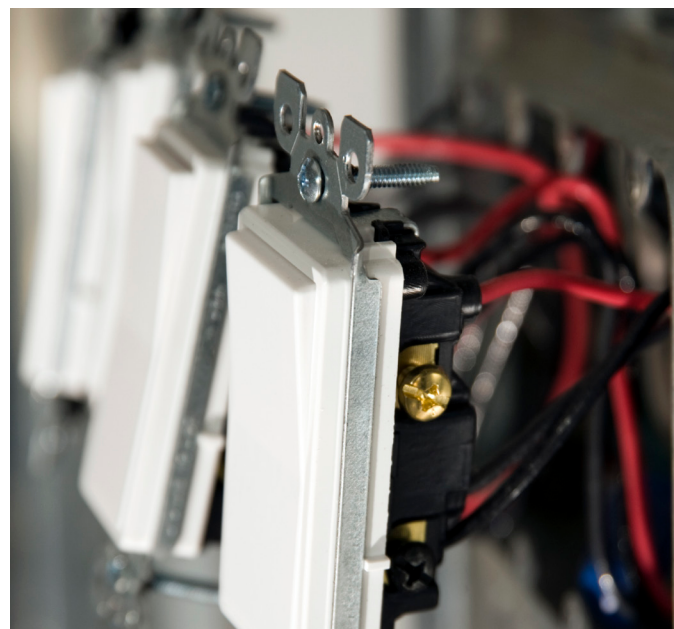

Aluminum flexible metallic

Typical applications

- "Greenfield", universal wiring applications
- Metal Raceway to NEC Article 348
- Installations where reduced weight is required

Products

- **Conduit:**
CMAU Flexible Metal Conduit (FMC)
Non-jacketed, aluminum core
"Reduced wall" gauge
Helically wound, formed strip
3/8 to 4" trade sizes
Meets UL-1, CSA C22.2 No. 56 (See TDS)
- **Connectors:**
Series XC Squeeze Clamp Die-Cast Zinc
Series 200 Squeeze Clamp Steel
Series 300 Tite-Bite®
Listed for use with FMC (Flexible Metal Conduit)
Meets UL 514B, CSA C22.2 No. 18.3

Aluminum "heavy wall" flexible metallic

Typical applications

- Meets CEC C22.1 Section 12-1000
- Intended for use as metal raceway
- Industrial and commercial installations


Products

- **Conduit:**
CMAC Flexible Metal Conduit (FMC)
Non-jacketed, aluminum core
"Heavy wall" gauge
Helically wound, formed strip
3/8 to 4" trade sizes
Meets UL-1, CSA C22.2 No. 56 (See TDS)
- **Connectors:**
Series XC Squeeze Clamp Die-Cast Zinc
Series 200 Squeeze Clamp Steel
Series 300 Tite-Bite®
Listed for use with FMC (Flexible Metal Conduit)
Meets UL 514B, CSA C22.2 No. 18.3



General purpose commercial - Liquid-tight flexible metal conduits

Type CLGE- CE Certified



Type CLGE - General Purpose

Commercial grade liquid-tight flexible metal conduits, designed for use with Steel City® liquid-tight fittings. Typically used in commercial construction and infrastructure applications.

Materials: Galvanized steel core, smooth PVC jacket

Colour: Gray (Standard)

Approvals

CE IEC/EN 61386-1, -23
DoC: EC-012-17-170



Trade Size			Coil Length										Specifications			
UL	CSA	ISO/ BS EN	Standard Carton			Small Reel			Bulk Reel			UL Bond Wire	ID Range (Nominal)		Min. Inside Bend Radius	
Inch	mm	mm	Part No.	Ft	M	Part No.	Ft	M	Part No.	Ft	M		Inch	mm	Inch	mm
3/8	12	16	CLGES01G-C	100	30	CLGES01G-K	500	150	CLGES01G-L	1,000	300	No	0.484 to 0.505 (0.493)	12.3 to 12.8 (12.5)	2.0	51
1/2	16	20	CLGES02G-C	100	30	CLGES02G-K	500	150	CLGES02G-L	1,000	300	No	0.622 to 0.642 (0.632)	15.8 to 16.3 (16.0)	2.5	64
3/4	21	25	CLGES03G-C	100	30	CLGES03G-K	500	150	CLGES03G-L	1,000	300	No	0.820 to 0.840 (0.830)	20.8 to 21.3 (21.1)	3.0	76
1	27	32	CLGES04G-C	100	30	CLGES04G-J	400	120	---	---	---	No	1.041 to 1.066 (1.053)	25.4 to 27.1 (26.8)	4.0	102
1-1/4	35	40	CLGES05G-B	50	15	CLGES05G-E	200	60	---	---	---	No	1.380 to 1.410 (1.395)	35.1 to 35.8 (35.5)	4.5	114
1-1/2	41	50	CLGES06G-B	50	15	CLGES06G-D	150	45	---	---	---	No	1.575 to 1.600 (1.587)	40.0 to 40.6 (40.3)	5.5	140
2	53	63	CLGES07G-B	50	15	CLGES07G-C	100	30	---	---	---	No	2.020 to 2.045 (2.032)	51.3 to 51.9 (51.6)	7.0	178
2-1/2	63	70	CLGES08G-A	25	8	---	---	---	---	---	---	No	2.480 to 2.505 (2.492)	63.0 to 63.6 (63.3)	9.5	241
3	78	80	CLGES09G-A	25	8	---	---	---	---	---	---	No	3.070 to 3.100 (3.085)	78.0 to 78.7 (78.4)	11.5	292
4	103	100	CLGES11G-A	25	8	---	---	---	---	---	---	No	4.000 to 4.040 (4.020)	101.6 to 105.6 (102.1)	14.0	356

Note: Product must be installed with applicable national and local electrical codes

System Ingress Ratings

UL 50E "Tested"	Type 3, 3R, 4, 12, 13
NEMA 250	Type 3, 3R, 4, 12, 13
IEC/EN 60529	IP66

System Temperature Ratings

Gen	Dry: -20 to +80°C (-4 to +176°F)
	Oil: -20 to +70°C (-4 to +158°F)
	Wet: -20 to +60°C (-4 to +140°F)
IEC/CE	Gen: -15 to +60°C (+5 to +140°F)


For more information see
Technical Data Sheet TDS000016.
For download on our website.
Please see also page 24
for more information.

General purpose commercial - Liquid-tight fittings

Series LT



Approvals



Steel City® Liquid-Tight Fittings

				Series LT, Steel							Series LT, Die-Cast Zinc			
Trade Size				Type	Non-Insulated			Insulated			Non-Insulated		Insulated	
UL Inch	CSA mm	ISO/ BS EN mm		Std. Thread	Straight Part No.	45° Part No.	90° Part No.	Straight Part No.	45° Part No.	90° Part No.	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.
3/8	12	16	NPT	1/2"	LT38-SC	LT438-SC	LT938-SC	LT38T-SC	LT438T-SC	LT938T-SC	LT-200	LT-290	LT-800	LT-890
			Metric	M20	LT16M20-SC	LT416M20-SC	LT916M20-SC	LT16M20T-SC	LT416M20T-SC	LT916M20T-SC	---	---	---	---
1/2	16	20	NPT	1/2"	LT50-SC	LT450-SC	LT950-SC	LT50T-SC	LT450T-SC	LT950T-SC	LT-201	LT-291	LT-801	LT-891
			Metric	M20	LT20M20-SC	LT420M20-SC	LT920M20-SC	LT20M20T-SC	LT420M20T-SC	LT920M20T-SC	---	---	---	---
3/4	21	25	NPT	3/4"	LT75-SC	LT475-SC	LT975-SC	LT75T-SC	LT475T-SC	LT975T-SC	LT-202	LT-292	LT-802	LT-892
			Metric	M25	LT25M25-SC	LT425M25-SC	LT925M25-SC	LT25M25T-SC	LT425M25T-SC	LT925M25T-SC	---	---	---	---
1	27	32	NPT	1"	LT100-SC	LT4100-SC	LT9100-SC	LT100T-SC	LT4100T-SC	LT9100T-SC	LT-203	LT-293	LT-803	LT-893
			Metric	M32	LT32M32-SC	LT432M32-SC	LT932M32-SC	LT32M32T-SC	LT432M32T-SC	LT932M32T-SC	---	---	---	---
1-1/4	35	40	NPT	1-1/4"	LT125-SC	LT4125-SC	LT9125-SC	LT125T-SC	LT4125T-SC	LT9125T-SC	LT-204	LT-294	LT-804	LT-894
			Metric	M40	LT40M40-SC	LT440M40-SC	LT940M40-SC	LT40M40T-SC	LT440M40T-SC	LT940M40T-SC	---	---	---	---
1-1/2	41	50	NPT	1-1/2"	LT150-SC	LT4150-SC	LT9150-SC	LT150T-SC	LT4150T-SC	LT9150T-SC	LT-205	LT-295	LT-805	LT-895
			Metric	M50	LT50M50-SC	LT450M50-SC	LT950M50-SC	LT50M50T-SC	LT450M50T-SC	LT950M50T-SC	---	---	---	---
2	53	63	NPT	2"	LT200-SC	LT4200-SC	LT9200-SC	LT200T-SC	LT4200T-SC	LT9200T-SC	LT-206	LT-296	LT-806	LT-896
			Metric	M63	LT63M63-SC	LT463M63-SC	LT963M63-SC	LT63M63T-SC	LT463M63T-SC	LT963M63T-SC	---	---	---	---
2-1/2	63	70	NPT	2-1/2"	LT250-SC	LT4250-SC	LT9250-SC	LT250T-SC	LT4250T-SC	LT9250T-SC	LT-207	LT-297	LT-807	LT-897
			Metric	---	---	---	---	---	---	---	---	---	---	---
3	78	80	NPT	3"	LT300-SC	LT4300-SC	LT9300-SC	LT300T-SC	LT4300T-SC	LT9300T-SC	LT-208	LT-298	LT-808	---
			Metric	---	---	---	---	---	---	---	---	---	---	---
4	103	100	NPT	4"	LT400-SC	LT4400-SC	LT9400-SC	LT400T-SC	LT4400T-SC	LT9400T-SC	LT-210	LT-2910	LT-810	---
			Metric	--	---	---	---	---	---	---	---	---	---	---

Sealing O-Rings - Die-cast Zinc

Trade Size	Part No.
3/8"	SR 101
1/2"	SR 102
3/4"	SR 103
1"	SR 104
1-1/4"	SR 105
1-1/2"	SR 106

General purpose steel - Flexible metal conduits

Type CMSU - UL Listed



Type CMSU - General Purpose Reduced Wall Steel

Commercial grade liquid-tight flexible metal conduits, designed for use with Steel City® liquid-tight fittings. Typically used in "Greenfield" commercial construction and infrastructure applications.

Materials: Reduced wall galvanized steel core, non-jacketed

Colour: Metallic

Approvals



UL1
File No. E484989
(excludes 4")



CSA C 22.2, No. 56
File No.: LR-72635
(3/8 & 7/16 Size Only)



IEC EN 61386-1, -23
EU DoC: EC-012-17-173



Steel City® Flexible Metal Conduits

Trade Size			Coil Length										Specifications			
UL	CSA	ISO/ BS EN	Standard Carton			Small Reel			Bulk Reel			UL Bond Wire	ID Range (Nominal)		Min. Inside Bend Radius	
Inch	mm	mm	Part No.	Ft	M	Part No.	Ft	M	Part No.	Ft	M		Inch	mm	Inch	mm
3/8	12	16	CMSUS01M-C	100	30	---	---	---	CMSUS01M-L	1,000	300	No	0.375 to 0.393 (0.384)	9.5 to 10.0 (9.75)	2.0	51
1/2	16	20	CMSUS02M-C	100	30	---	---	---	CMSUS02M-L	1,000	300	No	0.625 to 0.645 (0.635)	15.9 to 16.4 (16.2)	3.0	76
3/4	21	25	CMSUS03M-C	100	30	CMSUS03M-K	500	150	---	---	---	No	0.815 to 0.825 (0.825)	20.6 to 21.2 (20.9)	4.0	10
1	27	32	CMSUS04M-B	50	15	CMSUS04M-J	400	120	---	---	---	No	1.000 to 1.040 (1.020)	25.4 to 26.1 (25.8)	5.0	127
1-1/4	35	40	CMSUS05M-B	50	15	CMSUS05M-J	400	120	---	---	---	No	1.250 to 1.300 (1.275)	31.8 to 33.0 (32.4)	6.2	157
1-1/2	41	50	CMSUS06M-A	25	8	CMSUS06M-H	300	90	---	---	---	No	1.500 to 1.575 (1.538)	38.1 to 40.0 (39.0)	7.5	191
2	53	63	CMSUS07M-A	25	8	CMSUS07M-D	150	45	---	---	---	No	2.000 to 2.080 (2.040)	50.8 to 52.8 (51.8)	10.0	254
2-1/2	63	70	CMSUS08M-A	25	8	---	---	---	---	---	---	No	2.500 to 2.700 (2.600)	63.5 to 68.5 (66.0)	12.5	318
3	78	80	CMSUS09M-A	25	8	---	---	---	---	---	---	No	3.000 to 3.200 (3.100)	76.2 to 81.3 (78.7)	15.0	381
4	103	100	CMSUS11M-A	25	8	---	---	---	---	---	---	No	4.000 to 4.200 (4.100)	106.7 to 110.7 (108.7)	20.0	508

Note: Product must be installed in accordance with applicable national and local electrical codes

For more information see
Technical Data Sheet TDS000019.
For download on our website.
Please see also page 24
for more information.

Flexible metal conduit connectors

Series XC, 200 & 300



Approvals



UL 514 B
File No.: E1383, E-17909,
E23018



CSA C22.2, No. 18
File No. LR-12798,
LR-18130M57



UL 514 B
File No.: E23018



CSA C22.2, No. 18
File No. LR-2884



UL 514B
File No.: 23018



CSA 22.2, No. 18
File No.: LR-2884



Steel City® Connectors								T&B® Connectors			
Series XC Squeeze Type								Series 300 Squeeze Type			
Die-Cast Zinc								Steel/Malleable Iron			
Trade Size		Type		Non-Insulated		Insulated		Non-Insulated		Insulated	
UL Inch	CSA mm	ISO/ BS EN mm	Std. Thread	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.
3/8	12	16	NPS 1/2"	XC-269	XC-290	---	XC-890	301-TB	321-TB	3110-TB	3130-TB
1/2	16	20	NPS 1/2"	XC-270	XC-291	XC-870	XC-891	302-TB	323	3112	3132
3/4	21	25	NPS 3/4"	XC-272	XC-292	XC-872	XC-892	304	325	3115	3135
1	27	32	NPS 1"	XC-273	XC-293	XC-873	XC-893	306	326-TB	3117	3137
1-1/4	35	40	NPS 1-1/4"	XC-274	XC-294	XC-874	XC-894	308	327-TB	3118	3138
1-1/2	41	50	NPS 1-1/2"	XC-275	XC-295	XC-875	XC-895	310	328	3119	3139
2	53	63	NPS 2"	XC-276	XC-296	XC-876	XC-896	312	329	3120	3140
2-1/2	63	70	NPS 2-1/2"	XC-277	XC-297	XC-877	XC-897	314	330-TB	3121	3141
3	78	80	NPS 3"	XC-278	XC-298	XC-878	XC-898	316	331	3122	3142
4	103	100	NPS 4"	XC-2710	XC-2910	XC-8710	XC-8910	320	3144-TB	3124	3144-TB

Series 300 Tite-Bite Connectors

T&B® Fittings								
Series 300/3100 Tite-Bite®								
Steel/Malleable Iron								
Trade Size			Type		Non-Insulated		Insulated	
UL Inch	CSA mm	ISO/BS EN mm	Std.	Thread	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.
3/8	12	16	NPS	1/2"	301-TB	321-TB	3110-TB	3130-TB
1/2	16	20	NPS	1/2"	302-TB	323	3112	3132
3/4	21	25	NPS	3/4"	304	325	3115	3135
1	27	32	NPS	1"	306	326-TB	3117	3137
1-1/4	35	40	NPS	1-1/4"	308	327-TB	3118	3138
1-1/2	41	50	NPS	1-1/2"	310	328	3119	3139
2	53	63	NPS	2"	312	329	3120	3140
2-1/2	63	70	NPS	2-1/2"	314	330-TB	3121	3141
3	78	80	NPS	3"	316	331	3122	3142
4	103	100	NPS	4"	320	3144-TB	3124	3144-TB

General purpose aluminum - Flexible metal conduits

Type CMAU - UL Listed



Type CMAU - General Purpose Reduced Wall Aluminum

Commercial grade Aluminum flexible metal conduits, designed for use with Steel City® fittings. Typically used in "Greenfield" commercial construction and infrastructure applications.

Materials: Reduced wall aluminum core, non-jacketed

Colour: Metallic

Approvals



UL1
File No.: E484989
(excludes 7/16" size)



IEC EN 61386-1, -23
EU DoC: EC-012-17-174



CSA C22.2, No. 56
File No.: LR-72635
(3/8 & 7/16" only)



Steel City® Flexible Metal Conduits

Trade Size			Coil Length										Specifications			
UL	CSA	ISO/ BS EN	Standard Carton			Small Reel			Bulk Reel			UL Bond Wire	ID Range (Nominal)		Min. Inside Bend Radius	
Inch	mm	mm	Part No.	Ft	M	Part No.	Ft	M	Part No.	Ft	M		Inch	mm	Inch	mm
3/8	12	16	CMAUS01M-C	100	30	---	---	---	CMAUS01M-L	1,000	300	No	0.375 to 0.393 (0.384)	9.5 to 10.0 (9.75)	2.0	51
7/16	14	18	CMAUS14M-C	100	30	---	---	---	CMAUS14M-L	1,000	300	No	0.437 to 0.457 (0.447)	11.1 to 11.5 (9.75)	2.3	57
1/2	16	20	CMAUS02M-C	100	30	---	---	---	CMAUS02M-L	1,000	300	No	0.625 to 0.645 (0.635)	15.9 to 16.4 (16.2)	3.0	76
3/4	21	25	CMAUS03M-C	100	30	CMAUS03M-K	500	150	---	---	---	No	0.815 to 0.825 (0.825)	20.6 to 21.2 (20.9)	4.0	102
1	27	32	CMAUS04M-B	50	15	CMAUS04M-J	400	120	---	---	---	No	1.000 to 1.040 (1.020)	25.4 to 26.1 (25.8)	5.0	127
1-1/4	35	40	CMAUS05M-B	50	15	CMAUS05M-J	400	120	---	---	---	No	1.250 to 1.300 (1.275)	31.8 to 33.0 (32.4)	6.2	157
1-1/2	41	50	CMAUS06M-A	25	8	CMAUS06M-H	300	90	---	---	---	No	1.500 to 1.575 (1.538)	38.1 to 40.0 (39.0)	7.5	191
2	53	63	CMAUS07M-A	25	8	CMAUS07M-D	150	45	---	---	---	No	2.000 to 2.080 (2.040)	50.8 to 52.8 (51.8)	10.0	254
2-1/2	63	70	CMAUS08M-A	25	8	---	---	---	---	---	---	No	2.500 to 2.700 (2.600)	63.5 to 68.5 (66.0)	12.5	318
3	78	80	CMAUS09M-A	25	8	---	---	---	---	---	---	No	3.000 to 3.200 (3.100)	76.2 to 81.3 (78.7)	15.0	381
4	103	100	CMAUS11M-A	25	8	---	---	---	---	---	---	No	4.000 to 4.200 (4.100)	106.7 to 110.7 (108.7)	20.0	508

Note: Product must be installed in accordance with applicable national and local electrical codes

For more information see
Technical Data Sheet TDS000018.
For download on our website.
Please see also page 24 for more
information.

Flexible metal conduit connectors

Series XC, 200 & 300



Approvals



UL 514 B
File No.: E1383, E-17909,
E23018



CSA C22.2, No. 18
File No. LR-12798,
LR-18130M57



UL 514 B
File No.: E23018



CSA C22.2, No. 18
File No. LR-2884



UL 514B
File No.: 23018



CSA 22.2, No. 18
File No.: LR-2884



Steel City® Connectors								T&B® Connectors			
Series XC Squeeze Type								Series 300 Squeeze Type			
Die-Cast Zinc								Steel/Malleable Iron			
Trade Size		Type		Non-Insulated		Insulated		Non-Insulated		Insulated	
UL Inch	CSA mm	ISO/ BS EN mm	Std. Thread	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.
3/8	12	16	NPS 1/2"	XC-269	XC-290	---	XC-890	301-TB	321-TB	3110-TB	3130-TB
1/2	16	20	NPS 1/2"	XC-270	XC-291	XC-870	XC-891	302-TB	323	3112	3132
3/4	21	25	NPS 3/4"	XC-272	XC-292	XC-872	XC-892	304	325	3115	3135
1	27	32	NPS 1"	XC-273	XC-293	XC-873	XC-893	306	326-TB	3117	3137
1-1/4	35	40	NPS 1-1/4"	XC-274	XC-294	XC-874	XC-894	308	327-TB	3118	3138
1-1/2	41	50	NPS 1-1/2"	XC-275	XC-295	XC-875	XC-895	310	328	3119	3139
2	53	63	NPS 2"	XC-276	XC-296	XC-876	XC-896	312	329	3120	3140
2-1/2	63	70	NPS 2-1/2"	XC-277	XC-297	XC-877	XC-897	314	330-TB	3121	3141
3	78	80	NPS 3"	XC-278	XC-298	XC-878	XC-898	316	331	3122	3142
4	103	100	NPS 4"	XC-2710	XC-2910	XC-8710	XC-8910	320	3144-TB	3124	3144-TB

Series 300 Tite-Bite Connectors

T&B® Fittings								
Series 300/3100 Tite-Bite®								
Steel/Malleable Iron								
Trade Size			Type		Non-Insulated		Insulated	
UL Inch	CSA mm	ISO/BS EN mm	Std.	Thread	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.
3/8	12	16	NPS	1/2"	301-TB	321-TB	3110-TB	3130-TB
1/2	16	20	NPS	1/2"	302-TB	323	3112	3132
3/4	21	25	NPS	3/4"	304	325	3115	3135
1	27	32	NPS	1"	306	326-TB	3117	3137
1-1/4	35	40	NPS	1-1/4"	308	327-TB	3118	3138
1-1/2	41	50	NPS	1-1/2"	310	328	3119	3139
2	53	63	NPS	2"	312	329	3120	3140
2-1/2	63	70	NPS	2-1/2"	314	330-TB	3121	3141
3	78	80	NPS	3"	316	331	3122	3142
4	103	100	NPS	4"	320	3144-TB	3124	3144-TB

General purpose aluminum - Flexible metal conduits

Type CMAC - CSA Certified



Type CMAC - General Purpose Heavy Wall Aluminum

Commercial grade Aluminum flexible metal conduits, designed for use with Steel City® fittings. Typically used in "Greenfield" commercial construction and infrastructure applications.

Materials: Heavy wall aluminum core, non-jacketed

Colour: Metallic

Approvals



CSA C22.2, No. 56
File No.: LR-72635



UL 1
File No.: E484989



IEC EN 61386-1, -23
EU DoC: EC-012-17-172



Steel City® Flexible Metal Conduits

Trade Size			Coil Length										Specifications			
UL	CSA	ISO/ BS EN	Standard Carton			Small Reel			Bulk Reel			UL Bond Wire	ID Range (Nominal)		Min. Inside Bend Radius	
Inch	mm	mm	Part No.	Ft	M	Part No.	Ft	M	Part No.	Ft	M		Inch	mm	Inch	mm
3/8	12	16	CMACS01M-C	100	30	CMACS01M-K	500	150	CMACS01M-L	1,000	300	No	0.375 to 0.393 (0.384)	9.5 to 10.0 (9.75)	2.0	51
7/16	14	18	CMACS14M-C	100	30	CMACS14M-K	500	150	CMACS14M-L	1,000	300	No	0.437 to 0.457 (0.447)	11.1 to 11.5 (9.75)	2.3	57
1/2	16	20	CMACS02M-C	100	30	CMACS02M-K	500	150	CMACS02M-L	1,000	300	No	0.625 to 0.645 (0.635)	15.9 to 16.4 (16.2)	3.0	76
3/4	21	25	CMACS03M-C	100	30	CMACS03M-K	500	150	CMACS03M-L	1,000	300	No	0.815 to 0.825 (0.825)	20.6 to 21.2 (20.9)	4.0	102
1	27	32	CMACS04M-B	50	15	CMACS04M-J	400	120	---	---	---	No	1.000 to 1.040 (1.020)	25.4 to 26.1 (25.8)	5.0	127
1-1/4	35	40	CMACS05M-B	50	15	CMACS05M-J	400	120	---	---	---	No	1.250 to 1.300 (1.275)	31.8 to 33.0 (32.4)	6.2	157
1-1/2	41	50	CMACS06M-A	25	8	CMACS06M-H	300	90	---	---	---	No	1.500 to 1.575 (1.538)	38.1 to 40.0 (39.0)	7.5	191
2	53	63	CMACS07M-A	25	8	CMACS07M-D	150	45	---	---	---	No	2.000 to 2.080 (2.040)	50.8 to 52.8 (51.8)	10.0	254
2-1/2	63	70	CMACS08M-A	25	8	---	---	---	---	---	---	No	2.500 to 2.700 (2.600)	63.5 to 68.5 (66.0)	12.5	318
3	78	80	CMACS09M-A	25	8	---	---	---	---	---	---	No	3.000 to 3.200 (3.100)	76.2 to 81.3 (78.7)	15.0	381
4	103	100	CMACS11M-A	25	8	---	---	---	---	---	---	No	4.000 to 4.200 (4.100)	106.7 to 110.7 (108.7)	20	508

Note: Product must be installed in accordance with applicable national and local electrical codes

For more information see
Technical Data Sheet TDS000018.
For download on our website.
Please see also page 24
for more information.

Flexible metal conduit connectors

Series XC, 200 & 300



Approvals



UL 514 B
File No.: E1383, E-17909,
E23018



CSA C22.2, No. 18
File No. LR-12798,
LR-18130M57



UL 514 B
File No.: E23018



CSA C22.2, No. 18
File No. LR-2884



UL 514B
File No.: 23018



CSA 22.2, No. 18
File No.: LR-2884



Steel City® Connectors								T&B® Connectors				
Series XC Squeeze Type								Series 300 Squeeze Type				
Die-Cast Zinc								Steel/Malleable Iron				
Trade Size			Type		Non-Insulated		Insulated		Non-Insulated		Insulated	
UL Inch	CSA mm	ISO/ BS EN mm	Std.	Thread	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.
3/8	12	16	NPS	1/2"	XC-269	XC-290	---	XC-890	301-TB	321-TB	3110-TB	3130-TB
1/2	16	20	NPS	1/2"	XC-270	XC-291	XC-870	XC-891	302-TB	323	3112	3132
3/4	21	25	NPS	3/4"	XC-272	XC-292	XC-872	XC-892	304	325	3115	3135
1	27	32	NPS	1"	XC-273	XC-293	XC-873	XC-893	306	326-TB	3117	3137
1-1/4	35	40	NPS	1-1/4"	XC-274	XC-294	XC-874	XC-894	308	327-TB	3118	3138
1-1/2	41	50	NPS	1-1/2"	XC-275	XC-295	XC-875	XC-895	310	328	3119	3139
2	53	63	NPS	2"	XC-276	XC-296	XC-876	XC-896	312	329	3120	3140
2-1/2	63	70	NPS	2-1/2"	XC-277	XC-297	XC-877	XC-897	314	330-TB	3121	3141
3	78	80	NPS	3"	XC-278	XC-298	XC-878	XC-898	316	331	3122	3142
4	103	100	NPS	4"	XC-2710	XC-2910	XC-8710	XC-8910	320	3144-TB	3124	3144-TB


Series 300 Tite-Bite Connectors

T&B® Fittings									
Series 300/3100 Tite-Bite®									
Steel/Malleable Iron									
Trade Size			Type		Non-Insulated		Insulated		
UL Inch	CSA mm	ISO/BS EN mm	Std.	Thread	Straight Part No.	90° Part No.	Straight Part No.	90° Part No.	
3/8	12	16	NPS	1/2"	301-TB	321-TB	3110-TB	3130-TB	
1/2	16	20	NPS	1/2"	302-TB	323	3112	3132	
3/4	21	25	NPS	3/4"	304	325	3115	3135	
1	27	32	NPS	1"	306	326-TB	3117	3137	
1-1/4	35	40	NPS	1-1/4"	308	327-TB	3118	3138	
1-1/2	41	50	NPS	1-1/2"	310	328	3119	3139	
2	53	63	NPS	2"	312	329	3120	3140	
2-1/2	63	70	NPS	2-1/2"	314	330-TB	3121	3141	
3	78	80	NPS	3"	316	331	3122	3142	
4	103	100	NPS	4"	320	3144-TB	3124	3144-TB	

Technical data

Approximate dimensions


One-hole straps

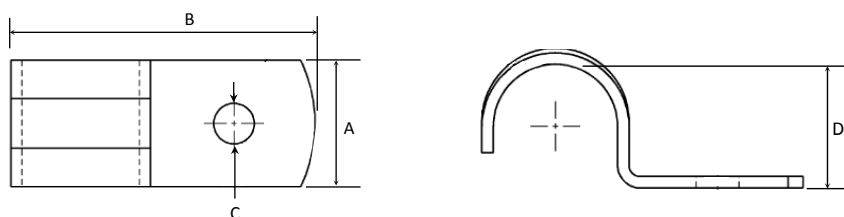

One-hole straps – steel/zinc plated

Cat. No.	Conduit Size			Screw Size (in.)	Dimensions (in.)				Dimensions (mm.)				Std. Ctn.
	Inches	Metric	ISO BS EN		A	B	C	D	A	B	C	D	
HS-100-SC	3/8	12mm	16mm	10	3/4	1-3/4	22/83	5/8	19.0	44.5	6.7	15.1	1,000
HS-101	1/2	16mm	20mm	1/4	1	1-15/16	9/32	13/16	25.4	49.2	7.1	20.6	500
HS-102	3/4	21mm	25mm	1/4	1	2-5/16	9/32	1-1/32	25.4	58.7	7.1	26.2	500
HS-103	1	27mm	32mm	1/4	1	2-13/32	9/32	1-3/16	25.4	61.1	7.1	30.9	250
HS-104	1-1/4	35mm	40mm	5/16	1	3-3/32	11/32	1-9/16	25.4	78.6	8.7	39.7	100
HS-105	1-1/2	41mm	50mm	3/8	1-3/16	3-13/32	13/32	1-3/4	30.2	86.5	10.3	44.9	100
HS-106	2	53mm	63mm	3/8	1-3/16	3-27/32	13/32	2-3/16	30.2	97.6	10.3	56.0	100
HS-107	2-1/2	63mm	70mm	7/16	1-1/4	5-1/16	22/47	2-11/16	31.8	128.6	11.9	68.3	25
HS-108	3	78mm	80mm	1/2	1-3/8	5-7/8	17/32	3-5/16	34.9	149.2	13.5	84.5	25
HS-110	4	103mm	100mm	1/2	1-3/8	6-7/8	17/32	4-3/8	34.9	174.6	13.5	111.1	10

Two-hole straps

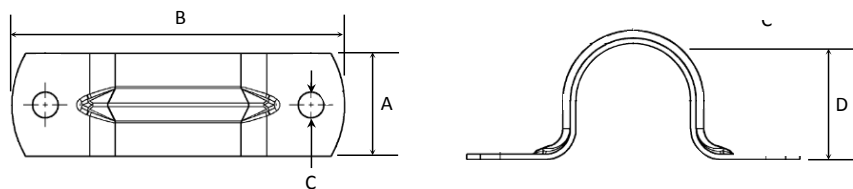

Two-hole straps – steel/zinc plated



Cat. No.	Conduit Size			Screw Size (in.)	Dimensions (in.)				Dimensions (mm.)				Std. Ctn.
	Inches	Metric	ISO BS EN		A	B	C	D	A	B	C	D	
HS-901	1/2	16mm	20mm	1/4	1	1-15/16	0.281	13/16	25.4	49.2	7.1	21.3	1,200
HS-902	3/4	21mm	25mm	1/4	1	2-5/16	0.281	1-1/16	25.4	58.7	7.1	26.7	900
HS-903	1	27mm	32mm	1/4	1	2-13/32	0.281	1-5/16	25.4	61.1	7.1	33.3	600
HS-904	1-1/4	35mm	40mm	5/16	1	3-3/32	0.344	1-5/8	25.4	78.6	8.7	42.2	450
HS-905	1-1/2	41mm	50mm	3/8	1-3/16	3-13/32	0.406	1-7/8	30.2	86.5	10.3	48.3	50
HS-906	2	53mm	63mm	3/8	1-3/16	3-27/32	0.406	2-3/8	30.2	97.6	10.3	60.3	150
HS-907	2-1/2	63mm	70mm	7/16	1-1/4	5-1/16	0.468	2-7/8	31.8	128.6	11.9	73.0	150
HS-908	3	78mm	80mm	1/2	1-3/8	5-7/8	0.531	3-3/8	34.9	149.2	13.5	85.9	60
HS-910	4	103mm	100mm	1/2	1-3/8	6-7/8	0.531	4-3/8	34.9	174.6	13.5	111.1	60

Technical data

Approximate dimensions

Liquid-Tight Flexible Metal Conduits (LFMC)



Liquid-Tight Flexible Metallic Conduits are all designed to UL 360 ID and OD Dimensions to insure coordinated performance with Ser. LT Liquidtight Fittings



Part No.	Trade Size			Inches				millimeters			
	UL	CSA	ISO/BS EN	Inside (ID)		Outside (OD)		Inside (ID)		Outside (OD)	
	Inches	mm	mm	Min	Max	Min	Max	Min	Max	Min	Max
CLxxS01x-*	3/8	12	16	0.484	0.504	0.690	0.710	12.3	12.8	17.5	18.0
CLxxS02x-*	1/2	16	20	0.622	0.642	0.820	0.840	15.8	16.3	20.8	21.3
CLxxS03x-*	3/4	21	25	0.820	0.840	1.030	1.050	20.8	21.3	26.2	26.7
CLxxS04x-*	1	27	32	1.041	1.066	1.290	1.315	26.4	27.1	32.8	33.4
CLGxx05x-*	1-1/4	35	40	1.380	1.410	1.630	1.660	35.1	35.8	41.4	42.2
CLxxS06x-*	1-1/2	41	50	1.575	1.600	1.865	1.900	40.0	40.6	47.4	48.3
CLxxS07x-*	2	53	63	2.020	2.045	2.340	2.375	51.3	51.9	59.4	60.3
CLxxS08x-*	2-1/2	63	70	2.480	2.505	2.840	2.875	63.0	63.6	72.1	73.0
CLxxS09x-*	3	78	80	3.070	3.100	3.460	3.500	78.0	78.7	87.9	88.8
CLxxS11x-*	4	103	100	4.000	4.040	4.460	4.500	101.6	102.6	113.3	114.3

Flexible Metal Conduits (FMC)

Flexible Metal Conduits are designed to UL 1 ID and OD Dimensions to insure coordinated performance with Ser. 200, 300 and XC Connectors






Part number	Trade size			Inches				Millimeters			
	UL	CSA	ISO BS EN	Inside (ID)		Outside (OD)		Inside (ID)		Outside (OD)	
	Inches	mm	mm	Min	Max	Min	Max	Min	Max	Min	Max
CMxxS01M-*	3/8	12	16	0.375	0.393	0.560	0.610	9.5	10.0	14.2	15.5
CMxxS02M-*	1/2	16	20	0.625	0.645	0.860	0.920	15.9	16.4	21.8	23.4
CMxxS03M-*	3/4	21	25	0.081	0.835	1.045	1.105	20.6	21.2	26.5	28.1
CMxx04M-*	1	27	32	1.000	1.040	1.300	1.380	25.4	26.4	33.0	35.1
CMxxS05M-*	1-1/4	35	40	1.250	1.300	1.550	1.630	31.8	33.0	39.4	41.4
CMxxS06M-*	1-1/2	41	50	1.500	1.575	1.850	1.950	38.1	40.0	47.0	49.5
CMxxS07M-*	2	53	63	2.000	2.080	2.350	2.454	50.8	52.8	59.7	62.3
CMxxS08M-*	2-1/2	63	70	2.500	2.700	2.860	3.060	63.5	68.2	72.6	77.7
CMxxS09M-*	3	78	80	3.000	3.200	3.360	3.560	76.2	81.3	85.3	90.4
CMxxS11M-*	4	103	100	4.000	4.200	4.360	4.560	101.6	106.7	110.7	115.8

Note: Product must be installed in accordance with applicable national and local electrical codes.

Technical data

Approximate dimensions



Series LT Commercial LT Fittings

Approximate Dimensions Straight Fittings - NPT, ISO Threads									
Trade Size				Inches			millimeters		
Inches	Metric	ISO/BS EN		A	B	C	A	B	C
	3/8	12	16	1-1/16	31/32	9/16	27.0	24.5	14.0
	1/2	16	20	1-3/16	1-3/32	9/16	29.8	27.6	14.0
	3/4	21	25	1-7/16	1-1/8	5/8	36.0	28.8	15.0
	1	27	32	1-23/32	1-1/4	21/32	43.5	31.6	17.0
	1-1/4	35	40	2-1/8	1-3/8	11/16	54.0	34.5	17.7
	1-1/2	41	50	2-13/32	1-1/2	11/16	61.0	39.3	17.7
	2	53	63	2-15/16	1-11/16	25/32	74.7	42.8	20.0
	2-1/2	63	70	3-5/8	3-1/2	1	92.0	89.8	26.0
	3	78	80	4-5/16	3-3/4	1-1/16	109.5	94.8	27.0
	4	103	100	5-1/2	3-27/32	1-3/8	140.0	97.9	30.0
45° Fittings - NPT, ISO Threads									
	3/8	12	16	1-25/32	1-1/2	9/16	45.0	38.0	14.0
	1/2	16	20	2-3/16	1-27/32	9/16	51.4	47.0	14.0
	3/4	21	25	2-1/4	2-3/32	5/8	57.0	53.0	15.0
	1	27	32	2-5/8	2-7/8	21/32	67.0	73.0	17.0
	1-1/4	35	40	3-3/16	3	11/16	81.0	76.3	17.7
	1-1/2	41	50	3-9/16	3-1/32	11/16	90.5	77.3	17.7
	2	53	63	4-1/8	3-11/16	25/32	104.6	94.0	20.0
	2-1/2	63	70	5-3/4	5-3/4	1	145.7	146.0	26.0
	3	78	80	6-7/16	6-1/16	1-1/16	163.8	154.5	27.0
	4	103	100	7-1/2	7-1/16	1-3/8	191.0	179.0	30.0
90° Fittings - NPT, ISO Threads									
	3/8	12	16	2-9/32	1-15/32	9/16	57.8	37.5	14.0
	1/2	16	20	2-3/8	1-1/2	9/16	60.1	38.5	14.0
	3/4	21	25	2-7/16	1-29/32	5/8	72.8	48.6	15.0
	1	27	32	3-5/16	2-1/4	21/32	83.7	57.0	17.0
	1-1/4	35	40	3-3/4	2-5/8	11/16	95.1	66.3	17.7
	1-1/2	41	50	4-3/8	2-13/16	11/16	111.5	71.3	17.7
	2	53	63	4-15/16	3-1/2	25/32	126.0	89.5	20.0
	2-1/2	63	70	7-3/16	5-3/16	1	182.0	131.6	26.0
	3	78	80	8	6-1/16	1-1/16	203.5	154.0	27.0
	4	103	100	9-1/16	7-1/8	1-3/8	231.0	180.0	30.0

Technical data

Approximate dimensions

Series 200 Squeeze Connectors - Steel

Approximate Dimensions Straight Connectors - NPS Threads									
Trade Size				Inches			millimeters		
Inches	Metric	ISO/BS EN		A	B	C	A	B	C
	3/8	12	16	1-1/16	7/8	13/32	27.0	23.1	10.3
	1/2	16	20	1-7/32	7/8	13/32	31.0	23.1	10.3
	3/4	21	25	1-1/4	1	7/16	31.8	25.4	11.1
	1	27	32	1-19/32	1	1/2	40.5	25.4	12.7
	1-1/4	35	40	1-7/8	1-1/16	17/32	47.6	25.5	13.5
	1-1/2	41	50	2-1/4	1-3/4	9/16	57.2	44.5	14.3
	2	53	63	2-31/32	1-15/16	11/16	75.4	49.2	17.5
	2-1/2	63	70	3-5/16	1-13/16	3/4	84.1	46.0	19.1
	3	78	80	3-13/16	2	3/4	96.8	50.8	19.1
	4	103	100	5-3/32	4-3/32	1-5/8	129.4	104.0	41.3
90° Connectors - NPS Threads									
	3/8	12	16	1-7/16	1-1/8	7/16	36.5	28.6	11.1
	1/2	16	20	1-7/8	1-7/32	15/32	47.6	31.0	11.9
	3/4	21	25	1-13/16	1-7/16	7/16	46.0	36.5	11.1
	1	27	32	2-7/16	1-13/16	9/16	57.6	46.0	14.3
	1-1/4	35	40	3	2-1/4	5/8	76.2	57.2	15.9
	1-1/2	41	50	4	2-29/32	5/8	101.6	73.8	15.9
	2	53	63	4-7/8	3-7/8	3/4	123.8	98.4	19.1
	2-1/2	63	70	7-9/16	4-11/16	1-1/32	192.1	119.1	26.2
	3	78	80	8-15/16	5-9/16	1-1/16	227.0	141.3	27.0
	4	103	100	12-3/8	7-1/8	1-9/16	314.3	181.0	39.7



Technical data

Approximate dimensions

Series 300 Tite-Bite Connectors

Straight Connectors - NPS Threads									
Trade Size				Inches			millimeters		
Inches	Metric	ISO/BS EN		A	B	C	A	B	C
3/8	12	16		1-7/16	7/16	7/16	36.5	11.1	11.1
1/2	16	20		1-25/32	1-9/32	15/32	45.2	32.5	11.9
3/4	21	25		2	1-9/32	15/32	50.8	32.5	11.9
1	27	32		2-3/8	1-7/32	17/32	60.3	31.0	13.5
1-1/4	35	40		2-3/4	1-11/32	21/32	69.9	34.1	16.7
1-1/2	41	50		3-1/8	1-7/8	3/4	79.4	47.6	19.0
2	53	63		3-3/4	1-15/16	13/16	95.3	49.2	20.6
2-1/2	63	70		4-3/8	2-3/8	7/8	111.1	60.3	22.2
3	78	80		5	2-3/8	7/8	127.0	60.3	22.2
4	103	100		5-3/4	2-1/2	1-9/32	146.0	63.5	32.5

90° Connectors - NPS Threads									
Trade Size				Inches			millimeters		
Inches	Metric	ISO/BS EN		A	B	C	A	B	C
3/8	12	16		1-19/32	1-11/32	7/16	26.0	25.7	11.1
1/2	16	20		2-5/16	1-7/8	15/32	51.1	26.3	11.9
3/4	21	25		2-1/8	2	15/32	50.9	50.8	11.9
1	27	32		2-1/8	2-21/32	1/2	50.9	51.5	12.7
1-1/4	35	40		2-7/8	3-1/8	3/4	51.7	76.3	19.1
1-1/2	41	50		4	4-3/8	13/16	101.6	102.0	20.6
2	53	63		4-7/8	5-9/16	1	102.5	153.0	25.4
2-1/2	63	70		6	5-25/32	1	152.4	153.2	25.4
3	78	80		7	6	1	177.8	147.0	25.4
4	103	100		7-1/4	6-29/32	1-1/8	178.1	147.9	28.6





Technical data

Approximate dimensions

Series XC Squeeze Connectors - Die-Cast Zinc

Straight Connectors - NPS Threads									
Trade Size				Inches			millimeters		
Inches	Metric	ISO/BS EN		A	B	C	A	B	C
3/8	12	16		1-1/16	7/8	13/32	27.0	23.1	10.3
1/2	16	20		1-7/32	7/8	13/32	31.0	23.1	10.3
3/4	21	25		1-1/4	1	7/16	31.8	25.4	11.1
1	27	32		1-19/32	1	1/2	40.5	25.4	12.7
1-1/4	35	40		1-7/8	1-1/16	17/32	47.6	25.5	13.5
1-1/2	41	50		2-1/4	1-3/4	9/16	57.2	44.5	14.3
2	53	63		2-31/32	1-15/16	11/16	75.4	49.2	17.5
2-1/2	63	70		3-5/16	1-13/16	3/4	84.1	46.0	19.1
3	78	80		3-13/16	2	3/4	96.8	50.8	19.1

90° Connectors - NPS Threads									
Trade Size				Inches			millimeters		
Inches	Metric	ISO/BS EN		A	B	C	A	B	C
3/8	12	16		1-7/16	1-1/8	7/16	36.5	28.6	11.1
1/2	16	20		1-7/8	1-7/32	15/32	47.6	31.0	11.9
3/4	21	25		1-13/16	1-7/16	7/16	46.0	36.5	11.1
1	27	32		2-7/16	1-13/16	9/16	57.6	46.0	14.3
1-1/4	35	40		3	2-1/4	5/8	76.2	57.2	15.9
1-1/2	41	50		4	2-29/32	5/8	101.6	73.8	15.9
2	53	63		4-7/8	3-7/8	3/4	123.8	98.4	19.1
2-1/2	63	70		7-9/16	4-11/16	1-1/32	192.1	119.1	26.2
3	78	80		8-15/16	5-9/16	1-1/16	227.0	141.3	27.0



Index

Order code classification

Part No.	GID Code	Page No.
301-TB	7TAA106040R0006	9
302-TB	7TAA106010R0001	9
3110-TB	7TAA106020R0002	9
3130-TB	7TAA106030R0013	9
3144-TB	7TAA106020R0012	9
321-TB	7TAA106020R0013	9
326-TB	7TAA106030R0022	9
327-TB	7TAA106030R0023	9
330-TB	7TAA106030R0026	9
CLGES01G-C	7TAA012CA0R0000	6
CLGES01G-K	7TAA012CA0R0010	6
CLGES01G-L	7TAA012CA0R0017	6
CLGES02G-C	7TAA012CA0R0001	6
CLGES02G-K	7TAA012CA0R0011	6
CLGES02G-L	7TAA012CA0R0018	6
CLGES03G-C	7TAA012CA0R0002	6
CLGES03G-K	7TAA012CA0R0012	6
CLGES03G-L	7TAA012CA0R0019	6
CLGES04G-C	7TAA012CA0R0003	6
CLGES04G-J	7TAA012CA0R0013	6
CLGES05G-B	7TAA012CA0R0004	6
CLGES05G-E	7TAA012CA0R0014	6
CLGES06G-B	7TAA012CA0R0005	6
CLGES06G-D	7TAA012CA0R0015	6
CLGES07G-B	7TAA012CA0R0006	6
CLGES07G-C	7TAA012CA0R0016	6
CLGES08G-A	7TAA012CA0R0007	6
CLGES09G-A	7TAA012CA0R0008	6
CLGES11G-A	7TAA012CA0R0009	6
CMACS01M-C	7TAA012CE0R0000	12
CMACS01M-K	7TAA012CE0R0011	12
CMACS01M-L	7TAA012CE0R0019	12
CMACS02M-C	7TAA012CE0R0002	12
CMACS02M-K	7TAA012CE0R0013	12
CMACS02M-L	7TAA012CE0R0021	12
CMACS03M-C	7TAA012CE0R0003	12
CMACS03M-K	7TAA012CE0R0014	12
CMACS03M-L	7TAA012CE0R0022	12
CMACS04M-B	7TAA012CE0R0004	12
CMACS04M-J	7TAA012CE0R0015	12
CMACS05M-B	7TAA012CE0R0005	12
CMACS05M-J	7TAA012CE0R0016	12
CMACS06M-A	7TAA012CE0R0006	12
CMACS06M-H	7TAA012CE0R0017	12
CMACS07M-A	7TAA012CE0R0007	12
CMACS07M-D	7TAA012CE0R0018	12
CMACS08M-A	7TAA012CE0R0008	12
CMACS09M-A	7TAA012CE0R0009	12
CMACS11M-A	7TAA012CE0R0010	12

Part No.	GID Code	Page No.
CMACS14M-C	7TAA012CE0R0001	12
CMACS14M-K	7TAA012CE0R0012	12
CMACS14M-L	7TAA012CE0R0020	12
CMAUS01M-C	7TAA012CD0R0000	10
CMAUS01M-L	7TAA012CD0R0011	10
CMAUS02M-C	7TAA012CD0R0002	10
CMAUS02M-L	7TAA012CD0R0013	10
CMAUS03M-C	7TAA012CD0R0003	10
CMAUS03M-K	7TAA012CD0R0014	10
CMAUS04M-B	7TAA012CD0R0004	10
CMAUS04M-J	7TAA012CD0R0015	10
CMAUS05M-B	7TAA012CD0R0005	10
CMAUS05M-J	7TAA012CD0R0016	10
CMAUS06M-A	7TAA012CD0R0006	10
CMAUS06M-H	7TAA012CD0R0017	10
CMAUS07M-A	7TAA012CD0R0007	10
CMAUS07M-D	7TAA012CD0R0018	10
CMAUS08M-A	7TAA012CD0R0008	10
CMAUS09M-A	7TAA012CD0R0009	10
CMAUS11M-A	7TAA012CD0R0010	10
CMAUS14M-C	7TAA012CD0R0001	10
CMAUS14M-L	7TAA012CD0R0012	10
CMSUS01M-C	7TAA012CC0R0000	8
CMSUS01M-L	7TAA012CC0R0010	8
CMSUS02M-C	7TAA012CC0R0001	8
CMSUS02M-L	7TAA012CC0R0011	8
CMSUS03M-C	7TAA012CC0R0002	8
CMSUS03M-K	7TAA012CC0R0012	8
CMSUS04M-B	7TAA012CC0R0003	8
CMSUS04M-J	7TAA012CC0R0013	8
CMSUS05M-B	7TAA012CC0R0004	8
CMSUS05M-J	7TAA012CC0R0014	8
CMSUS06M-A	7TAA012CC0R0005	8
CMSUS06M-H	7TAA012CC0R0015	8
CMSUS07M-A	7TAA012CC0R0006	8
CMSUS07M-D	7TAA012CC0R0016	8
CMSUS08M-A	7TAA012CC0R0007	8
CMSUS09M-A	7TAA012CC0R0008	8
CMSUS11M-A	7TAA012CC0R0009	8
HS-100-SC	7TBA117230R0000	14
HS-101	7TAA117230R0001	14
HS-102	7TAA117230R0002	14
HS-103	7TAA117230R0003	14
HS-104	7TAA117230R0004	14
HS-105	7TAA117230R0005	14
HS-106	7TAA117230R0006	14
HS-107	7TBA117230R0007	14
HS-108	7TBA117230R0008	14
HS-110	7TBA117230R0010	14

Part No.	GID Code	Page No.
HS-901	7TBA117230R0023	14
HS-902	7TBA117230R0024	14
HS-903	7TBA117230R0025	14
HS-904	7TBA117230R0026	14
HS-905	7TBA117230R0027	14
HS-906	7TBA117230R0028	14
HS-907	7TBA117230R0029	14
HS-908	7TBA117230R0030	14
HS-910	7TBA117230R0032	14
LT100T-SC	7TAA115120R0000	7
LT125T-SC	7TAA115120R0008	7
LT150T-SC	7TAA115120R0009	7
LT-200	7TAA010930R0000	7
LT200T-SC	7TAA115120R0011	7
LT-201	7TAA010910R0000	7
LT-202	7TAA010910R0001	7
LT-203	7TAA010920R0000	7
LT-204	7TAA010920R0001	7
LT-205	7TAA010920R0002	7
LT-206	7TAA010910R0002	7
LT-207	7TAA010920R0003	7
LT-208	7TAA010910R0003	7
LT-210	7TAA010920R0005	7
LT250T-SC	7TAA115120R0060	7
LT-290	7TAA010930R0001	7
LT-291	7TAA010910R0004	7
LT-2910	7TAA010930R0009	7
LT-292	7TAA010910R0005	7
LT-293	7TAA010920R0006	7
LT-294	7TAA010920R0007	7
LT-295	7TAA010920R0008	7
LT-296	7TAA010920R0009	7
LT-297	7TAA010920R0010	7
LT-298	7TAA010920R0011	7
LT300T-SC	7TAA115120R0017	7
LT38T-SC	7TAA115120R0003	7
LT400T-SC	7TAA115120R0061	7
LT4100-SC	7TAA115120R0063	7
LT4100T-SC	7TAA115120R0034	7
LT4125-SC	7TAA115120R0033	7
LT4125T-SC	7TAA115120R0031	7
LT4150-SC	7TAA115120R0030	7
LT4150T-SC	7TAA115120R0029	7
LT4200-SC	7TAA115120R0058	7
LT4200T-SC	7TAA115120R0051	7
LT4250-SC	7TAA115120R0026	7
LT4250T-SC	7TAA115120R0020	7
LT4300-SC	7TAA115120R0021	7
LT4300T-SC	7TAA115120R0019	7

Index

Order code classification

Part No.	GID Code	Page No.
LT438-SC	7TAA115120R0050	7
LT438T-SC	7TAA115120R0045	7
LT4400-SC	7TAA115120R0025	7
LT4400T-SC	7TAA115120R0032	7
LT450-SC	7TAA115120R0043	7
LT450T-SC	7TAA115120R0062	7
LT475-SC	7TAA115120R0040	7
LT475T-SC	7TAA115120R0048	7
LT50T-SC	7TAA115120R0004	7
LT75T-SC	7TAA115120R0006	7
LT-800	7TAA010980R0283	7
LT-801	7TAA010930R0002	7
LT-802	7TAA010930R0003	7
LT-803	7TAA010930R0004	7
LT-804	7TAA010910R0006	7
LT-805	7TAA010980R0288	7
LT-806	7TAA010980R0289	7
LT-807	7TAA010980R0290	7
LT-808	7TAA010980R0291	7
LT-810	7TAA010980R0293	7
LT-890	7TAA010930R0005	7
LT-891	7TAA010930R0006	7
LT-892	7TAA010930R0007	7
LT-893	7TAA010930R0008	7
LT-894	7TAA010980R0294	7
LT-895	7TAA010980R0295	7
LT-896	7TAA010980R0296	7
LT-897	7TAA010980R0297	7
LT9100-SC	7TAA115120R0053	7
LT9100T-SC	7TAA115120R0055	7
LT9125-SC	7TAA115120R0054	7
LT9125T-SC	7TAA115120R0056	7
LT9150-SC	7TAA115120R0049	7
LT9150T-SC	7TAA115120R0044	7
LT9200-SC	7TAA115120R0052	7
LT9200T-SC	7TAA115120R0057	7
LT9250-SC	7TAA115120R0039	7
LT9250T-SC	7TAA115120R0038	7
LT9300-SC	7TAA115120R0036	7
LT9300T-SC	7TAA115120R0037	7
LT938-SC	7TAA115980R0020	7
LT938T-SC	7TAA115120R0042	7
LT9400-SC	7TAA115120R0027	7
LT9400T-SC	7TAA115120R0024	7
LT950-SC	7TAA115120R0059	7
LT950T-SC	7TAA115120R0046	7
LT975-SC	7TAA115120R0047	7
LT975T-SC	7TAA115120R0041	7
XC-269	7TAA010560R0007	9




Part No.	GID Code	Page No.
XC-270	7TAA010560R0008	9
XC-2710	7TAA010560R0009	9
XC-272	7TAA010560R0010	9
XC-273	7TAA010560R0011	9
XC-274	7TAA010560R0012	9
XC-275	7TAA010560R0013	9
XC-276	7TAA010560R0014	9
XC-277	7TAA010560R0015	9
XC-278	7TAA010560R0016	9
XC-290	7TAA010560R0017	9
XC-291	7TAA010560R0023	9
XC-2910	7TAA010560R0024	9
XC-292	7TAA010560R0018	9
XC-293	7TAA010570R0007	9
XC-294	7TAA010570R0014	9
XC-295	7TAA010560R0019	9
XC-296	7TAA010560R0025	9
XC-297	7TAA010560R0020	9
XC-298	7TAA010560R0026	9
XC-870	7TAA010580R0014	9
XC-8710	7TAA010570R0016	9
XC-872	7TAA010580R0015	9
XC-873	7TAA010580R0016	9
XC-874	7TAA010580R0026	9
XC-875	7TAA010580R0027	9
XC-876	7TAA010580R0028	9
XC-877	7TAA010580R0029	9
XC-878	7TAA010580R0030	9
XC-890	7TAA010580R0017	9
XC-891	7TAA010570R0011	9
XC-8910	7TAA010580R0018	9
XC-892	7TAA010570R0012	9
XC-893	7TAA010560R0021	9
XC-894	7TAA010580R0031	9
XC-895	7TAA010580R0019	9
XC-896	7TAA010570R0018	9
XC-897	7TAA010570R0013	9
XC-898	7TAA010580R0020	9

Further information

Visit our website

Visit the Steel City® web pages on ABB.com for our most up-to-date product lineup, and much more. This is the place to go to find all of the planning documents you need at your fingertips, including :

- Technical data sheets
- Chemical resistance charts
- CE declarations of conformity

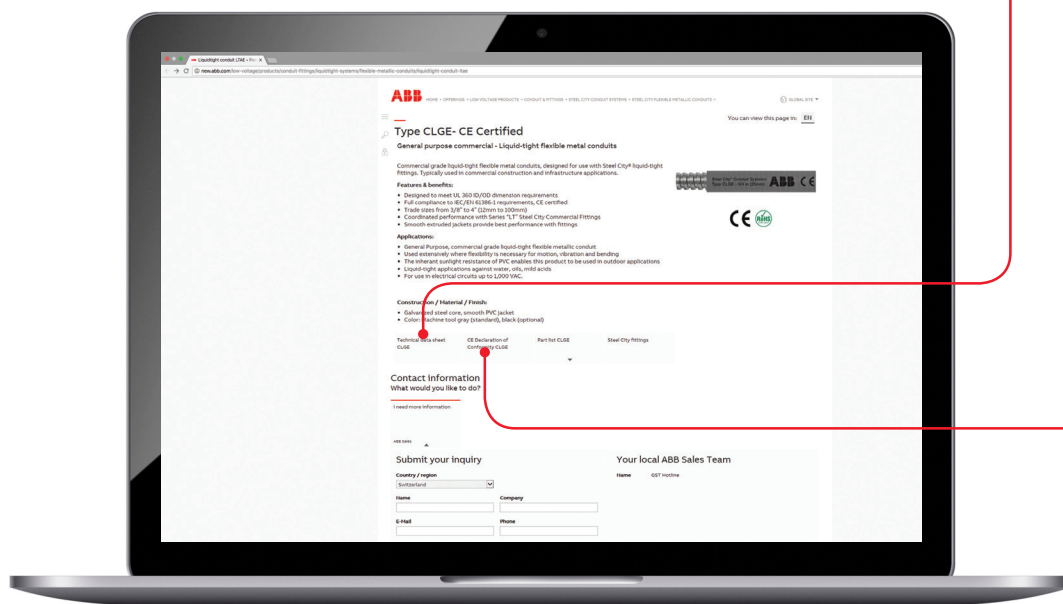

Additional information

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.



US

ABB Installation Products
Electrification Products division
860 Ridge Lake Blvd.
Memphis, TN 38120
+1 901-252-5000

tnb.abb.com