




#ITSSUPCOSEASON

PRESEASON 2020 PROGRAM

20

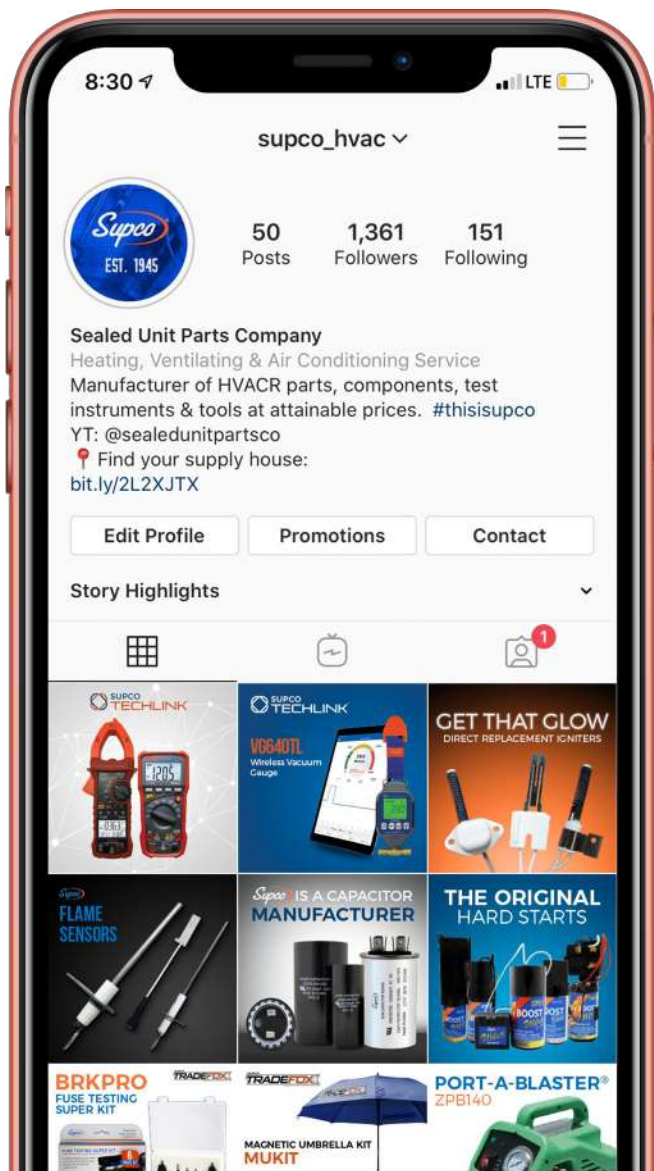

YOUR CONNECTION TO WHAT TECHNICIANS NEED

SAVE UP TO 4% PLUS PREPAID FREIGHT

INTRODUCING

SUPCO[®]
TRADEFox[™]
INNOVATIVE TOOLS FOR THE HVAC LIFE

SEE PAGE 44

2020 PRESEASON PROGRAM TERMS

Participation guarantees our best published price through December 31, 2020**. Pricing for Preseason 2020 is current pricing through 12/31/2019. After Jan 1, 2020 new 2020 pricing will be in effect.

Preseason orders must be placed by 2/28/20 and shipped by 3/31/20.
Multiple preseason orders are allowed.

Reference sale and level on purchase orders.

PAYMENT TERMS

ORDER SIZE	DISCOUNT	TERMS	NET
\$3,500.....	1%.....	30.....	30
\$5,000.....	2%.....	30.....	60
\$7,500.....	3%.....	30.....	60
\$10,000.....	4%.....	30.....	90

*Orders of \$ 5,000- \$ 9,999 can be split (minimum of \$ 2,500 per order)

**Orders of \$ 10,000 or more can be split (minimum of \$ 5,000 per order)

FREIGHT PREPAID

48 STATES

CANADA, ALASKA
& HAWAII
(TO CONTINENTAL PORT)

Regular Order Prepaid Freight Level.....\$2,200.....\$2,700

Preseason Order Prepaid Freight Level.....\$1,500.....\$2,200

Puerto Rico please call customer service for freight terms.
Free freight special only valid for contiguous United States.

BONUS BUYS

- MUST BE ORDERED ON A SINGLE PO
- CAN BE COMBINED
- PLEASE NOTE THE BONUS NUMBER ON PO

BONUS BUY #1

PURCHASE:

Ten (10) pieces combined of the iDVM510, iDVM550, and the VG640TL and receive two (2) iDVM510 FREE! (a \$250.00 value)



BONUS BUY #2

PURCHASE:

Six (6) pieces of the ZPB140 Port-a-Blaster®, and receive two (2) ZCA24 Mini-Split Catch All™ for FREE! (a \$50.00 value)



BONUS BUY #3

PURCHASE:

Twelve (12) pieces of the ECMPRO and receive three (3) BRKPRO Fuse Testing Kit for FREE! (a \$50.00 value)



BONUS BUY #4

PURCHASE:

\$5,000.00 worth of furnace ignitors and receive two (2) M500 Megohmmeter for FREE! (a \$200.00 value)



TABLE OF CONTENTS

FEATURED PRODUCTS	4-12
HVAC	13-31
REFRIGERATION	32-36
TEST INSTRUMENTS	37-41
CHEMICALS	42-43
TRADEFOX™ TOOLS	44-47



SUPCO® WIRELESS VACUUM GAUGE VG640TL

Use the power of your mobile device and the Supco® TechLink™ App to easily document system evacuations.

- Remote Bluetooth® monitoring from up to 200 ft. away
- Our revolutionary contaminant and oil resistant Lifetime Sensor
- Record and export the evacuation process to PDF/Excel/CSV
- Includes vacuum coupler and convenient magnetic holding strap

SUPCO®-REDFISH WIRELESS CLAMP METER iDVM550

Measure AC Volts, AC Amps, system kW and the power factor. Use App-captured data to discuss system operating costs on jobs.

- Bluetooth® connectivity via BTLE (v4.0)
- Tested to IEC/EN61010 safety standards 600V CATIV and 1000V CATIII
- Advanced application diagnostics and guided tests
- Includes line splitter, test leads, carry bag, alligator clip and 9V battery

SUPCO®-REDFISH WIRELESS MULTIMETER iDVM510

Use the Supco® TechLink™ App for guided tests for capacitors, flame sensors, electrical circuits and systems.

- Bluetooth® connectivity via BTLE (v4.0)
- True RMS
- Ingress Protection – IP54 protects from dirt and splashed water
- 6,000 count (3-3/4 digit) resolution
- Advanced application diagnostics and guided tests
- Includes, test leads and 9V battery

METER ACCESSORIES



iDVM510SPLITTER
AC line splitter & voltage check



iDVM333
AC Current Transducer



CASE510
Soft-sided neoprene case for iDVM510 and accessories

CONNECT

WITH THE SUPCO® TECHLINK™ APP

The Supco® TechLink™ App is designed to be used with Supco's® line of connected test instruments and your mobile device. Available for iOS® and Android® devices, the App not only allows technicians the convenience of remote testing, monitoring, and basic measurements, but it can also take the user step-by-step through various component tests.



CONNECT.

Connect one or more connected test instruments in the App's toolbox to display readings.



RECORD & SAVE.

Log measurements with a record button and save for further analysis.



SHARE.

Export results from tests and recordings to CSV or PDF.



VIEW.

Set target, min, max and average measurements in analog, digital and trending line graphs.



DIAGNOSE.

Perform step-by-step guided tests and diagnostics, with help screens.




EDUCATE.

Product recommendations, helpful tips and even a complete Supco® igniter cross reference lookup is available for igniters, flame sensors, contactors, and more.

Documentation Made Easy

Documentation is critical for warranty claims, home owner discussions and job-site reporting for the main office. The Supco® TechLink™ App allows for measurements and tests to be recorded, logged and saved for easy exporting and sharing.

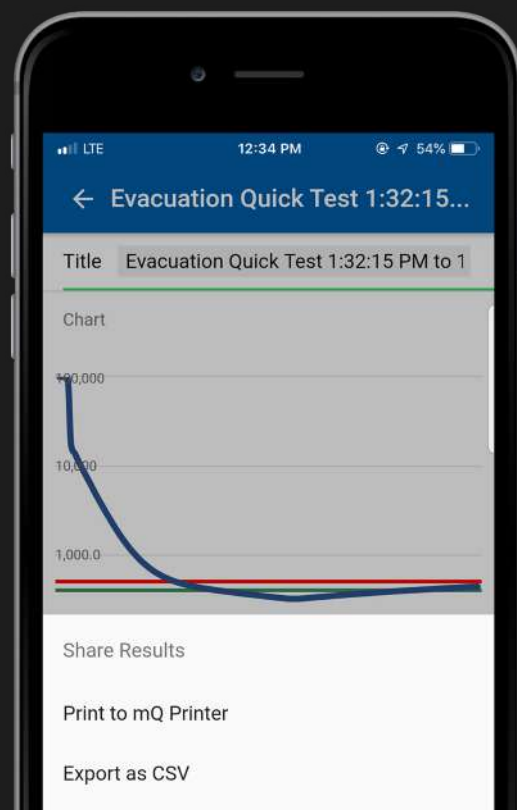

VIEW, LOG & TROUBLESHOOT FOR FREE. NO SUBSCRIPTION REQUIRED.

@IDVM550

"I like that I can capture amps with the unit doors or cover on with the TechLink App, record amps used and submit documentation to the customer."

- Mike Mayberry AKA @hvac_refer_guy



IMAGE CREDIT: @mikeclarkhvac

"It's accurate, durable. Love that you have the ability to measure watts and power factor and test capacitors under load."

- @mikeclarkhvac

THE METER THAT HAS TECHS TALKING



WE PUT HARD STARTS ON THE MAP

We offer every hard start technology. Learn more about consolidating your hard start line and help educate your technicians by viewing our Hard Start Video Series at youtube.com/sealedunitpartSCO.



SPP SUPER BOOST SERIES PTC TECHNOLOGY

Part No.	Increase In Torque
SPP	250%
SPP5	300%
SPP6	500%
SPP7S	600%



E146162



SPP E-SERIES ELECTRONIC POTENTIAL RELAY TECHNOLOGY

Part No.	Application	Capacitor Size (μFXVAC)
SPP4E	1/8-1 hp	88-106 μF
SPP5E	1/3-2 hp	43-52 μF
SPP6E	1/2 - 3 hp	88-106 μF
SPP7E	1 - 4 hp	130-156 μF
SPP8E	1 ton and up	189-227 μF
SPP9E	1 ton and up	233-280 μF
SPP10E	3 ton and up	270-324 μF



ULTRA START SERIES 2-WIRE MECHANICAL POTENTIAL RELAY HARD START

Part No.	Application	Capacitor Size (μFXVAC)	Can Substitute for Kickstart®
WITHOUT RELAY COVER			
SPR5	1 - 3 ton	189-227 μF	TO-5
SPR1	3.5 - 5 ton	270-324 μF	KS-1
WITH RELAY COVER			
MPR5	1 - 3 ton	189-227 μF	TO-5
MPR1	3.5 - 5 ton	270-324 μF	KS-1

EZ SNAP MOUNTING BRACKET ONLY AT SUPCO®



3-SERIES 3-WIRE MECHANICAL POTENTIAL RELAY HARD START

Part No.	Application	Capacitor Size (μFXVAC)	Can Substitute for 5-2-1®
3W1	1 - 3 ton	88 - 108 μF	CSRU1
3W2	3.5 - 5 ton	189 - 227 μF	CSRU2
3W3	4 - 5 ton	270 - 324 μF	CSRU3

- WITH EZ SNAP MOUNTING BRACKET
- 2 PARTS REPLACE 1-5 TONS - 3W1, 3W2

ORIGINAL SERIES

SYSTEMS WITHOUT RUN CAPACITORS



RELAY ONLY

Part No.	Mounting
ICG1*	Quick Connect
ICG-220**	Quick Connect
PO115*	Push-On
PO230**	Push-On

All HP 1/12 to 1/2
*120 Volt **240 Volt



RELAY & OVERLOAD COMBINATIONS

Part No.	Mounting	HP Rating
RO41	Quick Connect	1/4 to 1/3
RO81	Quick Connect	1/12 to 1/5
PRO41	Push On	1/4 to 1/3
PRO81	Push On	1/12 to 1/5

All 120 Volt



3 'N 1 RELAY,
OVERLOAD &
START CAPACITOR
COMBINATION

Part No.	Max AMPS
RCO210	13.3
RCO410*	6.8
RCO810	4.0

All 120 Volt

UNIVERSAL SERIES

SYSTEMS WITH OR WITHOUT RUN CAPACITORS

UNIVERSAL
RELAY OVERLOAD
COMBINATIONS



Part No.	HP Rating
URO41	1/4 to 1/3
URO81	1/12 to 1/5

All 120 Volt



UNIVERSAL 3 'N 1
RELAY OVERLOAD &
START CAPACITOR

Part No.	Max AMPS
URCO210	13.3
URCO410	6.8
URCO810	4.05

All 120 Volt



UNIVERSAL 4 'N 1 RELAY
CAPACITOR, OVERLOAD
& RUN CAPACITOR

Part No.	Max AMPS	Run Cap. Size µFD
URCO210RC	13.3	20
URCO410RC	6.8	15
URCO810RC	4.0	12.5

All 120 Volt

WE OFFER A COMPLETE LINE OF START AND RUN CAPACITORS AT AN UNBEATABLE VALUE

START CAPACITOR OFFERING:

- Microfarad ratings from 21 up to 995 uF
- Voltage ratings from 110 up to 330 volt


RUN CAPACITOR OFFERING:

- Over 250 ratings available
- Single and dual sections
- Round and oval sizes
- Voltage ratings - 370 or 440 volts

MANUFACTURED BY SUPCO®. PERIOD.

START CAPACITORS

- Industry Standard Case Sizes
- Meets CSA RS463-B Standard & IEC 60252-2 Standard
- Non-PCB Biodegradable Synthetic Oil
- Moisture and Oil Resistant Molded Phenolic Resin or Plastic Cases
- Dual Blade Terminals
- Operating Temperature -40°C to 65°C

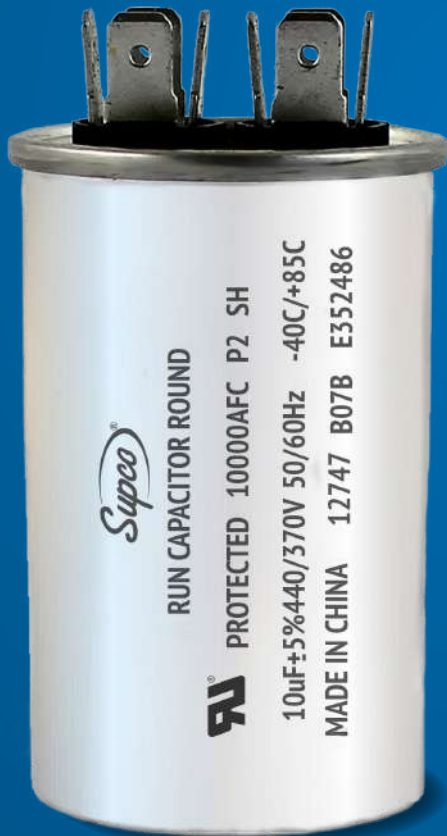

RUN CAPACITORS

- Life Tested at 1.25 Times Rated Voltage at 85°C for 1,500 Hours
- Manufactured in Humidity Controlled Environment
- Higher-Quality Foil for Increased Operating Temperatures -40°C to 85°C
- 100% Capacitance Tested
- Quad-Blade Quick Connect Terminals
- Non-PCB Biodegradable Synthetic Oil
- Proper Can Sizes for Optimal Performance and Heat Dissipation
- Physical Safety Interrupter

ONLY SUPCO® OFFERS THE FULL LINE OF DIRECT REPLACEMENT FLAT AND ROUND IGNITERS

EXACT REPLACEMENT IGNITERS

CAN REPLACE GOODMAN®




S0230K00000S
Can Replace: Goodman®
0230K00000S

CAN REPLACE GOODMAN®




IG418
Can Replace: Goodman®
B14010-185

CAN REPLACE HONEYWELL®

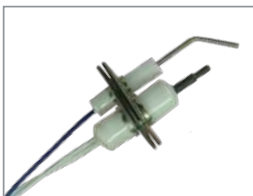

SSN24
Can Replace: Honeywell®
Q3400A1024

CAN REPLACE LOCHINVAR®

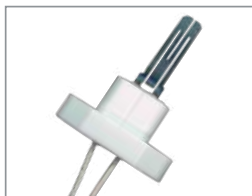

SPLT3400
Can Replace: Lochinvar®
PLT3400

CAN REPLACE GOODMAN®



SKIT03033
Can Replace: Trane®
KIT03033

FLAT SILICON CARBIDE IGNITERS

IG401



Can Replace: 41-401

IG404



Can Replace: 41-404

IG405



Can Replace: 41-405

IG406



Can Replace: 41-406

IG407



Can Replace: 41-407

IG408



Can Replace: 41-408

IG409



Can Replace: 41-409

IG410




Can Replace: 41-410

IG411



Can Replace: 41-411

IG412



Can Replace: 41-412

IG414



Can Replace: 41-414

ROUND SILICON CARBIDE IGNITERS

CAN REPLACE CARRIER®



SIG100

Can Replace: Carrier®
LH33ZS001A, LH33ZS002A

CAN REPLACE GEMLINE®



SIG101

Can Replace: Gemline®
IG101

CAN REPLACE GOODMAN®



SIG102

Can Replace: Goodman®
10735002

CAN REPLACE GEMLINE®



SIG104

Can Replace: Gemline®
IG104

CAN REPLACE NORTON®



SIG106

Can Replace: Norton®
271B, 271J, 271N, 271Y

CAN REPLACE EZ FLOW®



SIG107

Can Replace: EZ Flow®
62374

CAN REPLACE JOHNSTONE®



SIG108

Can Replace: Johnstone®
L40-486

CAN REPLACE GEM®



SIG109

Can Replace: GEM®
IG109




CROSS REFERENCE ON OUR APP

Find the right Supco® igniter match on the free Supco® Techlink™ App.

Available for iOS® and Android®

UNIVERSAL SILICON CARBIDE IGNITER KITS

IG4000 SUPER KIT




5 Brackets & Hardware

Can Replace:

41-402, 41-403, 41-404, 41-405,
41-407, 41-408, 41-409, 41-410,
41-412, 41-414, 41-1090,
41-238, 41-242

IG402K



Can Replace:
41-402, 41-408,
41-410, 41-411

IG403K



Can Replace:
41-403, 41-404,
41-407, 41-409

SSN1100



Includes 3 Brackets

UNIVERSAL SILICON NITRIDE IGNITER KITS

SSN2533



Can Replace:
ICP® 1172533

SSN1100



Can Replace Hundreds of OEMs

SSN0145



Can Replace:
Trane® IGN00145 & IGN-0145

SSN2000



- Economic Design
- <17 sec Time to Temp
- >50,000 cycles
- 1 year warranty

SSN3000



- Robust Design
- <17 sec Time to Temp
- >50,000 cycles
- 2 year warranty

SSN4000



- Miniature Design
- <10 sec Time to Temp
- >200,000 cycles
- 3 year warranty

References to original equipment manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such original equipment manufacturers.

FLAME SENSORS



FLS0005 FURNACE PILOT BURNER ASSEMBLY

- Replaces: Carrier® LH80005
- 740A Electronic Ignition switch with built-in safety

CAN REPLACE A.O. SMITH®



SSN6005 WATER HEATER IGNITER

Replaces: A.O.Smith®
9003626005

FLAME SENSORS

CAN REPLACE GOODMAN®



FLS010

Can Replace:
Goodman® 0130F00010


CAN REPLACE CARRIER®



FLS013

Can Replace:
Carrier® LH33WZ514

CAN REPLACE CARRIER®



FLS014

Can Replace:
Carrier® LH33ZS004

- Can be mounted on multiple burners or adjacent to igniter on other applications
- Aluminum ceramic insulator
- Kanthal flame rod material that can withstand 1800°F

CAN REPLACE GOODMAN®



FLS201

Can Replace:
Goodman® 10735201

CAN REPLACE RHEEM®



FLS301

Can Replace:
Rheem® 62-25343-01

CAN REPLACE MARS®



FLS401

Can Replace:
Mars® 67970

CAN REPLACE YORK®



FLS700


Can Replace:
York® 025-27773-700

THERMOCOUPLES



TH181975

- Used on York® and Nordyne® units
- 39"



TH181955

- Used on Vanguard® units
- Fits gas log fireplaces
- 24"

References to original equipment manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such original equipment manufacturers.

ACCESS FITTINGS

1/4" FLARE KNURLED BRASS CAP WITH NEOPRENE SEAL SF2245



- Heavy-duty, made of CDA 360 brass

VALUE CONSCIOUS REFRIGERATION SAFETY LOCKING CAPS



- Meets IRC M1411.6 and IMC1101.10 for tamper resistance

Part No.	Description
SFL1402	Safety Locking Cap 1/4" set of 2
SFL1410	Safety Locking Cap 1/4" set of 10
SFL1450	Safety Locking Cap 1/4" set of 50
SFL51602	Safety Locking Cap 5/16" set of 2
SFL51610	Safety Locking Cap 5/16" set of 10
SFL51650	Safety Locking Cap 5/16" set of 50



WITH OVER 140 SKUS, WE OFFER A COMPLETE ACCESS FITTING LINE
MANUFACTURED IN OUR OWN FACILITIES.

SADDLE VALVES



CAPS, O-RINGS, LOCK NUTS, VALVE CORES, SEALS & REFRIGERANT LOCKING CAPS




VALVES




1/4" ACCESS FITTINGS WITH 2" LONG COPPER TUBE



TEE FITTINGS



ACCESS BODIES



COPPER TEE FITTINGS



CONNECTORS



TOOLS



VISIT SUPCO.COM AND SEARCH "ACCESS" IN THE SEARCH BAR



DEFINITE PURPOSE CONTACTORS

- Silver cadmium oxide contacts
- Compact universal design and interchangeable mounting plate allow for easy replacement of most brands.
- Space saving dimensions
- Economically priced



1.5 POLE

Part No.	Full Load Amps	Coil Voltage
DP25241	25	24
DP251201	25	120
DP252401	25	240
DP30241	30	24
DP301201	30	120
DP302401	30	240

2 POLE

Part No.	Full Load Amps	Coil Voltage
DP20242	20	24
DP201202	20	120
DP202402	20	240
DP25242	25	24
DP251202	25	120
DP252402	25	240
DP30242	30	24
DP301202	30	120
DP302402	30	240
DP40242	40	24
DP401202	40	120
DP402402	40	240

3 POLE

Part No.	Full Load Amps	Coil Voltage
DP25243	25	24
DP251203	25	120
DP252403	25	240
DP254803	25	480
DP30243	30	24
DP301203	30	120
DP302403	30	240
DP304803	30	480
DP40243	40	24
DP401203	40	120
DP402403	40	240
DP404803	40	480
DP50243	50	24
DP501203	50	120
DP502403	50	240
DP60243	60	24
DP601203	60	120
DP602403	60	240
DP75243	75	24
DP751203	75	120
DP752403	75	240
DP90243	90	24
DP901203	90	120
DP902403	90	240



2 POLE MAGNETIC LINE CONTACTOR SMC11

- Non-Positional
- Replaces Mars® 18001 (exact) and Honeywell® R850B1146, Packard® C18001
- Includes 4 Terminals and 4 Screws
- UL® File Number E328772



3 POLE AUXILIARY SWITCH FOR CONTACTORS

Add additional load switching capability for low load accessories.

Part No.	Contactor	Current	Switch Action
DPAUX1	25A to 40A	10A at 300 VAC	SPDT (1)
DPAUX2	25A to 40A	10A at 300 VAC	SPDT (2)
DPAUX3	25A to 40A	10A at 600 VAC	(1) SPNO, (1) SPNC
DPAUX4	25A to 40A	10A at 600 VAC	SPNO (2)
DPAUX5	50A to 60A	10A at 300 VAC	SPDT (1)
DPAUX6	75A to 90A	10A at 300 VAC	SPDT (2)

UNIVERSAL POTENTIAL RELAYS

ONE RELAY REPLACES HUNDREDS

ADJUSTABLE UNIVERSAL POTENTIAL RELAY



APR5

-VOLTAGE SENSITIVE RELAY

- 110-270 vac, single phase
- Adjustable pick-up voltage
- Safety time out 1.0-1.5 Seconds
- Universal mounting bracket

UNIVERSAL POTENTIAL RELAY



SUPR

-TIME FUNCTION RELAY

- 110-270 vac, single phase
- Start time: 1.0-1.5 Seconds
- Universal mounting bracket

ELIMINATES EXCESSIVE TRUCK STOCK!

90XX SERIES POTENTIAL RELAYS



Part No.	Continuous Coil Voltage	Pick-Up Min.	Pick-Up Max.	Drop Max
9063	168	140	153	45
9064	395	242	272	140
9065	332	168	182	90
9066	395	204	233	130
9067	420	280	310	121
9068	502	314	342	135
9069	338	180	195	105
9070	332	285	305	85
9071	420	223	259	121

- Voltage sensitive relay
- Instant re-start
- Safety time delay
- Use with any size suitable start capacitor

903X SERIES GENERAL PURPOSE SWITCHING RELAYS DOUBLE POLE DOUBLE THROW



Part No.	Coil Voltage	FLA 120V	FLA 208V	FLA 240V	FLA 277V	HP	Essex®/RBM®	Honeywell®
90340	24	13.8	7.6	6.9	6	3/4	90-340	R8222D1014
90341	120	13.8	7.6	6.9	6	3/4	90-341	R4222D1013
90342	208/240	13.8	7.6	6.9	6	3/4	90-342	R4222N1021

FAN RELAYS



Part No.	Coil Voltage	Type	FLA 250V	LRA 250V
90290	24V	SPST	8	18
90291	120V	SPST	8	18
90292	240V	SPST	8	18
90293	24V	SPDT	8	18
90294	120V	SPDT	8	18
90295	240V	SPDT	8	18

Part No.	Coil Voltage	Type	FLA 120V	LRA 120V	FLA 250V	LRA 250V
90370	24V	SPDT	12	60	8	48
90372	120V	SPDT	12	60	8	48
90374	240V	SPDT	12	60	8	48
90380	24V	NO/NC	13	60	8	48
90382	120V	NO/NC	13	60	8	48
90384	240V	NO/NC	13	60	8	48

TIME DELAY RELAYS

TD60 SERIES DELAY ON MAKE TIMERS (DOM)



- 6 sec. to 8 min adjustable
- 12/case

TD68 | TD69

TD70 SERIES DELAY ON BREAK TIMERS (DOB)



- 6 sec. to 5 min adjustable
- 12/case

TD72 | TD73

SHORT CYCLE PROTECTOR



Adjustable time delay on make relay

TDP269

PRESSURE SWITCHES



HIGH PRESSURE OPEN ON PRESSURE RISE

Part No.	Open PSI (Cut Out)	Close PSI (Cut In)	Tolerance +/- PSI	Mars®	Johnson Controls®	Ranco®	Robertshaw®	R410A Application
SHP250150	250	150	15	33354/43322	N/A	N/A	N/A	
SHP250180	250	180	15		N/A	N/A	N/A	
SHP275195	275	195	15	33310/43324	P100CC9C	MPH7102	3100-112	
SHP300200	300	200	15	33355/43325	N/A	MPH7103	N/A	
SHP325225	325	225	15	43326	N/A	MPH7104	N/A	
SHP325230	325	230	15	33313	N/A	N/A	N/A	
SHP350250	350	250	15	33356/33316/ 43327	N/A	MPH71053101201/ 3100150		
SHP375265	375	265	15	33319/43328	N/A	MPH7106	3100111	
SHP400200	400	200	15	33357/43329	N/A	N/A	3100152	
SHP400280	400	280	15	33322/43330	N/A	N/A	N/A	
SHP400300	400	300	15	33358/33370	P100CA1C/ P100CP1C	MPH7107	3101202/3100151/ MG21-112	
SHP425300	425	300	15	33325/43332	N/A	N/A	N/A	
SHP425325	425	325	15	43333	P100CA2C/ P100CP2C	MPH7108	3100100/3100203/ MG211046	
SHP450250	450	250	15	33359/43334	N/A	N/A	N/A	
SHP480380	480	380	15	N/A	N/A	N/A	N/A	X
SHP550450	550	450	15	N/A	P100CE11D	N/A	N/A	X
SHP600475	600	475	15	33361/43335	N/A	N/A	N/A	X
SHP610420	610	420	15	43366/43376	N/A	N/A	N/A	X
SHP665565	665	565	15	N/A	P100CP85D	N/A	N/A	X
SLP90120	90	120	5	43375	N/A	N/A	N/A	X

References to original equipment manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such original equipment manufacturers.



LOW PRESSURE OPEN ON PRESSURE DROP

Part No.	Open PSI (Cut Out)	Close PSI (Cut In)	Tolerance +/- PSI	Mars®	Johnson Controls®	Ranco®	Robertshaw®
SLP0520	5	20	5	33329	P100AC1C	MPL7001	3101001
SLP0530	5	30	5	43342	N/A	N/A	3100002/MG201132
SLP1025	10	25	5	33330	P100AP201C	MPL7011	3100050
SLP1032	10	32	5	33330	P100AP201C	MPL7011	3100050
SLP1535	15	35	5	43371	P100AC2	MPL7002	3100001/MG201026
SLP2045	20	45	5	43345	N/A	N/A	3100003/MG201133
SLP2550	25	50	5	43372	N/A	MPL7012	MG212033
SLP2565	25	65	5	33336/43347	N/A	N/A	3101002
SLP2580	25	80	5	33363/43348	N/A	MPL7003	3101003/3100051
SLP2580	25	80	5	33363/43348	N/A	MPL7003	3101003/3100051
SLP3560	35	60	5	43349	N/A	MPL7004	3100004/MG201593
SLP4560	45	60	5	43351	P100AP2C	MPL7005	N/A
SLP4080	40	80	5	33364/43350	N/A	MPL7014	3101005/3100052
SLP5090	50	90	5	33339/43374	N/A	N/A	N/A
SLP75100	75	100	5	33342/43353	N/A	N/A	N/A
SLP90120	90	120	5	43375	N/A	N/A	N/A



FAN CYCLE CLOSE ON PRESSURE RISE

Part No.	Open PSI	Close PSI	Tolerance	Mars®	Johnson Controls®	Ranco®	Robertshaw®	R410A Application
SFC75120	75	120	15	43301	N/A	MPF7006	N/A	
SFC110170	110	170	15	43302	N/A	MPF7007	N/A	
SFC125265	125	265	15	33340/43303	N/A	N/A	N/A	
SFC210275	210	275	15	33341	N/A	MPF7009	3101101/3100079	
SFC150225	150	225	15	43304	P100AP3C	MPF7008	N/A	
SFC170250	170	250	15	N/A	P100AP4C	N/A	N/A	
SFC200240	200	240	15	N/A	N/A	N/A	3100080	
SFC200365	200	365	15	N/A	N/A	N/A	N/A	X
SFC300400	300	400	15	43307	N/A	MPF7010	N/A	X
SFC275350	275	350	15					X

MANUAL HIGH PRESSURE OPEN ON PRESSURE RISE



Part No.	Open PSI (Cut Out)	Close PSI (Cut In)	Tolerance +/- PSI	Mars®	Johnson Controls®	Ranco®	Robertshaw®	R410A Application
SMR375	375	Manual	15	43312	P100DC3C	MPH7109	N/A	
SMR410	410	Manual	15	33365/43313	P100DA1C	MPH7110	3101301/3100103	
SMR440	440	Manual	15	33352/43315	N/A	N/A	3100104	
SMR575	575	Manual	15	43368	P100DA86D	N/A	N/A	X
SMR610	610	Manual	15	43369	N/A	N/A	N/A	X
SMR630	630	Manual	15	N/A	P100DA81C/D	N/A	N/A	X

References to original equipment manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such original equipment manufacturers.

PRESSURE SWITCHES

ADJUSTABLE AIR PRESSURE SENSING SWITCHES AND KITS



Part No.	Pressure Range ("W.C.)	Replaces
RSS495011	0.25" to 1.0"	RSS-495-11
RSS498013	1.0" to 4.0"	RSS-498-13



AFS222121

General purpose proving switch designed for HVAC and Energy Management applications.

- SPDT Switch
- Replaces White Rodgers® 770-1



NS2000031

Universal Small Footprint Air Pressure Sensing Switch replaces hundreds of small footprint air switches!

- Senses positive, negative or differential pressures
- Hardware kit included
- Set point range: 0.10" to 10.0" W.C.
- 2 Year warranty

HEAT SEQUENCERS

THERMODISC®

OEM DIRECT REPLACEMENT HEAT SEQUENCERS



Part No.	Control Switch		Timing Seconds		OEM
	Volt	On	Off		
Q101	24	1-20	40-110		Goodman® B1290906 Lennox® 12F20 & 58C9701 York® 525-37322-000
Q102	24	30-90	1-30		Carrier® 40CF680020
Q103	24	1-20	40-110		ICP® / Carrier® HN67QC005 ICP® / Carrier® HQ1056789
Q104	24	30-90	1-30		Goodman® BT1256504 York® 525-37325-000 ICP® / Carrier® HN67QC006
Q105	24	1-110	1-110		York® 525-37327-000
Q106	24	1-110	1-110		ICP® / Carrier® HN67QC008 ICP® / Carrier® P284-1313
Q107	24	1-160	1-160		York® 525-37328-000
Q108	24	1-25	65-115		Goodman® B13707-38 ICP® / Carrier® HN67GJ002
Q109	24	20-50	40-110		Janitrol® BT1256500
Q110	24	10-30	30-60		Weatherking® 4223115608
Q111	24	10-40 10-30	90-160 (M1-M2) 30-60 (M3-M4)		Weatherking® 4223115606
Q112	24	10-30 10-30 10-30	90-150 (M1-M2) 30-60 (M3-M4) 30-60 (M5-M6)		Weatherking® 4223115607
Q113	240	10-30	15-65		Klixon® 6000E4-40 Mars® 33265
Q114	24	15-45	15-25		Coleman® 7670-307, 7670-308 7670-130, 7670-913, 7670-101
Q115	24	1-60	1-45		Coleman® 3120A377
Q116	24	1-60	1-45		Coleman® 3110-354


References to original equipment manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such original equipment manufacturers.



STRIP HEAT RESTRING KITS

Quality restrings for electric strip heater repair. Each kit contains one close-wound coil with terminal bolts attached, two sets of ceramic terminal bushings, four hex nuts, two lock and two flat washers. Coils fit ceramic insulators with 3/8" inside diameter openings.

YOU MAY USE EITHER THE NAPCO® OR SUPCO® PART NUMBER TO ORDER RESTRING KITS

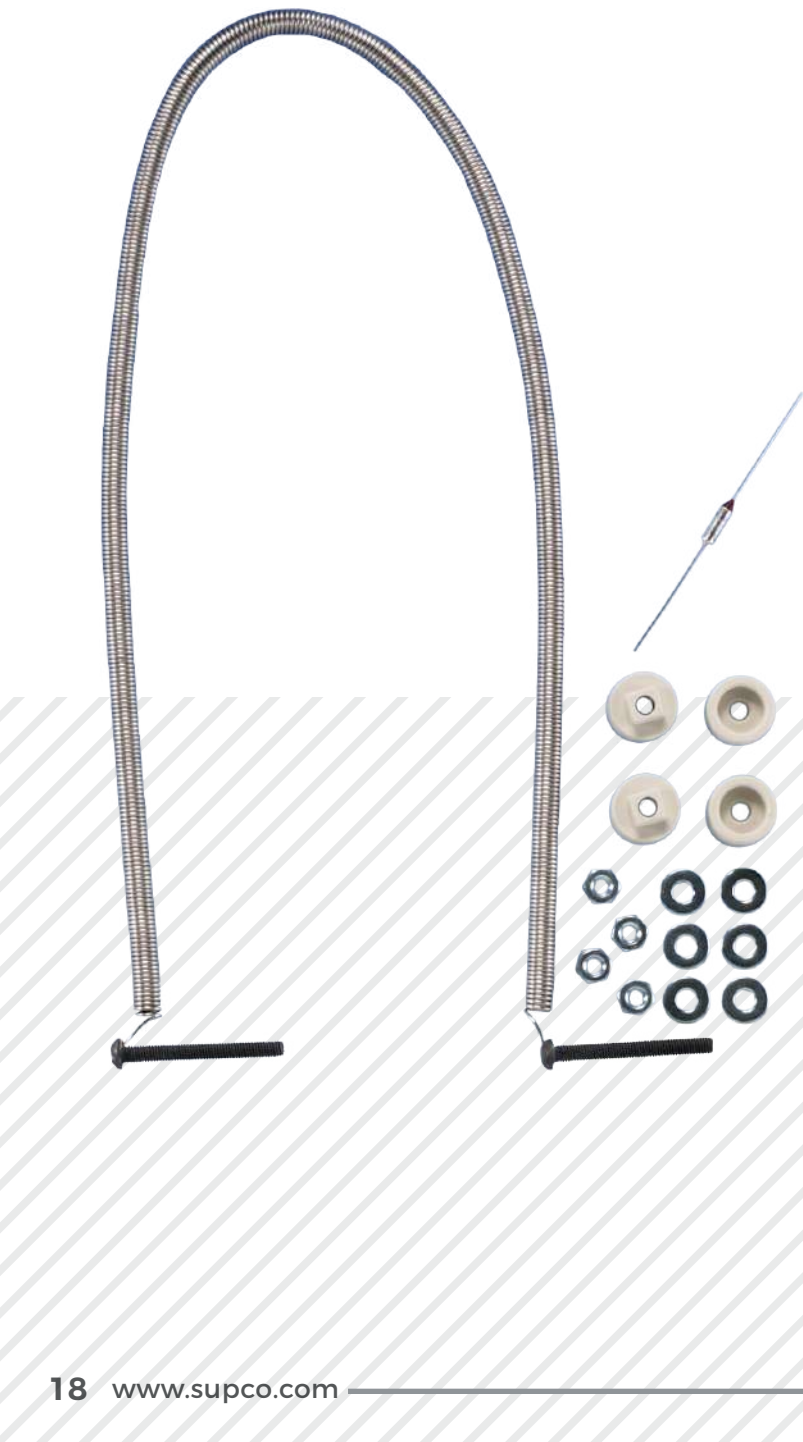

NAPCO® No.	SUPCO® No.	Stretch MAX./MIN.	Watts @ 480 Volts
KIT-48100	DH510-3	68"/21"	1000
KIT-48200	DH502-3	75"/28"	2000
KIT-48250	DH503-3	83"/29"	2500
KIT-48300	DH507-3	98"/34"	3000
KIT-48350	DH501-3	120"/42"	3500
KIT-48400	DH506-3	148"/52"	4000
KIT-48450	DH505-3	132"/46"	4500
KIT-48500	DH500-3	176"/62"	5000
KIT-48600	DH534-3	205"/72"	6000
KIT-48660	DH520-3	187"/65"	6600
KIT-48800	N/A	180"/54"	8000
KIT-481000	N/A	420"/126"	10000

NAPCO® No.	SUPCO® No.	Stretch MAX./MIN.	Watts @ 240 Volts	Watts @ 277 Volts
KIT-27500	DH500-4	170"/60"	3756	5000
KIT-27200	DH502-4	75"/27"	1501	2000
KIT-27250	DH503-4	79"/28"	1877	2500
KIT-27300	DH507-4	99"/34"	2252	3000
KIT-27350	N/A	117"/41"	2629	3500
KIT-27360	N/A	154"/59"	2702	3600
KIT-27400	DH506-4	153"/54"	3003	4000
KIT-27450	N/A	136"/48"	3378	4500
KIT-27600	N/A	150"/45"	4505	6000
KIT-27750	N/A	173"/51"	5630	7500

NAPCO® No.	SUPCO® No.	Stretch MAX./MIN.	Watts @ 208 Volts	Watts @ 240 Volts
KIT-24500	N/A	130"/45"	3756	5000
KIT-24501	DH500	130"/45"	3756	5000
KIT-24100	N/A	36"/13"	751	1000
KIT-24150	N/A	49"/17"	1127	1500
KIT-24200	N/A	74"/26"	1502	2000
KIT-24250	DH503	88"/31"	1878	2500
KIT-24275	N/A	110"/30"	2063	2750
KIT-24300	DH507	103"/37"	2253	3000
KIT-24330	N/A	128"/43"	2479	3300
KIT-24350	DH501	145"/50"	2629	3500
KIT-24375	N/A	98"/29"	2816	3750
KIT-24400	DH506	114"/40"	3004	4000
KIT-24425	N/A	128"/45"	3155	4200
KIT-24450	N/A	121"/42"	3380	4500
KIT-24466	N/A	137"/48"	3505	4666
KIT-24475	N/A	134"/47"	3568	4750
KIT-24550	N/A	140"/42"	4131	5500
KIT-24560	DH560	160"/60"	4206	5600
KIT-24600	DH534	156"/54"	4507	6000
KIT-24660	DH520	202"/71"	4957	6600
KIT-24750	N/A	135"/41"	5633	7500
KIT-24800	N/A	215"/65"	6000	8000



LARGE DIAMETER COILS

Large diameter coils for use in many newer furnaces, strip heaters, duct heaters, air handlers, commercial heat exchangers, wall heaters, etc. STANDARD kits come with attached bolts.

NAPCO® No.	O.D. Inch	Stretch MAX./MIN.	Watts @ 480 Volts
KIT-48500435	7/16	110"/30"	5000
KIT-48450435	7/16	125"/33"	4500
KIT-48400435	7/16	102"/34"	4000
KIT-48350435	7/16	107"/30"	3500
KIT-48600500	1/2	126"/42"	6000
KIT-48500500	1/2	95"/26"	5000
KIT-48450500	1/2	95"/33"	4500
KIT-48660625	5/8	129"/43"	6600
KIT-48600625	5/8	103"/34"	6000
KIT-48500625	5/8	66"/20"	5000



NAPCO® No.	O.D. Inch	Stretch MAX./MIN.	Watts @ 240 Volts	Watts @ 277 Volts
KIT-27350435	7/16	90"/27"	2628	3500
KIT-27300435	7/16	63"/20"	2252	3000
KIT-27250435	7/16	70"/22"	1877	2500
KIT-27450500	1/2	108"/32"	3378	4500
KIT-27350500	1/2	66"/20"	2627	3500
KIT-27300500	1/2	55"/18"	2252	3000
KIT-27250500	1/2	66"/20"	1877	2500
KIT-27500625	5/8	75"/20"	3753	5000
KIT-27400625	5/8	99"/33"	3003	4000
KIT-27350625	5/8	60"/20"	2627	3500
KIT-27500750	3/4	64"/17"	3753	5000
KIT-27450750	3/4	79"/23"	3378	4500
KIT-27400750	3/4	81"/27"	3003	4000
KIT-27200750	3/4	62"/21"	1501	2000

NAPCO® No.	O.D. Inch	Stretch MAX./MIN.	Watts @ 208 Volts	Watts @ 240 Volts
KIT-24500435	7/16	102"/30"	3750	5000
KIT-24350435	7/16	100"/30"	2625	3500
KIT-24300435	7/16	73"/23"	2250	3000
KIT-24150435	7/16	51"/16"	1125	1500
KIT-24800500	1/2	96"/32"	6000	8000
KIT-24600500	1/2	96"/31"	4500	6000
KIT-24560500	1/2	99"/33"	4200	5600
KIT-24500500	1/2	90"/30"	3750	5000
KIT-24466500	1/2	72"/24"	3500	4666
KIT-24450500	1/2	75"/24"	3375	4500
KIT-24400500	1/2	84"/28"	3000	4000
KIT-24350500	1/2	65"/18"	2625	3500
KIT-24330500	1/2	54"/18"	2475	3300
KIT-24200500	1/2	45"/15"	1500	2000
KIT-24250500	1/2	50"/15"	1875	2500
KIT-24275500	1/2	69"/23"	2063	2750
KIT-24800625	5/8	75"/25"	6000	8000
KIT-24600625	5/8	72"/24"	4500	6000
KIT-24560625	5/8	76"/25"	4200	5600
KIT-24500625	5/8	70"/25"	3750	5000
KIT-24475625	5/8	79"/26"	3563	4750
KIT-24450625	5/8	66"/22"	3375	4500
KIT-24425625	5/8	70"/23"	3188	4250
KIT-24400625	5/8	75"/23"	3000	4000
KIT-24300625	5/8	58"/20"	2253	3000
KIT-24275625	5/8	57"/18"	2063	2750
KIT-24660750	3/4	73"/24"	4950	6600
KIT-24600750	3/4	63"/20"	4500	6000
KIT-24560750	3/4	63"/20"	4200	5600
KIT-24500750	3/4	60"/20"	3750	5000
KIT-24425750	3/4	57"/19"	3188	4250
KIT-24475750	3/4	66"/22"	3563	4750
KIT-24400750	3/4	54"/18"	3000	4000
KIT-24350750	3/4	50"/16"	2625	3500
KIT-24300750	3/4	44"/14"	2250	3000
KIT-24150750	3/4	62"/21"	1125	1500

SUPCO® HAS ACQUIRED NAPCO®

NAPCO® is a leading manufacturer of aftermarket electrical heating elements for both HVAC and Appliance applications. Our NAPCO® line makes us the leading aftermarket provider of quality generic electric heaters for electric furnaces, which we manufacture in the United States.

WE OFFER OVER 340 SKUs OF V-BELT TYPES

All belts clearly identify RMA classic part number and dimensionally equivalent FHP number.

SEE THE FULL OFFERING AT **SUPCO.COM**
SEARCH ON KEYWORD "**BELT**"



MULTI-PLUS DUAL BRAND V-BELTS

L SECTION FHP V BELTS

- 3/8" top width
- 7/32" thick

A SECTION CLASSICAL V BELTS

- 1/2" top width
- 11/32" thick
- Dual brand A & 4L

B SECTION CLASSICAL V BELTS

- 21/32" top width
- 13/32" thick
- Dual brand B & 5L

SURGE PROTECTION

NEW AND IMPROVED

LINEBACKER® SURGE PROTECTOR LBK10

- Type 4x weatherproof enclosure can be mounted outside the condensing unit
- Type 2 surge protection device under UL standard 1449, 4th edition
- Uses state-of-the-art TPMOV technology
- The **ONLY** surge protector on the market to have voltage & ground monitors that will completely disconnect the equipment from power when compromised






CLEAR BLUE® UV LIGHT SYSTEM - RESIDENTIAL SOLUTIONS

UV whole house air purifiers maintain clean system coils to reduce mold, bacteria and viruses and help reduce HVAC maintenance.

ADVANCED UUV-CBA



MASTER
UUV-CBM



PCO -
PHOTOCATALYTIC
OXIDATION
UUV-CBM-PCO



REPLACEMENT
BULB
UUV-LP160T5

CLEAR BLUE® ARCTIC UV SURFACE ICE MACHINE DISINFECTION - COMMERCIAL SOLUTIONS

SINGLE OR DUAL LAMP GERMICIDAL (UVC) SURFACE CLEANER

Reduces bacteria and mold growth by up to 99.9% | Continuous germicidal operation
8" shatterproof UVC lamp rated for two years | Compatible with most major ice machine brands



UUVS-CBAR



UUVS-CBAR-D



Replacement Lamp for Arctic Systems

- Reduces bacteria and mold growth by up to 99.9% Instant re-start
- Continuous germicidal operation
- 8" shatterproof UVC lamp rated for two years
- Compatible with most major ice machine brands

MINI-SPLIT COMPONENTS

MINI-SPLIT CONDENSATE PUMPS



- FLOWWATCH® 2**
DE05LUB100 - 120 V
DE05LUB110 - 240 V
- 2-year warranty
 - Can use with optional mounting kit



MOUNTING KIT GC1KFX2010

- For Siccom® mini split pumps only



MINI-SPLIT RUN CAPACITORS



Part No.	Description
RC1X450	1MFD 450V
RC1.5X450	1.5MFD 450V
RC2X450	2MFD 450V
RC2.5X450	2MFD 450V
RC3X450	3MFD 450V
RC3.5X450	3.5MFD 450V
RC4X450	4MFD 450V
RC4.5X450	4.5MFD 450V
RC5X450	5MFD 450V
RC6X450	6MFD 450V
RC7.5X450	7.5MFD 450V
RC8X450	8MFD 450V
RC10X450	10MFD 450V
RC12.5X450	12.5MFD 450V
RC15X450	15MFD 450V
RC20X450	20MFD 450V

MINI-SPLIT BRACKETS



Part No.	Size	Max Capacity
MB100	14.5" X 17.75"	240 lb.
MB200	15.5" X 17.75"	240 lb.
MB300	16.5" X 21.63"	265 lb.
MB400	16.5" X 21.63"	240 lb.
MB500	19.25" X 21.63"	265 lb.
MB600	15.35" X 17"	330 lb.
MB700	18" X 18"	440 lb.

DIRECT REPLACEMENT MOTORS



UNIVERSAL 3.3" EVAPORATOR
FAN MOTOR
SM1127

- Open Ventilation; Reversible
- Sleeve Bearing
- 115/230V; 1150 RPM
- 1.1/.6 AMPS

CAN REPLACE 100 OEMS



DRAFT INDUCER MOTOR
SM4753


- 115V / 1.8 FLA
- Overload protection
- Single speed - 3300 RPM
- Cable with connectors and plastic fan blade included

CAN REPLACE CARRIER® HC21ZE117 & MANY OTHERS



MOTOR KIT ASSEMBLY
SM6700B

- 120V / 3000RPM
- 3/16" X 1-1/4" Shaft
- 5/8" Stack
- Replaces Acme Miami® 700
- OEM Replacement for Bohn®, Heatcraft®, Uppco®, Singer®, GE® 33 Series
- Kit Includes Reversible Motor, Three Fan Blades (FB402, FB455 & FB550), Hardware Kit and Instructions

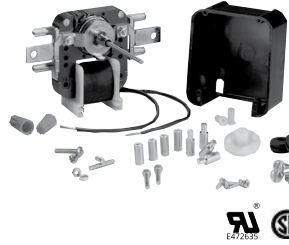

UNIVERSAL EVAPORATOR FAN MOTOR KIT
SM999

- 120 VAC, 3000 RPM, 1/200 HP, .31 Amp Impedance Protected
- Replaces over 450 different evaporator type motors
- Pre-fastened multi fit, break off mounting bracket
- Break off 2" motor shaft with breakaways at 1/2" and 1 1/2"
- Includes all mounting accessories and hardware
- Reversible rotation
- Single speed
- Shaft diameter 1/8"

UNIT BEARING WATT MOTORS ALUMINUM



Part No.	Watts	Volts	Amps	Rotation	Shaft Diameter	Shaft Length
SM5109	2	120	0.28	CWOSE	1/4" Threaded	1/2"
SM5211	4	120	0.36	CWOSE	1/4" Threaded	1/2"
SM5212	4	120	0.32	CCWOSE	1/4" Threaded	1/2"
SM5221	4	240	0.16	CWOSE	1/4" Threaded	1/2"
SM5222	4	240	0.16	CCWOSE	1/4" Threaded	1/2"
SM5311	6	120	0.52	CWOSE	1/4" Threaded	1/2"
SM5312	6	120	0.43	CCWOSE	1/4" Threaded	1/2"
SM5411	9	120	0.60	CWOSE	1/4" Threaded	1/2"
SM5412	9	120	0.64	CCWOSE	1/4" Threaded	1/2"
SM5421	9	240	0.32	CWOSE	1/4" Threaded	1/2"
SM5422	9	240	0.32	CCWOSE	1/4" Threaded	1/2"
SM5811	16	120	0.92	CWOSE	1/4" Threaded	1/2"
SM5812	16	120	0.92	CCWOSE	1/4" Threaded	1/2"
SM5821	16	240	0.48	CWOSE	1/4" Threaded	1/2"
SM5822	16	240	0.48	CCWOSE	1/4" Threaded	1/2"

CAST IRON



Part No.	Watts	Volts	Amps	Rotation	Shaft Diameter	Shaft Length
SM351	35	120	1.4	CWOSE	1/4" Threaded	1/2"
SM352	35	120	1.4	CCWOSE	1/4" Threaded	1/2"
SM353	35	240	0.7	CWOSE	1/4" Threaded	1/2"
SM354	35	240	0.7	CCWOSE	1/4" Threaded	1/2"
SM501	50	120	1.7	CWOSE	3/8" Smooth Flatted	1/2"
SM502	50	120	1.7	CCWOSE	3/8" Smooth Flatted	1/2"
SM503	50	240	0.85	CWOSE	3/8" Smooth Flatted	1/2"
SM504	50	240	0.85	CCWOSE	3/8" Smooth Flatted	1/2"

References to original equipment manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such original equipment manufacturers.



- SM675 is Thermal Protected
- SM675 Includes Fan Blade FB550 Only
- SM670, SM672, SM673 and SM690C Include Fan Blades FB402 and FB550
- Motor Kits Include Complete Hardware and Mounting Kits

SM600 SERIES EXACT REPLACEMENT & UTILITY MOTOR KITS

Part No.	Type	Volts AC	RPM	Shaft (in.)	Stack (in.)	Rotation (Reversible)
SM670	Sleeve	120	3000	3/16" x 1 1/4"	5/8"	CW/CCW
SM671	Sleeve	120	3000	3/16" x 1 1/4"	5/8"	CW/CCW
SM672	Sleeve	240	3000	3/16" x 1 1/4"	5/8"	CW/CCW
SM673	Sleeve	120	3000/1550	3/16" x 1 1/4"	5/8"	CW/CCW
SM675	Sleeve	120/240	3000	3/16" x 2 3/8"	1"	CW/CCW
SM690C	Sleeve	120	3000	3/16" x 1 1/4"	5/8"	CW/CCW

FAN HOOD MOTORS



CAN REPLACE NUTONE® RANGE HOOD VENTILATORS

Part No.	Volts	Speeds	RPM	Rotation	Shaft Diameter	Shaft Length
SM550	120	1	3000	CCW	7/32" Flat	1 3/4"
SM550P2*	120	1	3000	CCW	7/32" Flat	1 3/4"
SM551	120	2	3000/1640	CW	7/32" Flat	1 7/16"
SM552	120	1	3000	CCW	7/32" Flat	1 1/4"
SM553	120	1	3000	CCW	7/32" Flat	1 3/4"
SM554	120	2	3000/1500	CCW	7/32" Flat	1 7/16"
SM555	120	1	3000	CCW	7/32" Flat	2 3/8"

*2 Pack



EXACT REPLACEMENT PLASTIC IMPELLERS

Part No.	Replaces	Blade O.D.	Hole I.D.
SB001	Nutone® 68920	4 5/8"	.181



MB55 - 3 LEG

MB554 - 4 LEG

MOTOR MOUNT BRACKET KIT

- Used with 5.5" motors
- Grommets and eyelets included
- Designed for applications with 9" or 10" bolt circle diameters.

ECONOMIC MOTOR PROTECTION WITH FULL VOLTAGE RANGE & ADJUSTABLE IMBALANCE



UNIVERSAL THREE-PHASE MOTOR PROTECTOR TPMPU

- Line Voltage: 180-600VAC
- Imbalance: Adjustable 4% to 20%
- Contact Type: SPDT 10A@240 VAC
- Short Cycle Adj: 10 Sec. to 5 Min.



THREE-PHASE MOTOR PROTECTOR TPMP2

- Line Voltage: 208-277VAC
- Imbalance: Fixed 7%
- Contact Type: SPDT 5A@240 VAC

References to original equipment manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such original equipment manufacturers.

THERMODISC®**ML SERIES - DEFROST THERMOSTATS**

Part No.	Open °F	Close °F	Diff. °F	Mars®	Uniline®
ML37*	37	47	10		
ML45	45	20	25	33008	31-001 17001
ML50	50	20	30	33009	31-002 17003
ML55	55	20	35	33010	31-003 17005
ML60	60	20	40	33011	31-004 17007
ML70	70	20	50	33012	31-005 17009
ML80	80	50	30	33020	31-006 17011

*Closes on the rise



Part No.	Open °F	Close °F	Mount	Replaces
SL79002	55	35	Tube	Russell® 103079002
SL79005	65	30	Surface	Russell® 103079005

- 3-wire Defrost Terminator and Fan Control (Exact Replacement)
- SPDT
- Resistive Amps: 25
- Volts AC: 120/240

SL SERIES EXACT REPLACEMENT REFRIGERATION THERMOSTATS

- 2-wire Heater Limit
- SPST
- Resistive Amps: 25
- Volts AC: 120/240



Part No.	Open °F	Close °F	Mount	Replaces
SL5708	75	40	Surface	Bohn®, Larkin®, Chandler®, Climate Control® 5708L & 4752C



Part No.	Open °F	Close °F	Mount	Replaces
SL5709	55	35	Surface	Bohn®, Larkin®, Chandler®, Climate Control® 5709L & 4751C

- Surface Mount
- 3-wire Defrost Terminator and Fan Control (Exact Replacement)
- SPDT
- Resistive Amps: 25
- Volts AC: 120/240

SLT SERIES

Part No.	Open °F	Close °F	Diff. °F
SLT45	45	22	23
SLT50	50	10	40
SLT55	55	25	30
SLT60	60	30	30

- Metal case with waterproof epoxy potting
- Heavy Duty Rating 10 Amps @ 120 V / 5 Amps @ 240 V
- Residential and Commercial Applications
- Switching is SPST
- Rated up to 1200 watts
- Uses SL249 tube clip

**FIRE STAT
SMRL130**

- Opens @ 130°F

**FREEZE PROTECTION
CONTROL
SFPC**

- Opens 35°F / Close 50°F
- Fits 7/8" O.D. tubing

References to original equipment manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such original equipment manufacturers.

SMALL FLUSH MOUNT SPST LIMIT THERMOSTATS STYLE 36TXE21 (FLUSH MOUNT AUTOMATIC ROLLOUT)

THERMODISC®


Part No.	Terminals	Cut Out (°F)	Cut In (°F)	Diff.
SLF222VA	Vertical 1/4"	222	182	40
SLF230HA	Horizontal 1/4"	230	190	40

THERMAL CUT OUTS



A



B



C

Part No. 15 Amp Series 1	Open Temp °C	Open Temp °F	Style
STC4228	109	228	A
STC4257	125	257	A
STC4283	139	283	A
STC4300	149	300	A
STC4333	167	333	A
*STC8170	77	170	A
*STC8283	139	283	A

*25 AMPS

Part No. 15 Amp Series 1	Open Temp °C	Open Temp °F	Style
STC4358	184	363	A
STC4438	226	438	A
STC4468	242	468	A
STC5257	125	257	B
STC5300	149	300	B
STC5333	167	333	B
STC5377	192	377	B
STC6257	125	257	C
STC6300	149	300	C
STC6333	167	333	C
*STC86377	192	377	C

*25 AMPS

SERIES COVERS ALMOST 95% OF HEATER AND DRYER APPLICATIONS

AT SERIES ADJUSTABLE



OPEN ON TEMPERATURE RISE
ADJUSTABLE THERMOSTATS STYLE 74T11

Part No.	Adjustable Range (°F)	Diff.
AT012	135-175	20
AT013	175-215	40
AT014	210-250	40
AT015	250-290	40

CLOSE ON TEMPERATURE RISE
ADJUSTABLE THERMOSTATS STYLE 74T11

Part No.	Adjustable Range (°F)	Diff.
AT021	90-130	20
AT022	140-180	20

SHF SERIES FAN CONTROL CLOSE ON RISE



Part No.	Description	Cut Out (°F)	Cut In (°F)	Diff.
SHF90	Fan	80	90	10
SHF110	Fan	90	110	20
SHF110DC	Fan - Deep Cup	90	110	20
SHF120	Fan	110	120	10
SHF140	Fan	120	140	20
SHF250	Fan	220	250	30

Adapter Flange Plate included with each thermostat.

LIMIT CONTROL OPEN ON RISE STYLE 60T11



Part No.	Description	Cut Out (°F)	Cut In (°F)	Diff.
SHL120	Limit - Open on Rise	120	110	10
SHL140	Limit - Open on Rise	140	100	40
SHL150	Limit - Open on Rise	150	110	40
SHL160	Limit - Open on Rise	160	120	40
SHL170	Limit - Open on Rise	170	130	40
SHL180	Limit - Open on Rise	180	140	40
SHL190	Limit - Open on Rise	190	150	40
SHL200	Limit - Open on Rise	200	160	40
SHL230	Limit - Open on Rise	230	190	40
SHL250	Limit - Open on Rise	250	210	40

Adapter Flange Plate included with each thermostat.



HVAC FLUSH MOUNT STAGING THERMOSTATS STYLE 60TX21

Part No.	Description	Open (°F)	Close (°F)	Diff.
FL60	HVAC Staging Thermostat	60	45	15

MANUAL ROLLOUTS SPST LIMIT THERMOSTATS STYLE 36TX16



Part No.	Cut Out (°F)	Part No.	Cut Out (°F)
SRL130	130	SRL250	250
SRL135	135	SRL260	260
SRL220	220	SRL300	300
SRL230	230	SRL350	350
SRL240	240		

1/4" Vertical terminals;
Manual Cut in



"L" SERIES, SINGLE POLE SINGLE THROW STYLE 60T11

Part No.	Diff.	Open (°F)	Close (°F)	Part No.	Diff.	Open (°F)	Close (°F)
L120	10	120	110	L190	40	190	150
L125	10	125	115	L200	40	200	160
L130	15	130	115	L205	40	205	165
L135	15	135	120	L225	40	225	185
L140	20	140	120	L240	40	240	200
L145	20	145	125	L250	40	250	210
L150	20	150	130	L260	40	260	220
L155	20	155	135	L270	40	270	230
L160	20	160	140	L290	40	290	250
L165	20	165	145	L300	40	300	260
L170	20	170	150	L320	40	320	280
L175	20	175	155	L340	40	340	300
L180-20	20	180	160				
L180-40	40	180	140				

**“LD” SERIES SINGLE POLE
DOUBLE THROW STYLE 60T13**

Part No.	Description	Open (°F)	Close (°F)	Diff.
LD120	SPDT Thermostats	120	105	15
LD135	SPDT Thermostats	135	120	15
LD140	SPDT Thermostats	140	120	20
LD145	SPDT Thermostats	145	125	20
LD155	SPDT Thermostats	155	135	20
LD170	SPDT Thermostats	170	150	20
LD200	SPDT Thermostats	200	160	40
LD225	SPDT Thermostats	225	185	40
LD270	SPDT Thermostats	270	230	40

**SLS SERIES
AUTOMATIC
ROLLOUTS SPST LIMIT
THERMOSTATS**

Part No.	Terminals	Cut Out (°F)	Cut In (°F)	Diff.
SLS140	45° angle 1/4"	140	100	40
SLS150	45° angle 1/4"	150	110	40
SLS160	45° angle 1/4"	160	120	40
SLS170	45° angle 1/4"	170	130	40
SLS180	45° angle 1/4"	180	140	40
SLS200	45° angle 1/4"	200	160	40
SLS300	45° angle 1/4"	300	250	50
SLSW210	45° angle 1/4"	210	170	40
SLSW300HB	Horizontal 3/16"	300	250	50

**SHM SERIES
MANUAL RESET
LIMIT CONTROL
OPEN ON RISE**

Part No.	Terminals	Cut Out (°F)	Cut In (°F)
SHM125	Limit - Open on Rise	125	Manual
SHM130	Limit - Open on Rise	130	Manual
SHM160	Limit - Open on Rise	160	Manual
SHM170	Limit - Open on Rise	170	Manual
SHM180	Limit - Open on Rise	180	Manual
SHM200	Limit - Open on Rise	200	Manual
SHM210	Limit - Open on Rise	210	Manual
SHM290	Limit - Open on Rise	290	Manual
SHM350	Limit - Open on Rise	350	Manual

Adapter Flange Plate included with each thermostat.

ONLY AT SUPCO®

SUPCO® IS THE ONLY SOURCE
FOR EXACT OEM **CAMSTAT®** PARTS AND COMPONENTS.

CAM-STAT®

S106 SERIES TIME DELAY RELAYS



- SPST or SPDT
- Delay On/Off Timing
- 24 VAC Input

Part No.	A-1 Part No.	Switch Action	Time Delay ON (sec.)	Time Delay OFF (sec.)
S1061A4575C	FF582	SPST	30 to 50	60 to 90
S1061A5040C	FF583	SPST	45 to 55	30 to 50
S1061A40100C	FF584	SPST	35 to 45	80 to 110
S1061A5560C	FF585	SPST	50 to 60	45 to 75
S1061B6545C	FF586	SPDT	60 to 70	45 to 75

F47 & F214 SERIES FAN CONTROLS



- Adjustable Fan Off Setting
- Adjustable Fan Differential Setting

Part No.	A-1 Part No.	Width	Length	Fan OFF Temp (°F)	Fan Differential (°F)
F473TD12025C	FF564	7/16"	3"	90 to 120	25 to 50
F477TD12025C	FF565	7/16"	7"	90 to 120	25 to 50
F21412A14025C	FF562	1-1/16"	3"	60 to 140	25 to 50
F21413A14025C	FF563	1-1/16"	7"	60 to 140	25 to 50

L59 LIMIT CONTROLS



- SPDT Switch
- Adjustable Limit Setting

Part No.	A-1 Part No.	Length	Limit OFF Temp. (°F)	Fixed Differential (°F)
L593BA	FF568	3"	120 to 250	30
L597BA	FF569	7"	120 to 250	30

FA47TS SERIES FAN CONTROLS W/ TIME START



- Built in "Heat Assist" Timed Blower On
- Adjustable Fan OFF Setting

Part No.	A-1 Part No.	Length	Limit OFF Temp. (°F)	Fixed Differential (°F)	Time Delay 24 VAC (sec.)
FA47TS3110	FF566	3"	80 to 110	60 (Fixed)	25 to 60
FA47TS7110	FF567	7"	80 to 110	60 (Fixed)	25 to 60

ONLY AT SUPCO®

SUPCO® IS THE ONLY SOURCE
FOR EXACT OEM **CAMSTAT®** PARTS AND COMPONENTS.

CAM-STAT®

FAL SERIES UNIVERSAL FAN AND LIMIT CONTROLS



Part No.	A-1 Part No.	Length	Fan OFF Temp (°F)
FAL3C05TD120A	FF558	3"	90 to 120
FAL7C05TD120A	FF559	7"	90 to 120
FAL7C20BT120AB	FF594	7"	90 to 120

- Fan Differential: 25 - 50°F
- Limit Temp: 150 - 250°F
- Limit Differential: 30°F

FALTS SERIES FAN AND LIMIT CONTROLS W/ TIME DELAY



Part No.	A-1 Part No.	Length	Fan OFF Temp (°F)
FALTS57C05T120A	FF560	7"	90 to 120
FALTS57C65T120A	FF561	7" w/ shield	90 to 120
FALTS57C13BT120A	FF591	7" SPDT	90 to 120

- Fan Differential: 25 - 50°F
- Limit Temp: 150 - 250°F
- Limit Differential: 30°F

PR SERIES PILOT REIGNITERS



Part No.	A-1 Part No.	Description
PR24120	FF541	Hardware Kit for PR2412036W
PR2412036W	FF536	24/120 VAC Hardware Kit, Spark Cable & Module

- Prevents pilot flames from extinguishing


BC7070 (F7070) BLOWER CONTROL



- Blower On Time: 0-240 Seconds Adjustable
- Blower Off Time: 0-240 Seconds Adjustable
- Increase heating efficiency by delaying the on and off cycle of the blower fan
- Control Voltage: 24 VAC
- Relay Contacts: SPST

GAS FURNACE LIMITS AND PLENUM THERMOSTATS

Part No.	Description	Open	Close	Diff.	Board W"	Board H"	Insertion L"
SHL501	L170-40 SPST	170°	130°	40°	1.88"	2.8"	3.12"
SHL502	L180-30 SPST	180°	150°	30°	1.88"	2.8"	3.12"
SHL503	L190-40 SPST	190°	150°	40°	1.88"	2.8"	3.12"
SHL504	L240-40 SPST	240°	200°	40°	1.88"	2.8"	3.12"
SHL505	L140-40 SPST	140°	100°	40°	1.88"	2.8"	1.87"
SHL506	L170-40 SPST	170°	130°	40°	1.88"	2.8"	1.87"
SHL507	L140-30 SPST	140°	110°	30°	1.88"	2.8"	3.12"
SHL508	L190-20 SPST	190°	170°	20°	1.88"	2.8"	3.12"
SHL509	L240-30 SPST	240°	210°	30°	1.88"	2.8"	3.12"
SHL510	L150-20 SPST	150°	130°	20°	1.625"	1.44"	3.12"
SHL511	L160-20 SPST	160°	140°	20°	1.625"	1.44"	3.12"
SHL512	L170-20 SPST	170°	150°	20°	1.625"	1.44"	3.12"
SHL513	L170-40 SPST	170°	130°	40°	1.88"	2.94"	3.12"
SHL514	L180-40 SPST	180°	140°	40°	1.88"	2.94"	3.12"
SHL515	L200-40 SPST	200°	160°	40°	1.88"	2.94"	3.12"
SHL516	L210-40 SPST	210°	170°	40°	1.88"	2.94"	3.12"
SHL517	L220-50 SPST	220°	170°	50°	1.88"	2.94"	3.12"
SHL518	L250-40 SPST	250°	210°	40°	1.88"	2.94"	3.12"
SHL519	L155-30 SPST	155°	125°	30°	1.88"	2.8"	7.12"
SHL520	L100-20 SPST	100°	80°	20°	1.88"	2.8"	7"
SHL521	L200-20 SPST	200°	180°	20°	1.88"	2.8"	7"
SHL522	L160-20 SPST	160°	140°	20°	1.88"	2.8"	7"
SHL523	L130-20 SPST	130°	110°	20°	1.88"	2.8"	7"
SHL524	L170-20 SPST	170°	150°	20°	1.88"	2.8"	7"
SHL525	L180-20 SPST	180°	160°	20°	1.88"	2.8"	7"

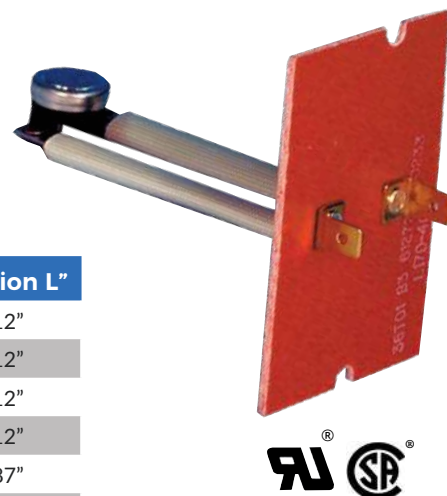

UHS UNIVERSAL HUMIDIFIER SOLENOID VALVE REPLACEMENT KITS

Part No.	Volts	Can Replace
SUHS24	24V	Aprilaire® 4040, General® 990-53, Honeywell® 320016939-002, Skuttle® A01-0814-148
UHS120	120V	Aprilaire® 4005, General® 990-52

- Each kit includes solenoid valve, mounting bracket and all fittings to remove and replace the existing solenoid valve
- Easy "wrench-in" installation
- Adjustable water flow valve
- Economically priced compared to OEM versions



References to original equipment manufacturers' names, models, trademarks and part numbers are used for identification purposes only and SUPCO® replacement products are not in any way affiliated, endorsed or sponsored by such original equipment manufacturers.

WALL THERMOSTATS



A Division Of SUPCO®

WALL THERMOSTATS

- 2 Heat / 2 Cool Heat Pump Systems
- System Powered w/ Battery Backup

MECHANICAL THERMOSTAT



43004A

- Heat / Cool
- Snap Action Switching
- Mercury Free



43005A

DIGITAL THERMOSTAT



43054

- Non-Programmable
- Filter Change Indicator
- Indigo Backlight


5/2 DAY PROGRAMMABLE THERMOSTAT



43154

- Pre-Programmed
- 4 Periods Per Day
- Indigo Backlight

THERMOSTAT GUARDS



Part No.	Description	Part No.	Description
BTG-K	Clear Plastic	BTG-UN	Clear Plastic
BTG-EK	Clear Plastic	BTG-UM	Metal
BTG-RK	Clear Plastic	BTG-UWM	Metal
BTG-RWM	Metal	BTG-54VL	Metal
BTG-UK2	Clear Plastic	BTG-54VLW	Metal

AFFORDABLE THERMOSTATS DESIGNED WITH CONTRACTORS IN MIND

TRANSFORMERS

UNIVERSAL FAN CENTERS



Part No.	VA	Primary VAC	Secondary VAC	HP	Jard®	Mars®	Steveco®
FC4011	40	120	24	3/4	4011FC	24013	90-113
FC4031	40	120/208/240	24	3/4	4031FC	24010	90-130

- DPDT plug-in style relay (90340)
- 40 VA transformer
- Mounts directly to 4" x 4" electrical box
- Color coded wiring for easy installation
- Universal FC4031 includes multi-tap primary voltages for all applications, reduces inventory

UNIVERSAL TRANSFORMER



Part No.	VA	Primary VAC	Secondary VAC	H	W	D	MW
T45	48	120/208/240	2.5, 8, 12, 16 & 24	2 1/16"	3 1/4"	2 3/4"	2 13/16"

- 50/60 Hz.
- Enclosed frame - plate, foot or knock-out mount
- Includes 4"x4" mounting plate, wire nuts, 1/2" conduit & 8" leads

CONTROL TRANSFORMERS



Foot Mount Transformers Specifications

Part No.	Primary V	Secondary VAC	Output VA	Breaker/Fuse	Agency
SXT100R	120/208/240/480	24	100	Breaker	UR®
SXT101	120/208/240	2.5/12/24	40	Fuse	UR®
SXT105	120/208/240	24	40	No	UR®
SXT114	120/208/240	24	20	No	UR® CSA®
SXT115*	120/208/240	24	40	No	UR® CSA®
SXT116	120	24	40	No	UR® CSA®
SXT79R	120/208/240/480	24	75	Breaker	UR®

*Includes Metal Shroud

MULTI-MOUNT TRANSFORMERS SPECIFICATIONS



Part No.	Primary V	Secondary VAC	Output VA	Breaker/Fuse
SXT106	120/208/240	24	40	No
SXT111	120/208/240	2.5/12/24	40	Fuse
SXT113	208/240	40	40	No
SXT148	120/208/240	2.5/12/24	48	No
SXT150	120/208/240	24	50	Fuse



ALLIN LIQUID EYE® MOISTURE REACTORS

- Easy to Read in Minimal Light
- When Moisture is Present, the Color Bars on the Band within the Tube Change Color
- Solid Brass Body
- Shock Resistant Glass
- Available in Flare or Solder
- Color Bar Designed for HFC Refrigerants




ALLIN LIQUID EYE® SIGHT GLASSES

- Unique "See-Thru" feature that is more readable than other Sight Glasses
- Solid Brass Body
- Shock Resistant Glass
- Available in Flare or Solder
- Color Bar Designed for HFC Refrigerants



SSG SERIES MOISTURE INDICATORS



- 3% relative humidity sensitivity
- Maximum Working Pressure (MWP): 680 PSIG

CAPILLARY TUBING & UNIVERSAL TIMERS

BC SERIES BULLET® RESTRICTO CAPILLARY TUBING



Fits ANY Domestic and Commercial Refrigerator, Freezer or Application, Air Conditioner from 1/8 - 5 hp.

- Precision Bore, Plus or Minus .001"
- Specification: ASTM B360

5PAK - INCLUDES BC1, BC2, BC3, BC4, BC5

Standard Service Packs

Part No.	Old Part No.	Length	Description
BC26X16		16 ft.	.026 ID X .071 OD
BC5		10 ft.	.028 ID X .071 OD
BC1	BC31X10	10 ft.	.031 ID X .081 OD
BC36X12		12 ft.	.036 ID X .086 OD
BC2	BC40X12	12 ft.	.040 ID X .093 OD
BC42X12		12 ft.	.042 ID X .093 OD
BC44X12		12 ft.	.044 ID X .093 OD
BC46X12		12 ft.	.046 ID X .093 OD
BC49X11		11 ft.	.049 ID X .093 OD
BC50X11		11 ft.	.050 ID X .093 OD
BC3	BC52X12	12 ft.	.052 ID X .093 OD
BC54X11		11 ft.	.054 ID X .106 OD
BC55X11		11 ft.	.055 ID X .112 OD
BC59X10		10 ft.	.059 ID X .112 OD
BC4	BC64X12	12 ft.	.064 ID X .125 OD
BC70X12		12 ft.	.070 ID X .125 OD
BC75X9		9 ft.	.075 ID X .125 OD
BC80X10		10 ft.	.080 ID X .145 OD
BC85X9		9 ft.	.085 ID X .145 OD
BC90X7		7 ft.	.090 ID X .145 OD

100 Foot Bulk Packs

Part No.	Old Part No.	Length	Description
BC26X100		100 ft.	.026 ID X .071 OD
BC5-100	BC28X100	100 ft.	.028 ID X .071 OD
BC1-100	BC31X100	100 ft.	.031 ID X .081 OD
BC36X100		100 ft.	.036 ID X .086 OD
BC2-100	BC40X100	100 ft.	.040 ID X .093 OD
BC42X100		100 ft.	.042 ID X .093 OD
BC44X100		100 ft.	.044 ID X .093 OD
BC46X100		100 ft.	.046 ID X .093 OD
BC49X100		100 ft.	.049 ID X .093 OD
BC50X100		100 ft.	.050 ID X .093 OD
BC3-100	BC52X100	100 ft.	.052 ID X .093 OD
BC54X100		100 ft.	.054 ID X .106 OD
BC55X100		100 ft.	.055 ID X .112 OD
BC59X100		100 ft.	.059 ID X .112 OD
BC4-100	BC64X100	100 ft.	.064 ID X .125 OD
BC70X100		100 ft.	.070 ID X .125 OD
BC75X100		100 ft.	.075 ID X .125 OD
BC80X100		100 ft.	.080 ID X .145 OD
BC85X100		100 ft.	.085 ID X .145 OD
BC90X100		100 ft.	.090 ID X .145 OD

UNIVERSAL ELECTRONIC DEFROST TIMERS

Part No.	Description	Voltage	Max Compressor Rating	Max Resistive Load (Amps)
UET120	Universal Electronic Timer	120 VAC	1/2 HP	10
UET240	Universal Electronic Timer	120 VAC	1/2 HP	5
EDT10	Electronic Defrost Timer	115 VAC	1/3 HP	10
EDT11	Electronic Defrost Timer	115 VAC	3/4 HP	15
EDT20	Electronic Defrost Timer	208/240 VAC	3/4 HP	5
EDT21	Electronic Defrost Timer	208/240 VAC	3/4 HP	15



COMMERCIAL CONTROLS



S8000 SERIES COMMERCIAL DEFROST CONTROLS

- Heavy-duty synchronous motor
- Adjustable defrost frequency up to 6x/day
- Adjustable Cycle Duration from 4 - 110 min.
- Heavy-duty steel Case

Part No.

X3596 Dial Pins 5 Pins Per Pack

Part No.	Volts (AC)	Paragon®
S804100	120	8041-00
S804120	240	8041-20
S804500	120	8045-00
S804520	240	8045-20
S804521	208/240	8045-21
S814100	120	8141-00
S814120	240	8141-20
S814500	120	8145-00
S814520	240	8145-20



GENERAL PURPOSE TIMER SWITCHES

Part No.	Volts	Switch	Paragon®	Intermatic®	Precision®
ST101	120	SPST	4001-00	T101	CD101
ST102	240	SPST	4002-71	T102	CD102
ST103	120	DPST	4003-00	T103	CD103
ST104	240	DPST	4004-71	T103	CD104
STPIN		Tripper pair		2/bag	



COMMERCIAL DEFROST MECHANISM

6 PER CASE

Part No.	Exact Drop-in Replacement Mechanism for:	Volts
M814500	Paragon® 8145-00, SUPCO® S814500	120
M814520	Paragon® 8145-20, SUPCO® S814520	208/240

CONDENSATE DRAINS



CAST ALUMINUM CONDENSATE DRAINS COMPLETE WITH LONG LIFE HEATING ELEMENT AND MOUNTING LEGS.

Part No.	Capacity	Volts	Watts	Rate	Size
70*	50 oz.	120	300	4 - 5 oz./hr	12 1/4" x 4 3/4" x 3"
75	75 oz.	120	320	14 oz./hr	10" x 9" x 2 3/4"
30-OS	38 oz.	120	160	8 oz./hr	10" x 4" x 2 7/8"
31	500 oz.	120	160	60 oz./hr	10" x 4 1/2" x 3 3/8"

* NSF® Approved

REPLACEMENT FLOATS



CPFLOAT4

- Replaces CP Series Pans
- 4.5" Shaft



CPFLOAT

- Replaces CP Series Pans
- 3" Shaft

COMMERCIAL PAN MICROSWITCH



CPS800

CONDENSATE PANS



Part No.	Capacity	Dissipation Rate Per Day
CP801	1 3/4 qt.	3 gal.
CP802	2 1/2 qt.	6 gal.
CP802-240	2 1/2 qt.	6 gal.
CP804	4 1/2 qt.	6 gal.
CP804-240	4 1/2 qt.	6 gal.
CP804HD	7 1/2 qt.	6 gal.
CP804HD-240	7 1/2 qt.	6 gal.
CP807	7 1/2 qt.	10 gal.
CP807-240	7 1/2 qt.	10 gal.
CP808	15 qt.	8 gal.
CP815	15 qt.	12 gal.
CP815-240	15 qt.	12 gal.
CP816	7 qt.	4.5 gal.
CP817	7 qt.	8 gal.
CP818	7 qt.	8 gal.
CP819	7 qt.	12 gal.
CP820	7 qt.	12 gal.
CP821	15 qt.	12 gal.

PATENTED VALVE GASKET APPLICATION PROVIDES 50 TIMES MORE SEALING AREA THAN COMPETITIVE "O" RING.

BPV SERIES BULLET PIERCING VALVES



Part No.	O.D. Tubing Size	Packaging
BPV31*	1/4", 5/16", 3/8"	12/Box
BPV31D*	1/4", 5/16", 3/8"	48/Box
BPV21*	1/2", 5/8"	8/Box
BPV14	1/4"	12/Box
BPV56	5/16"	12/Box
BPV38	3/8"	12/Box
BPV34	3/4"	1/Box
BPV78	7/8"	1/Box

*BPV21, BPV31 and BPV31D are furnished with adapters for indicated multiple applications

A1 & A2 ADJUSTABLE LINE TAP VALVES



Part No.	Tube Size O.D.	Packaging
A1	1/4", 5/16", 3/8"	12/Box
A2	1/2", 5/8"	12/Box

- Patented Depressor Valve Action
- Mounts in Any Position



SELF-TAPPING WATER VALVE STV2LL

- Fits 3/8" - 1 3/8" O.D. tubing or pipe



CONVENTIONAL "DRILL" TYPE VALVE STV2DLL

- Includes all fittings for 1/4" O.D. Copper and plastic tubing



SELF TAPPING VALVE FTV12

- 3/8" SAE flare

VIBRATION ABSORBERS



- Unique proven design for high pressure applications rated for R410A
- Compatible with all refrigerants
- Burst pressure 2500 (psig)
- 100% helium and hydrogen leak tested



Part No.	Tube Size O.D.	Length	Max Working Pressure PSI
VAS-012	1/2"	8 7/8"	500
VAS-014	1/4"	8"	500
VAS-034	3/4"	10 1/2"	500
VAS-038	3/8"	8 1/2"	500
VAS-058	5/8"	9 3/4"	500
VAS-078	7/8"	11 7/8"	500
VAS-118	1 1/8"	13"	500
VAS-138	1 3/8"	15 1/2"	500
VAS-158	1 5/8"	16 3/4"	500
VAS-218	2 1/8"	20 1/2"	390

DRIERS

LIQUID LINE FILTER DRIERS



Part No.	Part No.
LLD032	LLD163
LLD032S	LLD163S
LLD052	LLD164
LLD052S	LLD164S
LLD053	LLD165
LLD053S	LLD165S
LLD082	LLD304
LLD082S	LLD304S
LLD083	LLD305S
LLD083S	LLD306S
LLD084	LLD307S
LLD084S	

HP SERIES BI-DIRECTIONAL



Part No.
HP083
HP083S
HP163
HP163S
HP164
HP164S
HP165
HP165S

SSLD SERIES SUCTION LINE DRIERS



Part No.	Part No.
SSLD83S	SSLD164
SSLD84S	SSLD305
SSLD85	SSLD305S
SSLD85S	SSLD306S
SSLD165S	SSLD309S
SSLD166S	SSLD419S
SSLD167S	SSLD83
SSLD307S	

CSLD SERIES COMPACT SUCTION LINE DRIERS



Part No.
CSLD1454
CSLD1456
CSLD1457
CSLD1459

DRIERS WITH UV DYE & MAGNETIC FILTERS

Part No.	Replaces
SUD8358	5303918288 & more



SUD SERIES COPPER DRIERS



Part No.
SUD103
SUD109
SUD110
SUD111
SUD112
SUD113
SUD114
SUD115
SUD116

COPPER STRAINERS

Specifically Designed for Re-opened Systems. Each Strainer Contains an Oversized Screen Area for Filtering Large Quantities of burnt out Foreign Matter from System.

Part No.	Inlet	Outlet	O.A. Length	O.D.	Feed
S210	1/4"	.098 Cap Tube	2 3/4"	3/4"	1
S211	1/4"	.125 Cap Tube	2 3/4"	3/4"	1
S212	1/4"	1/4" Copper Tube	2 3/4"	3/4"	1
S214	3/8"	.125 Cap Tube	4 1/2"	5/8"	2
S215	3/8"	.125 Cap Tube	4 1/2"	5/8"	3
S216	3/8"	3/8" Copper Tube	4 1/2"	5/8"	1
S218	3/8"	.125 Cap Tube	4 1/2"	5/8"	1
S219	3/8"	.146 Cap Tube	5"	7/8"	4
S220	3/8"	.112 Cap Tube	4 1/2"	7/8"	6
MD5	1/4"	Cap	1"		
MD6	3/8"	Cap	1"		



CONDENSATE PARTS



RESIDENTIAL / LITE COMMERCIAL NEGATIVE PRESSURE WATERLESS TRAP FCN

- Eliminates the geyser effect that is caused when the standard P-Trap dries out and condensate begins to form
- Requires less than half the height of a standard P-Trap.
- Operates dry except when condensate is being produced
- Will not freeze
- No sludge build-up in bottom of trap
- Easily comes apart for cleaning



RLC051



RLC051C


RESIDENTIAL WATERLESS TRAP

- Prevents air from entering or escaping
- No more "dry-trap"
- Reduces trap height by up to 60%
- Eliminates sludge build-up


POSITIVE & NEGATIVE PRESSURE WATERLESS TRAPS

- Vertical or Horizontal mount
- Allows condensate to drain from HVAC equipment
- Prevents air from entering or escaping the system
- Operates wet or dry
- Schedule 40 Clear PVC or Schedule 40 White PVC

Vertical	Horizontal	Description
PPC34V	NPC34H	3/4", CLEAR
PPC1V	NPC1H	1", CLEAR
PPC114V	NPC114H	1 1/4", CLEAR
PPC112V	NPC112H	1 1/2", CLEAR
PPW34V	NPW34H	3/4", WHITE
PPW1V	NPW1H	1", WHITE
PPW114V	NPW114H	1 1/4", WHITE
PPW112V	NPW112H	1 1/2", WHITE

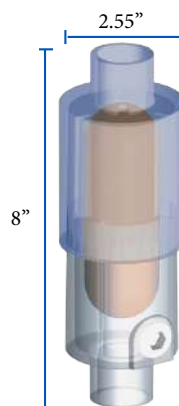


HVAC AIR-TRAP™ WATERLESS TRAPS

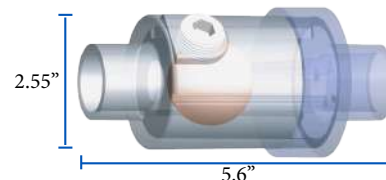

CONDENSATE DRAIN HEATERS

Part No.	Volts	Watts	Size	Leads
SH500	120	11	9"	18"
SH502	120	15	13"	18"
SH503	240	15	13"	18"
SH504	120	25	21"	18"
SH505	240	25	21"	18"



UNIVERSAL DRAIN HEATER

Part No.	Volts	Watts
SH250	120	3



DRAIN PLUS CONDENSATE DRAIN DP34

- Eliminates "dry-trap" Syndrome
- Fits 3/4" drain lines

CONDENSATE PUMPS



High quality, affordable pumps that incorporate audible alarm and an overflow switch that can be used to shut down the system.

SPCP115 & SPCP230

- Available in with 115 or 230 volt
- 22 ft. of lift
- 3 inlet holes



CONDENSATE PUMP DRAIN TUBING

Part No.	Size
CPT3825	3/8 x 25'
CPT38100	3/8 x 100'

INDOOR AIR QUALITY



IAQ50

Wall Mounted
IAQ Monitor
for continuous
monitoring



IAQ55

Handheld IAQ
Monitor for
pinpointing
problem areas



CO1000

CARBON MONOXIDE
METER

- Up to 1000 ppm
- 1 ppm Resolution
- Audible Alarm
- Max and Data Hold
- Backlit LCD
- Boot and carrying case included

SMOKE DETECTORS

DUCTSD



Photoelectric 4-Wire Duct
Smoke Detector

D4120



Photoelectric 4-Wire Duct
Smoke Detector - 120V

D4120W



Watertight Photoelectric
4-Wire Duct Smoke Detector



RTS2-AOS



Multi-Signaling Accessory
with Add-on Strobe

INNOVAIRFLEX® DUCT SAMPLING TUBES

DST



DST1: Ducts up to 1 ft.

DST1.5: Ducts 1.5 ft.

DST2: Ducts to 2 ft.

DST2.5: Ducts to 2.5 ft.

DST3: Ducts 2-4 ft.

DST5: Ducts 4-8 ft.

DST10: Ducts 8-12 ft.

DST22: Ducts 22 ft.

DST34: Ducts to 34 ft.

DST42: Ducts to 42 ft.

WE OFFER THE FULL LINE OF SYSTEM SENSOR® DETECTION



CAPACITOR TESTER

MFD10

- Rubber grips & 12" magnetic leads
- Range: 0.001 μ F to 9999 μ F
- Auto-ranging
- Includes rugged carrying case and alligator clips



ELECTRONIC INSULATION RESISTANCE TESTER

M500

- Check compressor windings before they fail
- Range: 20 - 1,000 Megohms



PROGRAMMABLE REFRIGERANT CHARGING SCALE

PCS220

- Solenoid activated for real-time charging
- Range: 0 - 220 lbs.
- Best Resolution: 0.005 lbs. / 0.1 oz.
- User Programmable Alarms
- Built-in memory



REFRIGERANT CHARGING SCALE

RCS220

- Fast accurate measurements
- Range: 0 - 220 lbs.
- Best Resolution: 0.01 lbs.
- Large LCD display
- Built-in memory



DUAL DIGITAL MANOMETER

DDM55

- Dual Input
- Range: +/-55" H2O
- Hoses, fitting and case incl.



DIGITAL MEGOHMMETER

M1000D

- Large Backlit LCD (3.25" x 2.00")
- Selectable ranges
- 1-year warranty



REFRIGERANT LEAK DETECTOR

HLD200

- < 1 sec reaction
- Sensitivity: 0.1 oz. / yr.
- Audible tick and LED indicators



HVAC CURRENT PROBE

CPH100

- Versatile and accurate



DIGITAL HAND HELD SCALE

DHS55

- 55 lb. Maximum
- Auto Shut Off



DIGITAL PRESSURE GAUGES

	DPG25V	DPG100	DPG1000
Pressure Range	-14.7 to 25 PSI	-14 to 100 PSI	0 to 1000 PSI
Units	InHg, PSI,	PSI, BAR, Kg/cm ² , ATM	PSI, BAR, Kg/cm ² , ATM



ENVIRONMENTAL METER

EM SERIES

- Air Velocity / Air Volume
- Temperature
- Humidity

- Sound
- Light
- Min. / Max. / Avg. / Diff.

- Data Hold
- Backlit LCD
- Auto Power Off
- Carrying Case & Tripod included

Enviro Meters measure critical HVAC/R parameters to maximize productivity and performance.

EM5 MEASURES 5 ENVIRONMENTAL PARAMETERS



TEMPERATURE & HUMIDITY METER

EM10

- Measures Temperature, Humidity & Dew Point
- Temp. Range: 14°F to 122°F
- Humidity Range: 0% to 99.9% RH



THERMO-ANEMOMETER

EM20

- Measures fpm, m/s, mph, km/h, kts, Beaufort Scale, °F / °C
- Velocity Range: 80 - 4000 fpm
- Temperature Range: 14°F to 122°F



TACHOMETER

EM30

- Measures rpm & rps
- Range: 100-30,000 rpm



DUAL DIFFERENTIAL THERMOMETER

EM60

- Dual Thermocouple (J,K) inputs
- Temp. Range (K): -328°F to 2372°F
- Includes two (2) K-type thermocouples



SOUND LEVEL METERS

EM80

- Range: 30 dB to 120 dB



DUAL THERMOMETER

EM90

- IR Range: -58°F to 518°F
- Thermocouple Range (K): -328°F to 2372°F
- Includes one (1) K-type thermocouple



DIGITAL AIRFLOW / VOLUME METER

DAVM+

- Measures Feet per Minute (FPM) and Cubic Feet per Minute (CFM)
- Measures Temperature Humidity and Light Levels (LUX)
- Multi-Channel Display
- Carrying Case Included



DIGITAL PSYCHROMETER

DSP1000

- Temperature / Humidity
- Wet Bulb / Dew Point
- Dual Display
- Max and Data Hold



VOLTAGE DETECTOR W/ LED LIGHT

VDL1000

- Detects 90 - 1000 VAC
- Beeps & flashes RED when voltage detected
- Integrated LED light
- 2 AAA batteries included

DIGITAL MULTIMETER W/ TEMP



DM10T

- 1000 Volts DC
- 750 Volts AC
- 2M w/ resistance
- 10 Amps DC
- Continuity
- Temperature

TEST LEADS WITH ALLIGATOR CLIP



TLA

SUPCO IS THE PIONEER OF AFFORDABLE ELECTRONIC VACUUM GAUGES



DIGITAL VACUUM GAUGE VG64

- Ultra Fine Resolution
- Easy-to-Clean LIFETIME Sensor Never Needs Replacing
- Reads Vacuum in 7 International Units
- Display Updates Every 1/2 Second
- Convenient Built in Hanger
- Low Battery Indicator
- Power Source: 9V Battery (not included)
- Auto Shutoff

SUPCO® WIRELESS VACUUM GAUGE

USE THE POWER OF YOUR MOBILE DEVICE AND THE **SUPCO® TECHLINK™ APP** TO EASILY DOCUMENT SYSTEM EVACUATIONS.

VG640TL

- Remote Bluetooth® monitoring from up to 200 ft. away
- Our revolutionary contaminant and oil resistant Lifetime Sensor
- Record and export the evacuation process to PDF/Excel/CSV
- Includes vacuum coupler and convenient magnetic holding strap



ELECTRONIC VACUUM GAUGE

10 Segment Color Coded LED Readout Provides Fast Response of Vacuum Measurements

VG60

- Pocket Size - Only 5 1/2" x 1 3/4" x 1 1/2"
- Cleanable Sensor
- Single Switch Operation
- Built-in Hanger
- Soft Case Included

VACUUM GAUGE COUPLER FOR ALL VACUUM GAUGES



VGC

- 1/4" Female flare connections
- Brass construction



REMOTE DIAL VAPOR TENSION THERMOMETERS

- Stainless Steel Housing
- Analog Dual Scale Dial °F or °C
- 48" Capillary
- Back Connection Mounting Points
- Temperature Range -40°F to 60°F (-40°C to 16°C)

Part No.	Dial Size	Flange
S6020BB	2"	Back
S6020FB	2"	Front
S6025FB	2.5"	Front
S6020HL	2"	Front
S6025HL	2.5"	Front



SOLAR POWERED LCD THERMOMETER SSDF20

- Stainless steel housing
- Mounting: Surface front flange/ back connection
- Easy to read LCD display
- Range: -60°F to 160°F (-51°C to 71°C)

TEMPERATURE / HUMIDITY PEN THP2



- -4°F to 122°F
- Humidity Range: 10% to 90%



DUAL HAND HELD THERMOMETER PIT6L

- 6:1 Optical Ratio
- IR Range: -4°F to 518°F
- Ambient Range: 32°F to 122°F



DUAL THERMOMETER LIT6P

- 6:1 Optical Ratio
- IR Range: -4°F to 518°F
- Probe Sensor Range: -58°F to 518°F



LASER INFRARED THERMOMETER LIT11TC

- 11:1 Optical Ratio
- -76°F to 932°F



SURE TEMP THERMOMETER ST1236-31

- Assures accurate reading
- Inexpensive solution
- Range: -40°F to 180°F
- Includes mounting hardware



DIGITAL POCKET SURFACE THERMOMETER PT100

- Ultra sensitive probe
- Range: -40°F to 199.9°F
- Accuracy: 0.2 surface, 1.0 air

PT100 - °F
PT100C - °C
PT100H - High Temp °F



THERMO-HYGROMETER W/ CLOCK THC120

- Measures temperature & humidity
- Tabletop or wall mount
- °F/°C switchable



ST06



ST09



ST10



ST11

POCKET AND APPLIANCE THERMOMETERS

Part No.	Description	Temperature Range
ST01	Dial Pocket Thermometer, 1" Dial	40° to 160°F
ST02	Dial Pocket Thermometer, 1" Dial	0° to 220°F
ST03	Refrigerator Thermometer	-20° to 80°F
ST04	Oven Thermometer	100° to 600°F
ST06	Refrigerator Thermometer	-40° to 80°F
ST08	Dial Pocket Thermometer, 1 5/8" Dial	-40° to 160°F
ST09	Digital Pocket Thermometer	-40° to 392°F
ST10	Digital Pocket Thermometer	-50 to 392°F
ST11	Folding Digital Pocket Thermometer	-58° to 572°F

SUPCO® is a trusted distributor of
SUPER LUBE® SYNTHETIC GREASES AND OIL LUBRICANTS



10032

Super Kleen Cleaner/
 Degreaser 1 qt. Trigger
 Sprayer Bottle,
 • 12/case



93003

O-Ring Silicone
 Grease 3 oz. Tube
 • 12/case



31110

Multi-Purpose Synthetic
 Lubricant with Syncolon®
 (PTFE) / 11 oz. Aerosol
 • 12/case



41150

Multi-Purpose Synthetic
 Grease with Syncolon®
 (PTFE) / 14 oz. Cartridge
 • 12/case



51010

Multi-Purpose Synthetic
 Oil with Syncolon® (PTFE)
 / 7 ml. Precision Oiler
 • 12/case



91015

Silicone Dielectric Grease
 400 gram Cartridge
 • 12/case



91003

Silicone Dielectric Grease
 3 oz. Tube
 • 12/case



HIGHSIDE

CLEANERS



SPORE GO® BROAD
 SPECTRUM CLEANER
HS53128

- Cleans Away Mold and Mildew
- Australian Tea Tree oil
- Mitigates Moisture and Water Damage
- Multi-Surface, Broad Spectrum Cleaner
- Coil Cleaner - Evaporator and Condenser
- 4/case



ICEMAX®
 NICKEL SAFE
 ICE MACHINE
 CLEANER
HS50004

• 12 per case



GREEN PAN
 TABS
HS52200

Economical Condensate
 Drain Pan Treatment
 • 12/case



COILMAX®
 COIL
 CLEANER
HS56008

• 16 oz. jar
 • Sold 12/case

PINK STUFF - ACID BASED COIL CLEANER
GREEN STUFF - ALKALINE BASED COIL CLEANER



Part No.	Size	PKG
HS58128	1 gal.	4/case
HS58520	18 oz. can	12/case
HS59128	1 gal.	4/case
HS59520	19 oz. can	12/case



**SUPER FLUSH AC/R
 INTERNAL SYSTEM CLEANER**

12/case	Size	PKG
HS55032	32 oz.	12/case
HS55128	1 gal.	6/case



**SLIMEOUT®
 CONDENSATE PAN
 CONDITIONING TABS**

Part No.	Description	Tablets/Jar
SO100	Slime Out	100
ST200	Slime Tab	200

LEAK LOCK® & LEAK LOCK® GOLD BRUSHABLE PASTE WITH TEFLON JOINT COMPOUND

Leak Lock® No.	Leak Lock® Gold No.	Dimensions
HS10001	HS11001	1-1/3 oz Tube
HS10004	HS11004	4 oz. Brush Top Plastic Jar
HS10016	HS11016	16 oz. Brush Top Plastic Jar

- 12 per case



LEAK LOCK ONE STEP PVC CEMENT

The only no primer, fast setting, all weather low VOC One step PVC Cement

Part No.	Dimensions
HS10604	4 oz. metal bottle
HS10608	8 oz. metal bottle

- Works on WET, dry & flexible pipe
- Allows immediate pressure testing
- Meets ASTM D2564
- 12 per case



THREAD SEALANT

Single Packs
HS10002 - Blue
HS11002 - Gold



HVAC SUPER PRO SOLDERLESS BONDING KIT

HS32098

- 12 per case



JUST FOR COPPER PRO

HS31058

- 12 per case



THREADLOCKER®

HS13001

- 12 per case



HVAC INSTANT PATCH

HS32032

- 12 per case

DETECTORS AND TESTERS



Kit	Name	Description
HS22008	Gas Leak Detect - Low	8 oz. 12/case
HS22032	Gas Leak Detect - Low	32 oz. 12/caseHS
HS23008	Gas Leak Detect - Mid	8 oz. 12/case
HS23032	Gas Leak Detect - Mid	32 oz. 12/caseHS
HS23128	Gas Leak Detect - Mid	Gallon 12/case
HS16001	The Acid Test	4 tests per kit; 12 per case
HS16501	Oil Checker	Two test per kit; 12/case
HS20004	Trace® Leak Detect	4oz. 12/case
HS20016	Trace® Leak Detect	16 oz. 12/case
HS21004	Trace 2® Leak Detect	4 oz. 12/case
HS21016	Trace 2® Leak Detect	16 oz. 12/case

HIGHSIDE® QUICK SERVICE KITS

- 6 per case



Kit	Name	Description
HS18002	Acid Neutralizer	2 oz.
HS18022*	Acid Neutralizer	Kit Refill - 2 pre-charged injectors
HS19002*	PRO-A	Frees sticky expansion valves
HS19022*	PRO-A	Kit Refill - 2 pre-charged injectors
HS60002*	AC Leak Repair	All-in-one lubricator w/ UV dye
HS60022*	AC Leak Repair	Kit Refill - 2 pre-charged injectors
HS21002*	Trace 2	2 oz. pre-charged red UV injector
HS21022*	Trace 2	Kit Refill - 2 pre-charged injectors
HS17002	Thawzone	2oz. pre-charged injector; 4/case
HS17022*	Thawzone	Kit Refill - 2 pre-charged injectors

WHAT DO YOU GET

when you combine the resourcefulness and skill of real HVACR trade technicians with the manufacturing and engineering acumen of SUPCO®?



INNOVATIVE TOOLS FOR THE HVAC LIFE

Our **technician focused line of innovative tools** are one-of-a-kind, resourceful solutions that make life in the HVACR field easier.

Many of our unique tools have been designed by real technicians who've used their sharp and creative "fox-like" skills in the field to invent solutions for common on-the-job problems and approached Supco® to help bring their inventions to life through additional engineering and manufacturing.

JOIN IN ON THE SUPCO® TRADEFOX™ SOCIAL BUZZ:



@sealedunitpartscsco



@supco_hvac



ROUND FUSES. SPADE FUSES. ONE KIT GETS THE JOB DONE

FUSE TESTING SUPER KIT BRKPRO

- Six piece kit
- (1) Standard Blade to 1/4" Fuse Adapter
- (1) Standard Blade to 5mm Fuse Adapter
- (1) Standard Blade to 4.5mm Fuse Adapter
- (1) Supco® Fuse Pro 3 AMP Tester with Light
- (1) Supco® Fuse Pro 5 AMP Tester with Light
- Auxiliary Wire Harness



BELT-JACK INSTANT BELT TIGHTENER BJ10



- Opens from 4 1/2" to 15" with extender
- Heavy Duty 3/8"- 16 threads per inch



FURNACE PRO (6 PACK) FPRO100

- Holds in door switch for troubleshooting furnaces, air handlers, etc.
- Hands-free



MAGNETIC TEST LEADS

YELLOW - MAG1YL
BLUE - MAG1BL
BLACK - MAG1BK
GREEN - MAG1GR
RED - MAG1RD

- Ideal for low voltage, 30V
- Powerful magnets
- 20" wire length



HYBRID JUMPER HYB1YL

- 20" lead
- Used for low voltage troubleshooting
- For use up to 30 volts / 5 amps
- Magnetic tips & alligator clips

RETRACTABLE MAGNETIC JUMPER MAGTRACT



- For diagnostic use only
- 20" leads
- For use up to 30V / 5A



NEOPRENE AIR TUBING (BLACK)

- Use with air pressure switches
- Temperature Range: 0°F to 160°F (-17°C to 71°C)
- Pressure Range: -20 to 20 in. W.C.

Part No.	Dimensions	Length
SNAT3165	3/16" I.D.	5 ft.
SNAT316100	3/16" I.D.	100 ft.
SNAT185	3/16" I.D.	5 ft.

FUSE PRO BREAKERS



- Two available sizes: 3 or 5 amp
- Plugs directly into PC boards
- Built in light for dark control board locations
- Eliminates wasted fuses

Part No.	Description
BRK3	3 Amp Breaker
BRK5	5 Amp Breaker

UNIVERSAL MOTOR TESTER

ECMPRO



- 24 VAC operating voltage & indicating light
- 24" wire length
- Short circuit protection
- Convenient magnet on back of unit
- No batteries required



BEARING BUSTER

- Reduces bearing replacement time
- Slide hammer action
- Breaks bearing loose from shaft and bracket

BB34 for 3/4" Shafts
BB10 for 1" Shafts
BB114 for 1-1/4" Shafts



PROOF IN PERFORMANCE

RAKE-LIKE HEAD HELPS ELIMINATE AIRBORNE DUST AND CLEAN MORE EFFECTIVELY



COIL CLEANING BRUSH

CCB100

- Adjustable brush head pivots up to 120°
- Patented stiffness adjustment slide
- Two tempered stainless steel cleaning heads built into a single unit
- Handles extends to 4 ft.

COMPRESSOR LEAD KIT

EC10



- Kit Includes Three Leads:
- Three - 23", 10 AWG Wires
- Flag Female Compressor Terminal (.250 tab)
- Waterproof Butt Connector (12-10 Wire Range) & sandpaper



FLAME SENSOR CLEANER

FSC10

- Easily cleans sensor
- Prevents false starts
- Convenient key ring

FLEXIBLE VALVE CORE TOOL

FVCT4



- 4 1/2 inches in length
- Flexible to over 120° angle
- CNC finished

FLEXIBLE VALVE CORE TOOL W/ STORAGE

FVCT4PLUS



- 4 7/8 inches in length
- Flexible to over 120° angle
- CNC finished
- Comes with 3 valve cores

VALVE CORE GRIPPER TOOL W/ GASKET INSTALLER

VCCT3



- 3.5 inches in length
- Integrated key ring
- CNC finished

THE BUZZ IS REAL

THIS IS THE UMBRELLA TECHS WANT



MAGNETIC UMBRELLA KIT

MUKIT

- Includes umbrella & base
- 60" wide
- Waterproof umbrella with durable and flexible fiberglass ribs
- Base swivels and locks
- Heavy-duty magnet attaches securely to any metal housing and holds up to 210 lbs.



IMAGE CREDIT: Mike Mayberry AKA @hvac_refer_guy

ATPSTRAP
Replacement Strap
Available



ATTIC PRO UTILITY LIFT ATP1

- Adjustable beam distance from 14" to 24"
- 20 ft. cable
- Lifts up to 250 lbs.
- Includes carrying case & straps



JONES VALVE® CONDENSATE CLEANOUT JV1

- Most compact size on the market
- No cutting or repairing drain line
- Single Schrader allows for one hose hook-up
- 1/4" hose connection, 3/4" condensate line



SEE IT IN ACTION AT
[YOUTUBE.COM/SEALEDUNITPARTSCO](https://www.youtube.com/SEALEDUNITPARTSCO)

PVC FLUE CAP ECAP321



- Resistant to heat, cold, precipitation or UV radiation
- Protects furnace motor and interior from damaging moisture, debris and pests
- Precisely and quickly fits 1.5", 2" and 3" PVC pipe



CAPACITOR SHELF WITH MAGNET CSWM1

- Capacitor Shelf With High Strength Magnet

4-PACK CAPACITOR SHELF CSX4

- Capacitor Shelf (4 Pack)
- Includes Cable Ties & Mounting Screws

DITCH THE SCREWDRIVERS DISCHARGE CAPACITORS SAFELY

CAP DISCHARGE PEN CAPDIS

- LED Indicator When Capacitor is Charged
- Standard Magnetic Connector or Alligator Clip Adapter



THE INVENTION THAT'S #TRENDING

COOLPRESSOR HIGH-POWERED MAGNETIC COMPRESSOR COOLER CPPRO



- Uses High Powered Magnet and Garden Hose
- Hands Free
- Saves Time
- Creates a Powerful Cascade of Water
- No Messy Backsplash



THE DAUBER STOPPER™ A/C DRAIN LINE GUARD DS1

- Four-bolt flange or pipe reducer for easy installation
- Provides finished appearance to home
- Durable ABS material
- UV protection with 10 year warranty
- Made in the USA

FP18



FP48

FILTER PULLERS

- Makes getting hard to reach filters easy
- FP18: 18" extension
- FP48: 48" extension



The 11lb Powerhouse **PORT-A-BLASTER®** Coil Cleaning Machine

Whether it's up on a roof or inside on a mini-split, the Port-a-Blaster® is ready to perform with two adjustable pressure settings and a price that's as comfortable as its weight.

- Low pressure for indoor cleaning; high pressure for outdoor cleaning
- Up to 140 PSI
- Extremely light weight and portable
- Includes all accessories (trigger sprayer, wand/nozzle and hoses) which are conveniently stored in an on-board storage compartment

ZPB140



"At 11 lbs, if I'm going to lug a pressure washer up to a roof, this is the one I'm bringing." – @mikeclarkhvac

MINI-SPLIT CATCH ALL™

Protect surrounding areas with this fully adjustable bib that works with indoor mini-split evaporator coils, ceiling cassette units or wall-mounted mini-split condenser coils.

- Fully adjustable from 47" x 25" for wall unit, to 47" x 47" for ceiling units
- Durable construction and material for multi-use
- Includes storage and carry bag

ZCA24



IMAGE CREDIT: @chris_the_fridgee

"The best mini-split cleaning bib I have ever used." – @chris_the_fridgee