



MASON INDUSTRIES, Inc.


Manufacturers of Vibration Control Products
 350 Rabro Drive 2101 W. Crescent Ave., Suite D
 Hauppauge, NY 11788 Anaheim, CA 92801
 631/348-0282 714/535-2727
 FAX 631/348-0279 FAX 714/535-5738
 Info@Mason-Ind.com Info@MasonAnaheim.com
 www.Mason-Ind.com

JOB NAME _____
 CUSTOMER _____
 CUSTOMER P.O. _____
 MASON M.I. _____
 DWG. NO. _____

**Super
W**
Waffle Pad

MATERIAL:

- ☐ Natural Rubber
☐ Standard Neoprene
☐ AASHTO Bridge
 Bearing Neoprene

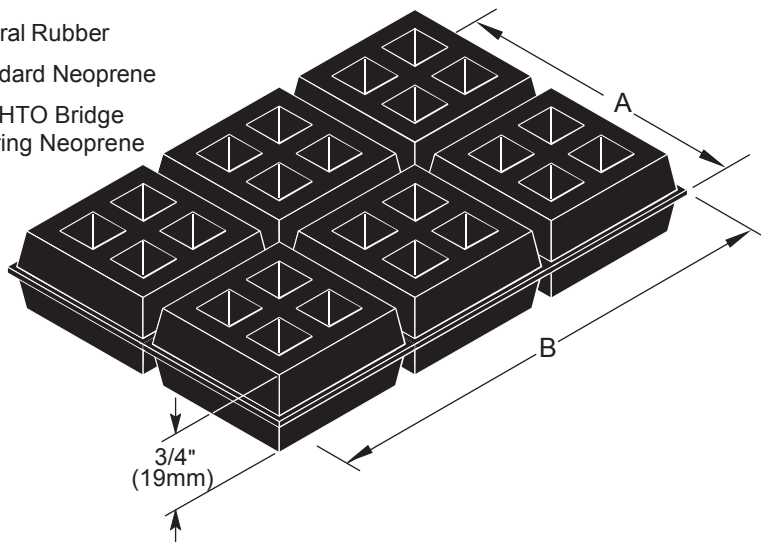


FULL SIZED SHEETS
 are 18 x 18 x 3/4" (450 x 450 x 19mm) consisting of
 81 - 2" (50mm) square modules.
 Actual pad sizes are as scheduled below.

TYPE Super W LOAD RATINGS per SQUARE

Durometer	Recommended Load per 2x2" sq.		Recommended Load per Area			Maximum Load per Area		
	(lbs)	(kg)	(lbs/in ²)	(kg/mm ²)	{kPa}	(lbs/in ²)	(kg/mm ²)	{kPa}
Standard	30	80	35	20	.014	138	27	.019
	40	120	55	30	.021	207	40	.028
	50	180	80	45	.032	310	60	.042
	60	240	110	60	.042	414	80	.056
	70	360	165	90	.063	621	120	.084

Load Deflection Curves

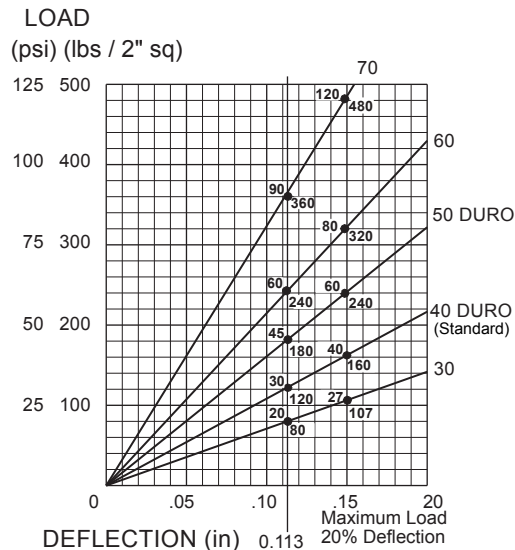

Note:
 Graph shown is for a single layer
 of 2" x 2" Super W Pad

PLAN VIEW OF PAD LOCATION :

TAG : _____
 UNIT : _____



Durometer of Pad Material to be:		DURO
1 :	6 :	
2 :	7 :	
3 :	8 :	
4 :	9 :	
5 :	10 :	
Sets Required:		

Type SUPER W Dimensions inches (mm)

A	B