



Submittal Data Information

FloodBreaker™ Whole House Water Shut Off

101-161

Effective: June 1, 2013

Supersedes: New

Job: _____ Engineer: _____ Contractor: _____ Rep: _____

ITEM NO.	MODEL NO.	

Features

Programmable Leak Detection Settings
Programmable Vacation Mode Leak Settings
Audible Alarm
Floor Sensor
Output Contact
Input Contact
Operates on Batteries and 9V DC Power Supply
Reduces Property Damage
Push Button Reset
Mounts in Horizontal or Vertical Pipe

Performance

Max. Flow: 15.5 gpm (58.7 L/Min)
Caution: Flow should never exceed standards for pipe size.
Max. Water Temperature 86°F (30°C)
Max. Inlet Pressure: 230 psi (15.9 Bar)
Power Supply 9V DC
(4) AA Batteries
Connection Sizes: 3/4", 1", 1-1/4" NPT

Materials



Body: Brass ≤ .25% lead
Internal Components:
Brass ≤ .25% lead
Acetal
Nylon
Seals: EPDM

Approvals



Application


The Taco FloodBreaker is a whole house adjustable leak detection system that monitors several aspects of water usage. It shuts off the water supply once any of the monitored settings are reached. Use FloodBreaker to protect homes from water damage, eliminate waste and protect unoccupied or vacation properties. Not only can it protect against a large catastrophic leak but is capable of protecting against the small unnoticed leak that could go on for weeks, months or even indefinitely.

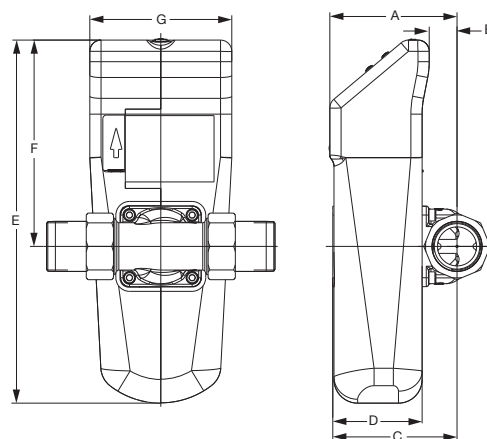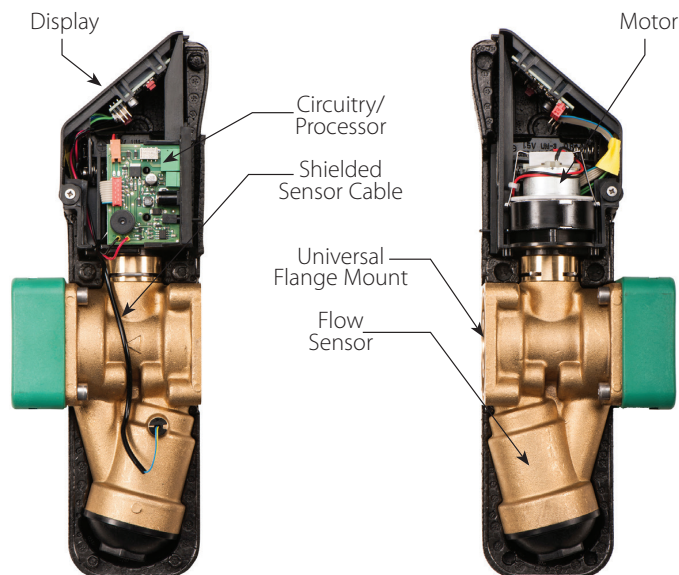

FloodBreaker™ Dimensions

DIMENSIONS (For reference only)	In.	mm
A	4-1/4	108
B	15/16	24
C	4-1/8	105
D	3	76
E	12-3/32	307
F	6-55/64	174
G	4-47/64	120

The universal body assembly can be installed into either a vertical or horizontal pipe line as shown



TACO INC., 1160 Cranston Street, Cranston, RI 02920 Telephone: (401) 942-8000 Fax: 942-2360
TACO (Canada), Ltd., 6180 Ordan Drive, Mississauga, Ontario L5T 2B3 Telephone: (905) 564-9422 Fax: (905) 564-9436
Visit our website at: www.taco-hvac.com

Printed in USA
Copyright 2014
TACO, Inc.