Commercial Pressure and Float Switches for Power Circuits

Class 9013, 9036, 9037 and 9038

Catalog

Simply easy!™

PUMPTROL™

Telemecanique Sensors

Table of contents

Selection Guide — Pumptrol™ Commercial Pressure Switches 4
Class 9013 Electro mechanical, Conforming to UL508 and CSA 4

Selection Guide — Float Switches 6
Class 9036 TypeD — Open Tank, General Purpose 6
Class 9036 Type G — Open Tank, Heavy Duty 7
Class 9049 — Accessories for Class 9036 Type D and G 8
Class 9036 Type FG — Open Tank, Pedestal Style 9
Class 9049 Type UMS1 — Universal Mounting Plate 9
Class 9037 Type E — Closed Tank, Flange Mounted 10
Class 9037 Type H — Closed Tank with Bushing 11
Class 9038 Type A — Mechanical Alternator, Open Tank 12
Class 9038 Type C — Mechanical Alternator, Closed Tank 13
Class 9038 Type D — Mechanical Alternator, Closed Tank 14

Electromechanical Pressure Switches, Class 9013 Types F and G 16
Introduction 16
Settings 17
General Specifications
Types FSG/FSW, FTG/FTW, and FYG/FYW 18
Types FRG, FHG, and G 19
Interpretation of the Catalog Number
Class 9013 Type F Water Pump Switches 20
Class 9013 Type F Air Compressor Switches 21
Class 9013 Type G Pressure Switches 22
Selection and Specifications 23
Dimensions 39

Float Switches — Class 9036, 9037, and 9038 40
Introduction 40
Class 9036 Open Tank 40
Class 9037 Closed Tank 41
Class 9038 Mechanical Alternators 41
Selecting a Float Switch 42
Selecting Floats and Rods 42
Temperature Ratings 43
Electrical Ratings 43
Class 9036 Type D and G Open Tank Float Switches 44
Class 9036 Type FG and Class 9049 Accessories 47
Class 9037 Type E Closed Tank Float Switches 48
Class 9037 Type E Flange-Mounted Float Switches 48
Class 9037 Type E Closed Tank Rod Kits 50
Position 2 Operation 51
Position 3 Operation 51
Class 9037 Type H with Screw-in Bushing 52
Class 9038 Type A Mechanical Alternators 54
Class 9038 Type A Open and Sump Tank Mechanical Alternators 54
Class 9038 Type C Mechanical Alternators with Bushing 56
Class 9038 Type D Flange-Mounted Mechanical Alternators 58
Class 9049 Rod Kits for Class 9038 Type D 59
Class 9049 Accessories and Class 9998 Renewal Parts Kits 62

For the complete technical specifications of the products, please refer to our website. For professional use.

© 2023 All rights Reserved

Selection Guide — Pumptrol™ Commercial Pressure Switches

Class 9013 Electro mechanical, Conforming to UL508 and CSA

Pumptrol Family		9013FSG	9013FTG	9013FYG
Applications	**Type of Installation**	Power circuit	Power circuit	Power circuit
	Controls	Fresh or sea water	Fresh or sea water	Fresh or sea water
	Type of Operation	Regulation between 2 thresholds (adjustable differential). Suitable for all pumps.	Detection of a single threshold (non-adjustable differential)	Regulation between 2 thresholds (adjustable differential). For higher hp and pressure requirements.
Size / Range	**psi**	20–80	20–65	25–80
	bar	1.38–4.48	1.38–4.48	1.72–5.52
Conforming to Standards		NEMA A600 UL508	UL508	NEMA A600 UL508
Product Certifications		UL,CSA	UL,CSA	UL,CSA
Dimensions (l x h x w) in inches (mm)		3.76 x 2.8x2.78 (95.5 x 71.12x70.6)	3.76 x 2.8x2.78 (95.5 x 71.12x70.6)	3.76 x 2.8x2.78 (95.5 x 71.12x70.6)
Contact Blocks (snap action contacts)		2 N.C.	2 N.C.	2 N.C.
DegreeofProtection		NEMA Type 1, NEMA Type 3R, and IP20	NEMA Type 1, NEMA Type 3R, and IP20	NEMA Type 1, NEMA Type 3R, and IP20
Connections	**Electrical**	Screw terminals	Screw terminals	Screw terminals
	Fluid	Multiple	Multiple	Multiple
Cable Entries		2	2	2
Catalog Numbers		**9013FSG*** **	**9013FTG*** **	**9013FYG*** **
Specifications		Page 16	Page 16	Page 16
Interpretation of Catalog Numbers		Page 18	Page 18	Page 18
Other versions: **Form B7, one grommet, CE** **Form B8, two grommets, CE** **NOTE:** Inclusion of B7 or B8 grommets will negate UL/CSA approvals for the device, but they may be used for applications which do not require UL/CSA approvals.		— —	— —	— —

© 2023 All rights Reserved

Pumptrol Family		9013FRG	9013FHG	9013G
Applications	**Type of Installation**	Power circuit	Power circuit	Power circuit
	Controls	Fresh or sea water	Air only	Water or air
	Type of Operation	Reverse acting, contacts open on falling pressure (adjustable differential)	Control of electrically driven air compressors, contacts open on rising pressure (fixed differential, adjustable cut-out), diaphragm actuated	Light industrial, with higher electrical ratings for direct control of motors in pumps and compressors, contacts open on rising pressure (adjustable differential)
Size / Range	**psi**	8–150	40–200	10–250
	bar	0.41–10.34	2.76–13.79	0.69–17.24
Conforming to Standards		NEMA A300 UL508	NEMA A600 UL508	NEMA A600 UL508
Product Certifications		UL,CSA	UL,CSA	UL,CSA
Dimensions (l x h x w) in inches (mm)		3.76 x 2.8 x 2.78 (95.5 x 71.12 x 70.6)	3.76 x2.8x2.78 (95.5 x 71.12 x 70.6)	3.68 x 3.85 x 3.44 (93.47 x 97.79 x 87.37)
Contact Blocks (snap action contacts)		2 N.O.	2 N.C.	2 N.C.
Degree of Protection		NEMA Type 1, NEMA Type 3R, and IP20	NEMA Type 1, NEMA Type 3R, and IP20	NEMA Type 1, NEMA Type 3R, NEMA Type 7, NEMA Type 9, and IP20
Connections	**Electrical**	Screw terminals	Screw terminals	Screw terminals
	Fluid	Multiple	Multiple	Multiple
Cable Entries		2	2	3 knock-outsavailable
Catalog Numbers		**9013FRG•••**	**9013FHG•••**	**9013G•••**
Specifications		Page 16	Page 16	Page 16
Interpretation of CatalogNumbers		Page 19	Page 19	Page 19
Other versions: **Form B7, one grommet, CE** **FormB8,twogrommets,CE** **NOTE:** Inclusion of B7 or B8 grommets will negate UL/CSA approvals for the device, but they may be used for applications which do not require UL/CSA approvals.		— —	— —	— —

© 2023 All rights Reserved

PUMPTROL™

Selection Guide — Float Switches

Class 9036 TypeD — Open Tank, General Purpose

Type of Installation	**Horsepower rated**		
Product Features	**2-poles witch, lever operated** **Standard action — contacts close on liquid rise** **Reverse action — contacts open on liquid rise**		
Fluids Controlled	Water, hydraulic oils, corrosive fluids		
Fluid Characteristics	Fresh water, sea water, hydraulic oils, and corrosive fluids with a density ≥ 0.8		
Contact Arrangement	**Standard:** 2 N.O. (DPST), **Form R:** 2 N.C. (DPST), **Form H:** 1 N.O. and 1 N.C. (SPDT)		
Degree of Protection	NEMA Type1	NEMA Type 4	NEMA Type 7,9
Electrical Connection	4 screw terminals, 3 knockouts for 1/2 in. conduit entry	4 screw terminals, 2 cable entries, 3/4-14 conduit entry	
Ambient Temperature	–22 to + 200 °F (–30 to+93°C)		
Catalog Numbers	**9036DG...**	**9036DW...**	**9036DR...**
Page	44		

© 2023 All rights Reserved

Class 9036 Type G — Open Tank, Heavy Duty

Type of Installation	**Horsepower rated**
Product Features	**2-pole switch** **Standard action — contacts close on liquid rise** **Reverse action — contacts open on liquid rise**

Fluids Controlled	Water, hydraulic oils, corrosive fluids		
Fluid Characteristics	Fresh water, sea water, hydraulic oils, and corrosive fluids with a density ≥ 0.8		
Contact Arrangement	**Standard:** 2 N.O. (DPST), **Form R:** 2 N.C. (DPST), **Form H:** 1 N.O. and 1 N.C. (SPDT)		
Degree of Protection	NEMA Type 1	NEMA Type 4	NEMA Type 7, 9
Electrical Connection	4 screw terminals, 3 knockouts for 1/2 in. conduit entry	4 screw terminals, 2 cable entries, 3/4-14 conduit entry	
Ambient Temperature	–22 to +200 °F (–30 to +93 °C)		
Catalog Numbers	**9036GG...**	**9036GW...**	**9036GR...**
Page	44		

© 2023 All rights Reserved

Class 9049 — Accessories for Class 9036 Type D and G

Accessory Kits	Tapped-at-Top Floats (#304 SS) [1]		Center-Hole Floats (#304 SS) [2]		Additional Tubing [3]	
Tubing (rods)	5 ft brass	5 ft SS	5 ft brass	5 ft SS	2.5 ft brass	2.5 ft SS
Net buoyancy in water 7 in. float [4]	60	60	70	70	—	—
Total weight of stops oz (g)	3 (85)	3 (85)	6 (170)	6 (170)	—	—
Number of stops	2	2	4	4	—	—
Weight of the included 5 ft rod oz (g)	18.5 (524)	16.9 (479)	18.5 (524)	16.9 (479)	—	—
Weight per ft of extra rod oz (g)	3.7 (105)	3.4 (96)	3.7 (105)	3.4 (96)	3.7 (105)	3.4 (96)
Catalog Numbers	**9049A6**	**9049A6S**	**9049A6C**	**9049A6CS**	**9049T1**	**9049T1S**

[1] Maximum recommended tubing length for tapped-at-top float: 12.5 ft (3810 mm).

[2] Maximum recommended tubing length for center-hole float: 30 ft (9144 mm).

[3] Additional tubing kits add on to float accessory kits and include a connector.

[4] Net buoyancy calculated with the float 80% submerged, allowing for a 20% operating margin. Buoyancy data calculated for use in water. Contact the Sensor Competency Center for buoyancy data in media having a specific gravity different than water (1.0).

NOTE: When ordering float accessories, first specify the desired accessory kit, then as a second item, give the catalog number and the quantity of the additional tubing kits required. For example, for a 9049A6C kit with 15 ft of tubing, specify:

- 9049A6C, quantity = 1 (float with 5 ft of tubing)
- 9049T1, quantity = 4 (2.5 ft of tubing each, for a total of 10 additional ft)

Compensating Spring

Compensating springs support the weight of long rods that cannot be supported by center-hole floats.

Example

Calculation example	**Float buoyancy**	70.0 oz
Measuring 15 ft of tank depth	**Total weight**	(61.5 oz)
System has 15 ft of brass rod, 4 stops, and a center hole float.	Weight of stops:	(6.0 oz)
	Weight of 5 ft of brass rod (included):	(18.5 oz)
Buoyancy is positive, so no compensating spring is required	Weight of 10 ft of brass rod (separate):	(37.0 oz)
	Buoyancy	8.5 oz

© 2023 All rights Reserved

Class 9036 Type FG — Open Tank, Pedestal Style

Type of Installation	Horsepower rated		
Product Features	**2-pole switch, forward or reversing** **Contacts open or close on liquid rise (field convertible)**		
Fluids Controlled	Water, hydraulic oils, corrosive fluids		
Fluid Characteristics	Fresh water, sea water, hydraulic oils, and corrosive fluids with a density ≥ 0.8		
Contact Arrangement	2 N.O. or 2 N.C. (DPST), depending on rod connection		
Degree of Protection	NEMA Type 1		
Electrical Connection	4 screw terminals, 2 cable entries 0.88 in. (22.4 mm) with 0.84 in. (21.3 mm) across flat		
Ambient Temperature	–22 to +200 °F (–30 to +93 °C)		
Catalog Numbers	**9036FG**	**9049A60**	**9049A61**
Description	2-pole, pedestal-style sump pump switch	Plastic, center-hole float	33.75 in. aluminum rod, 2 float stop assemblies, and attaching hardware
Page	46		

NOTE : Also available in batch of 250 pcs : “Add C250” at the end of your reference

Class 9049 Type UMS1 — Universal Mounting Plate

Description	Mounting plate
Product Features	Pedestal mount
Material	Cold rolled steel
Finish	Painted, powder coated
Mounting Connection	Threaded to accept 1 in. diameter iron pipe
Catalog Numbers	**9049UMS1**

Figure 1: 9049UMS1 Dimensions

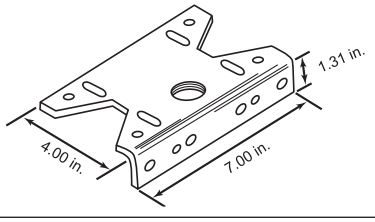

PUMPTROL™

© 2023 All rights Reserved

Telemecanique Sensors

Class 9037 Type E — Closed Tank, Flange Mounted

Type of Installation	**Horsepower rated**
Product Features	**2-pole switch** **Standard action — contacts close on liquid rise** **Reverse action — contacts open on liquid rise**

Fluids Controlled	Water, hydraulic oils, corrosive fluids		
Fluid Characteristics	Fresh water, sea water, hydraulic oils, and corrosive fluids with a density ≥ 0.8		
Contact Arrangement	Standard: 2 N.O. (DPST), Form R: 2 N.C. (DPST)		
Degree of Protection	NEMA Type 1	NEMA Type 4	NEMA Type 7, 9
Electrical Connection	4 screw terminals, 3 knockouts for 1/2 in. conduit entry	4 screw terminals, 2 cable entries, 3/4-14 conduit entry	
Ambient Temperature	–22 to +200 °F (–30 to +93 °C)		
Catalog Numbers	**9037EG...**	**9037EW...**	**9037ER...**
Page	48		

NOTE: For float and rod kits, refer to page 50.

© 2023 All rights Reserved

Class 9037 Type H — Closed Tank with Bushing

Type of Installation	**Horsepower rated**		
Product Features	**2-pole switch** **Standard action — contacts close on liquid rise** **Reverse action — contacts open on liquid rise**		
	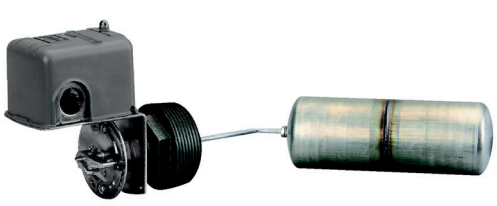 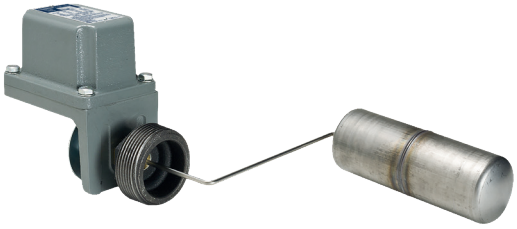		
Fluids Controlled	Water, hydraulic oils, corrosive fluids		
Fluid Characteristics	Fresh water, sea water, hydraulic oils, and corrosive fluids with a density ≥ 0.8		
Contact Arrangement	**Standard:** 2 N.O. (DPST). **Form R:** 2 N.C. (DPST). [1]		
Degree of Protection	NEMA Type 1	NEMA Type 4	NEMA Type 7, 9
Electrical Connection	4 screw terminals, 3 knockouts for 1/2 in. conduit entry	4 screw terminals, 2 cable entries, 3/4-14 conduit entry	
Ambient Temperature	–22 to +200 °F (–30 to +93 °C)		
Catalog Numbers	**9037HG...**	**9037HW...**	**9037HR...**
Page	52		

[1] NEMA Type 1 devices can be fiel d modified for reverse action. NEMA Type 4, 7, and 9 devices cannot be field modified for reverse action.

© 2023 All rights Reserved

Class 9038 Type A — Mechanical Alternator, Open Tank

Type of Installation	**Horsepower rated**		
Product Features	**4-pole switch** **Standard action — contacts close on liquid rise** **Reverse action — contacts open on liquid rise**		

Fluids Controlled	Water, hydraulic oils, corrosive fluids		
Fluid Characteristics	Fresh water, sea water, hydraulic oils, and corrosive fluids with a density ≥ 0.8		
Contact Arrangement	4 N.O. (2 DPST)		
Degree of Protection	NEMA Type 1	NEMA Type 4	NEMA Type 7, 9
Electrical Connection	8 screw terminals, 4 knockouts for 1/2 in. or 3/4 in. conduit entry	8 screw terminals, 2 cable entries, 3/4-14 conduit entry	
Ambient Temperature	–22 to +200 °F (–30 to +93 °C)		
Catalog Numbers	**9038AG...**	**9038AW...**	**9038AR...**
Page	54		

© 2023 All rights Reserved

Class 9038 Type C — Mechanical Alternator, Closed Tank

Type of Installation	**Horsepower rated**		
Product Features	**4-pole switch** **Standard action — contacts close on liquid rise** **Reverse action — contacts open on liquid rise**		
Fluids Controlled	Water, hydraulic oils, corrosive fluids		
Fluid Characteristics	Fresh water, sea water, hydraulic oils, and corrosive fluids with a density ≥ 0.8		
Contact Arrangement	4 N.O. (2 DPST), alternating contacts		
Degree of Protection	NEMA Type 1	NEMA Type 4	NEMA Type 7, 9
Electrical Connection	8 screw terminals, 8 knockouts for 1/2 in. or 3/4 in. conduit entry	8 screw terminals, 2 cable entries, 3/4-14 conduit entry	
Ambient Temperature	–22 to +200 °F (–30 to +93 °C)		
Catalog Numbers	**9038CG...**	**9038CW...**	**9038CR...**
Page	56		

© 2023 All rights Reserved

Class 9038 Type D — Mechanical Alternator, Closed Tank

Type of Installation	**Horsepower rated**		
Product Features	**4-pole switch** **Standard action — contacts close on liquid rise** **Reverse action — contacts open on liquid rise**		

Fluids Controlled	Water, hydraulic oils, corrosive fluids		
Fluid Characteristics	Fresh water, sea water, hydraulic oils, and corrosive fluids with a density ≥ 0.8		
Contact Arrangement	4 N.O. (2 DPST)		
Degree of Protection	NEMA Type 1	NEMA Type 4	NEMA Type 7, 9
Electrical Connection	8 screw terminals, 8 knockouts for 1/2 in. or 3/4 in. conduit entry	8 screw terminals, 2 cable entries, 3/4-14 conduit entry	
Ambient Temperature	–22 to +200 °F (–30 to +93 °C)		
Catalog Numbers	**9038DG...**	**9038DW...**	**9038DR...**
Page	58		

© 2023 All rights Reserved

Type of Installation	Float Kits				Float Rod Kits					
Material	#304 SS	#316 SS	#304 SS	#316 SS	—	—	—	—	—	
Dimensions, in. (mm) Diameter x Length	3.625 x 4.5 (92 x 114)	3.625 x 4.5 (92 x 114)	2.5 x 7 (64 x 178)	2.5 x 7 (64 x 178)	—	—	—	—	—	
R Dimension, in. (mm)	—	—	—	—	1.75 (44)	2.50 (64)	3.25 (83)	5.25 (133)	7.25 (184)	12.25 (311)
H Dimension, in. (mm)	—	—	—	—	8.25 (210)	9.00 (229)	9.50 (241)	11.75 (298)	13.75 (349)	18.75 (476)
Catalog Numbers	**9049EF1**	**9049EF2**	**9049HF3**	**9049HF4**	**9049ER1**	**9049ER2**	**9049ER3**	**9049ER5**	**9049ER7**	**9049ER12**
Pages	48-58-62				48-50-51-59-60-61-62					

Figure 2: Float and Rod Kits

9038DG shown with rod kit 9049ER5 and float kit 9049EF1 installed

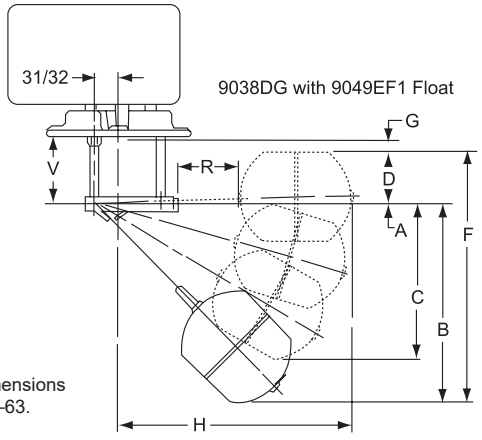

For additional dimensions refer to pages 61–63.

© 2023 All rights Reserved

PUMPTROL™

Electromechanical Pressure Switches, Class 9013 Types F and G

Introduction

The Pumptrol Class 9013 Type F commercial pressure switches are UL Listed and CSA certified as commercial control equipment. Type G pressure switches are UL Listed and CSA certified as commercial / light industrial control equipment.

The Type FHG compressor pressure switch is used to control electrically driven air compressors. It is diaphragm actuated, and its contacts open on rising pressure.

The Type FSG, FTG, FYG, and FRG water pump pressure switches are used to control electrically driven water pumps. They are diaphragm actuated.

- The Type FSG standard water pump switch is suitable for all types of pumps, including jets, submersible, and reciprocating.
- The Type FTG fixed differential water pump switch is suitable for all types of pumps, including jets, submersible, and reciprocating. It is an ideal choice for OEM markets. Minimum quantity restrictions apply.
- The Type FYG is designed to meet higher horsepower and pressure requirements.
- The Type FRG is reverse acting: the contacts open on falling pressure.

The Type G commercial / light industrial pressure switch is used to control electrically driven water pumps and air compressors. It has higher electrical ratings for direct control of motors in pump and compressor applications. The Type G switch is diaphragm actuated, and its contacts open on rising pressure.

Setting Points

Every pressure switch has two setting points: one on rising pressure and one of falling pressure. For pumps and compressors, the setting point on rising pressure is called the trip point or cut-out; the setting point on falling pressure is called the reset point or cut-in.

Differential

The differential is the difference in pressure between the trip point (cut-out) and the reset point (cut-in). It can be adjustable or fixed. **Example** — Cut-in (30 psi) / Cut-out (50 psi): Differential = 20 psi

Range

The range indicates the pressure limits within which the settings can be adjusted. The range is referenced to the setting point on rising pressure (trip point). The differential subtracts from the trip point setting. When using a diaphragm-actuated switch, system pressure during the normal operating cycle should never exceed the upper limit of the range. Excessive pressure will greatly reduce the life of the diaphragm.

Maximum Allowable Pressure

Maximum allowable pressure is the pressure to which a switch can be subjected without causing a change in operating characteristics, shift in settings, or damage to the device. Pressure surges may occur in a system during the start up of a machine or from valve operation. Surges are not normally detrimental to the life of a switch if the surge is within the maximum allowable pressure rating of the switch. Diaphragm-actuated switches should not be subjected to more than 10 surges per day. More frequent surges will greatly reduce the life of the diaphragm.

© 2023 All rights Reserved

Settings

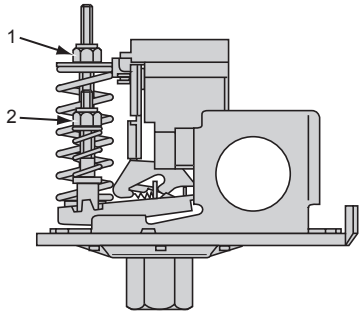

Pressure switches with adjustable differential (Types FSG, FYG, and FRG)

When setting the pressure switch, adjust the setting point on falling pressure first, then the setting point on rising pressure (PB).

- **Setting point on falling pressure**
  The setting point on falling pressure is set by adjusting range-nut **1**.
- **Setting point on rising pressure**
  The setting point on rising pressure is set by adjusting range-nut **2**.



Pressure switches with fixed differential (Types FTG and FHG)

Only the setting point on rising pressure is adjustable.

- **Setting point on rising pressure**
  The setting point on rising pressure is set by adjusting range-nut **1**.
- **Setting point on falling pressure**
  The setting point on falling pressure is not adjustable.

The difference between the tripping and resetting points of the contact is the inherent differential of the switch (due to factors such as contact differential and friction).

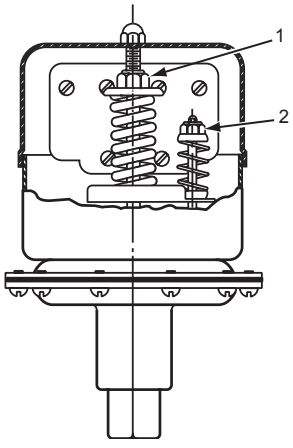

Pressure switches with adjustable differential (Type G)

When setting the pressure switch, adjust the setting point on falling pressure first, then the setting point on rising pressure.

- **Setting point on falling pressure**
  The setting point on falling pressure is set by adjusting range-nut **1**.
- **Setting point on rising pressure**
  The setting point on rising pressure is set by adjusting range-nut **2**.

© 2023 All rights Reserved

General Specifications
Types FSG/FSW, FTG/FTW, and FYG/FYW

Table 1: Environment

Type	FSG/FSW	FTG/FTW	FYG/FYW
Conforming to standards	UL 508, NEC Article 430-84, ANSI/NSF Standard 61, FDA 21CFR.2600		
Product approvals	UL, CSA		
Degree of protection	IP20, NEMA Type 1 (Types F•G). NEMA Type 3R (Types F•W) must be mounted in vertical position to maintain enclosure rating.		
Operating position	IP20 and NEMA Type 1 in any position, NEMA Type 3R in the vertical position only.		
Operating rate	10 cycles/m		
Repeat accuracy	±3% of the range		
Ambient air temperature			
Storage	–22 to 158 °F (–30 to 70 °C)		
Operation	–22 to 158 °F (–30 to 70 °C)		
Fluids Controlled	Fresh water (or sea water with Form Q)		
Materials	Cover: polypropylene, Noryl® thermoplastic resin or equivalent for Type 3R. Component material in contact with fluid: flange, zinc plated or equivalent (fluid entry), nitrile or equivalent rubber (diaphragm)		
Fluid connection	1/8" NPSF internal, 1/4" NPSF internal, 1/2" NPT external, 1/4" bayonet (barbed), 90° elbow 1/4" bayonet, four-way flange, 3/8" NPSF internal, 1/4" flare and other specials		
Electrical connection	2 open side entries, 0.88 in. diameter, with two flats		

Table 2: Contact Block Characteristics

Type of contacts	One 2 pole, 2 N.C. (4 terminal) contacts, snap action
Resistance across terminals	< 25 mΩ
Short-circuit protection	5,000 A
Connection	Screw clamp terminals. Clamping capacity up to 10 AWG (5.261 mm^2)
Electrical durability	100,000 cycles

Table 3: Electrical Ratings

Type (2 pole)		FSG/FSW			FTG/FTW			FYG/FYW		
	Voltage	~ 1Ø Vac	~ 3Ø Vac	Vdc	~ 1Ø Vac	~ 3Ø Vac	Vdc	~ 1Ø Vac	~ 3Ø Vac	Vdc
Power ratings of controlled motors	**115 V**	1.1 kW (1.5 hp)	1.5 kW (2 hphp)	0.18 kW (.25 hp)	0.75 kW (1 hp)	—	—	1.5 kW (2 hp)	2.2 kW (3 hp)	0.37 kW (.50 hp)
	230 V	1.5 kW (2 hp)	2.2 kW (3 hp)	0.18 kW (.25 hp)	0.75 kW (1 hp)	—	—	2.2 kW (3 hp)	3.7 kW (5 hp)	0.37 kW (.50 hp)
	460 / 575 V	—	0.75 kW (1 hp)	—	—	—	—	—	0.75 kW (1 hp)	—

© 2023 All rights Reserved

Types FRG, FHG, and G

Table 4: Environment

Type	FRG	FHG	G
Conforming to Standards	UL 508, NEC Article 430-84, ANSI/NSF Standard 61, FDA 21CFR.2600		
Product approvals	UL, CSA		
Degree of protection	IP20, NEMA Type 1. NEMA Type 3R (only Types G•B) must be mounted in vertical position to maintain enclosure rating		
Operating position	IP20 and NEMA Type 1 in any position, NEMA Type 3R in the vertical position only		
Operating rate	10 cycles/m		
Repeat accuracy	±3% of the range		
Ambient air temperature			
Storage	–22 to 158 °F (–30 to 70 °C)		
Operation	–22 to 158 °F (–30 to 70 °C)		
Fluids Controlled	Fresh water (or sea water with Form Q)		
Materials	Cover: polypropylene, Noryl thermoplastic resin or equivalent for Type 3R, Component material in contact with fluid: flange, zinc plated or equivalent (fluid entry), nitrile or equivalent rubber (diaphragm)		
Fluid connection	1/8" NPSF internal, 1/4" NPSF internal, 1/2" NPT external, 1/4" bayonet (barbed), 90° elbow 1/4" bayonet, four-way flange, 3/8" NPSF internal, 1/4" flare and other specials		
Electrical connection	2 open side entries, 0.88 in. diameter, with two flats		3 knockouts for 1/2" conduit

Table 5: Contact Block Characteristics

Type of contacts	One 2 pole, 2 N.C. (4 terminal) contacts, snap action Type FRG: 1 or 2 pole, 2 N.O. (2 or 4 terminal) contacts, snap action
Resistance across terminals	< 25 mΩ
Short-circuit protection	5,000 A
Connection	Screw clamp terminals. Clamping capacity up to 10 AWG (5.261 mm^2)
Electrical durability	100,000 cycles

Table 6: Electrical Ratings

Type (1 pole) [1]		**FRG**			**FHG**			**G**		
Power ratings of controlled motors [2]	**Voltage**	~ 1Ø Vac	~ 3Ø Vac	Vdc	~ 1Ø Vac	~ 3Ø Vac	Vdc	~ 1Ø Vac	~ 3Ø Vac	Vdc
	32 V	—	—	—	—	—	—	—	—	—
	115 V	0.75 kW (1 hp)	—	0.18 kW (.25 hp)	1.1 kW (1.5 hp)	1.5 kW (2 hp)	0.18 kW (.25 hp)	0.75 kW (1 hp)	—	0.37 kW (.50 hp)
	230 V	0.75 kW (1 hp)	—	0.18 kW (.25 hp)	1.5 kW (2 hp)	2.2 kW (3 hp)	0.18 kW (.25 hp)	1.5 kW (2 hp)	—	0.37 kW (.50 hp)
	460 / 575 V	—	—	—	—	0.75 kW (1 hp)	—	1.5 kW (2 hp)		—
Type (2 pole) [3]										
Power ratings of controlled motors	**Voltage**	~ 1Ø Vac	~ 3Ø Vac	Vdc	~ 1Ø Vac	~ 3Ø Vac	Vdc	~ 1Ø Vac	~ 3Ø Vac	Vdc
	32 V	—	—	0.18 kW (.25 hp)	—	—	—	—	—	—
	115 V	0.75 kW (1 hp)	0.75 kW (1 hp)	0.18 kW (.25 hp)	1.5 kW (2 hp)	2.2 kW (3 hp)	0.37 kW (.50 hp)	1.5 kW (2 hp)	2.2 kW (3 hp)	0.75 kW (1 hp)
	230 V	0.75 kW (1 hp)	0.75 kW (1 hp)	0.18 kW (.25 hp)	2.2 kW (3 hp)	3.7 kW 5 hp)	0.37 kW (.50 hp)	2.2 kW (3 hp)	3.7 kW 5 hp)	0.75 kW (1 hp)
	460 / 575 V	—	—	—	—	0.75 kW (1 hp)	—	3.7 kW 5 hp)	3.7 kW 5 hp)	—

[1] Includes: FHG 2, 3, 4, 9, 12, 13, 14, 19, 42, 44, 49

[2] Type FRG and G devices include 1 N.O. and 1 N.C. contact (Form H).

[3] Includes: FHG 22, 24, 29, 32, 33, 34, 39, 52, 54, 59

PUMPTROL™

© 2023 All rights Reserved

Interpretation of the Catalog Number
Class 9013 Type F Water Pump Switches

Example: 9013FSG2J24C20

FS	G	2				J24		C20	
Type	**Enclosure**	**Fluid Connection**		**Differential psi**	**Range psi**	**Code**	**psi**	**Form**	**Modification**
FS: Standard Adj Diff ≤ 1.5 hp	**G:** NEMA 1	1:	1/8" NPSF Internal	15–30	20–65	**Standard Action**		**C20:**	Standard pack of 20 devices per box [1]
FT: Fixed Diff ≤ 1 hp	**W:** NEMA 3R	**2:**	¼" NPSF internal	15–30	20–65	**J15:**	5–21	**H**	1 N.O. / 1 N.C. contact FRG 2-pole only
FY: Adj Diff ≤ 2 hp		**9:**	¼" NPT external	15–30	20–65	**J16:**	8–20	**M1**	Maintained manual cut-out lever (Auto-Off) FSG, FYG
FR: Reverse Acting, Adj Diff ≤ 1 hp		**10:**	¼" Bayonet (barbed)	15–30	20–65	**J20:**	20–40	**M3**	Momentary manual cut-in lever (Auto-Start) (FRG2–59)
		20:	90° Elbow	15–30	20–65	**J18:**	20–50	**M4**	Low pressure cut-off (Auto-Start-Off) FSG, FYG
			¼" Bayonet	10–30	20–50	**J21:**	30–50	**M5**	Maintained manual cut-in lever (Auto-On) FRG2–59
		22:	¼" NPSF internal	10–30	20–60	**J24:**	40–60	**P:**	Pulsation plug (Type 2 and 9)
		29:	¼" NPT external	6–20	9–30	**J33:**	50–70	**T:**	½" conduit bushing—½" long thread—on left
		42:	¼" NPSF internal	6–20	9–30	**J34:**	55–85	**U:**	Slip-on connections (load side terminals only) FSG, FYG
		49:	¼" NPT external	20–30	25–80	**J25:**	60–80	**U2:**	Slip-on connections (line and load side terminals) FSG, FYG
		52:	¼" NPT external	20–30	25–80	**Reverse Action**		**Z22:**	Black cover FSG, FYG
		59:	¼" NPT external	20–30	25–80	**J17:**	8.5–5.5	**B7:**	One grommet, CE mark[2]
						J36:	10–5	**B8:**	Two grommets, CE mark[2]
						J22:	22–12	**Q8:**	Salt water plastic flange [3]
						J19:	22–16		
						J70:	35–20		
						J23:	40–20		
						J35:	50–30		
						J32:	80–60		
						J51:	100–80		
						J64:	150–120		
						J99:	Specify pressure setting		

[1] Additional bulk packages are available. See Table 7 on page 37

[2] Inclusion of B7 or B8 grommets will negate UL/CSA approvals for the device, but they may be used for applications which do not require UL/CSA approvals.

[3] Salt water plastic flange
(max. temp. 120°F (49°)) (max. pressure 80 psi)
Available only Types FSG2, FYG2, FRG2, FSG*2, FRG*2 1/4" NPSF internal only

NOTE: Use this table only to interpret the catalog number. Some combinations are not available.

© 2023 All rights Reserved

Class 9013 Type F Air Compressor Switches

Example: 9013FHG2J27C20

FH	G	2					J27		C20	
Type	**Enclosure**	**Low hp ≤ 1.5 hp**	**High hp ≥ 2 hp**	**Fluid Connection**	**Differential psi**	**Range psi**	**Code**	**psi**	**Form**	**Modification**
FH:	**G:** NEMA 1	**2:**	**22:**	¼" NPSF internal	20	40–100	J**43:**	Off at 80	**C20:**	Standard pack of 20 devices per box [1]
		3:	**—**	3/8" NPSF internal	20	40–100	**J27:**	Off at 100		
		4:	**24:**	¼" 4-way flange	20	40–100	**J37:**	Off at 110	**G4:**	Addition of a second ground screw
		9:	**29:**	¼" NPT external	20	40–100	**J38:**	Off at 115		
		12:	**32:**	¼" NPSF internal	30	70–150	**J69:**	Off at 120	**M1:**	Maintained manual cut-out lever (Auto-Off)
		13:	**33:**	3/8" NPSF internal	30	70–150	**J52:**	Off at 125		
		14:	**34:**	¼" 4-way flange	30	70–150	**J39:**	Off at 135	**P:**	Pulsation plug (copper) (not field installable)
		19:	**39:**	¼" NPT external	30	70–150	**J68:**	Off at 140		
		42:	**52:**	¼" NPSF internal	40	100–200	**J55:**	Off at 150	**T:**	½" conduit bushing—½" long thread—on left
		44:	**54:**	¼" 4-way flange	40	100–200	**J40:**	Off at 155		
		49:	**59:**	¼" NPT external	40	100–200	**J59:**	Off at 175	**U:**	Slip-on connections (load side terminals only)
							J99:	Specify pressure setting	**U2:**	Slip-on connections
									W:	(line and load side terminals) Factory sealed range stud
									X:	2-way pressure release value
									X1: :	Quick connect two-way pressure release valve
									Z22:	Black cover
									B7:	One grommet, CE mark[2]
									B8:	Two grommets, CE mark[2]

[1] Additional bulk packages are available. See Table 7 on page 37.

[2] Inclusion of B7 or B8 grommets will negate UL/CSA approvals for the device, but they may be used for applications which do not require UL/CSA approvals.

NOTE: Use this table only to interpret the catalog number. Some combinations are not available.

© 2023 All rights Reserved

Class 9013 Type G Pressure Switches

Example: 9013GHG2J57PXZC10

GH	G	2			J57		P. X. Z. C10	
Type	**Enclosure**	**Fluid Connection**		**GH**	**Code**	**psi**	**Form**	**Modification** [1]
GH: 200/250 psi	**G:** NEMA 1	**1:**	1/8" NPSF internal	200	**J20:**	20–40	**C10:**	Standard pack of 10 devices per box GHB, GHG, GSB, GSG
GS: 80 psi	**B:** NEMA 3R	**2:**	¼" NPSF internal	200	**J21:**	30–50	**E:**	3-way lever (On-Auto-Off) not compatible with Form X GHG, GMG, GSG
GM: 35 psi	**W:** NEMA 4	**3:**	3/8" NPSF internal	200	**J23:**	40–20	**H:**	1 N.O. / 1 N.C. contact
	R: NEMA 7, 9	**4:**	1/8" NPSF internal	250	**J24:**	40–60	**P:**	Pulsation plug (copper) (not field installable)
		5:	¼" NPT external	250	**J25:**	60–80	**R:**	Reverse action / 2 N.O. contacts
		6:	3/8" NPSF internal	250	**J26:**	70–90	**U:**	Slip-on connections (load side terminals only)
				GS	**J28:**	70–100	**U2:**	Slip-on connections (line and load side terminals)
		1:	1/8" NPSF internal	80	**J29:**	75–100	**X:**	2-way pressure release value (not compatible with Form E) available on GHB, GMG, GSB, GHG, GSG, GHR, GHW, GSR, GSW
		2:	¼" NPSF internal	80	**J30:**	80–100	**Z:**	¼" male pipe thread on pressure connection
		3:	3/8" NPSF internal	80	**J31:**	90–120	**Z16:**	½" - 14 NPT external, ¼" - 18 NPT internal
				GM	**J51:**	100–80		
		2:	¼" NPSF internal	35	**J53:**	100–125		
					J54:	110–125		
					J56:	110–150		
					J57:	120–150		
					J58:	125–150		
					J60:	125–175		
					J61:	130–175		
					J50:	135–175		
					J66:	140–170		
					J62:	140–175		
					J63:	145–175		
					J64:	150–120		
					J67:	150–175		
					J65:	215–250		
					J99:	Specify pressure setting		

[1] Cannot order Form R in combination with Form H.

NOTE: Use this table only to interpret the catalog number. Some combinations are not available.

© 2023 All rights Reserved

Selection and Specifications

Type FSG, 2-Pole, 2 N.C. Contacts
Degree of Protection IP20, NEMA Type 1

Flange Style				
Adjustable range of setting point 20.3–66.7 psi (1.4–4.6 bar) **Contacts open on rising pressure**				
Differential	Adjustable			
Fluid Connections	1/4" NPSF internal	1/4" NPT external		
Catalog Numbers				
NEMA Type 1, IP20	**9013FSG2**	**9013FSG9**	**9013FSG10**	**9013FSG20**
NEMA Type 3R [1]	**9013FSW2**			
Fluids Controlled	Water	Water	Water	Water
Pressure Range				
Cut-out psig (bar)	20–65 (1.4–4.5)	20–65 (1.4–4.5)	20–65 (1.4–4.5)	20–65 (1.4–4.5)
Cut-in psig (bar)	5–45 (0.3–3.1)	5–45 (0.3–3.1)	5–45 (0.3–3.1)	5–45 (0.3–3.1)
Weight, lb (kg)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)
Supplemental Specifications (not shown under General Specifications)				
Differential psig (bar)	15–30 (1.0–2.1)			
Maximum Allowable Pressure psig (bar)	65 (4.5)			
Cable Entry	2 cable entries 0.88 in. (22.4 mm) with 0.84 in. (21.3 mm) across flats			
Pressure Switch Style	Diaphragm			

[1] Must be mounted in a vertical position to maintain enclosure rating.

Ordering information

1. Select the catalog number from the table above.
2. Select the pressure code and add the code designation to the end of the catalog number. Ensure that the pressure code falls within the limits of the device as shown in the device listings.
3. If special features are desired, add the appropriate Form letter to the catalog number after the pressure code. Arrange the Form letters in alphabetical sequence when ordering more than one special feature.
4. Add the packaging code at the end of the sequence, after the Forms. (For example, to order a standard pack of 20 devices, specify 9013FSG2J21MIC20.) If no packaging code is indicated, the devices will be shipped individually packaged.

Pressure codes

NOTE: Existence of a code does not imply that the code is available for any or all devices.

Settings (psi)	Code
5–21	J15
8–20	J16
20–40	J20
20–50	J18
30–50	J21
40–60	J24
50–70	J33
60–80	J25
Specify pressure settings	J99
Low pressure cut-off (Auto-Start-Off)	M4 [1]
Pulsation plug (standard on FYG4)	P [2]

[1] Low pressure cut-off (Auto-Start-Off) operates at approximately 10 psig below cut-in and will turn off the pump FSG, FYG - (Type 1–20 only) M4
[2] Pulsation plug (standard on FYG4) FYG2, 9
Nylon pulsation plug can be field installed on types having 1/4" NPSF internal connector. Catalog number 1530S6G1 is one bag of 50 plugs.

PUMPTROL™

© 2023 All rights Reserved

Commercial Pressure and Float Switches for Power Circuits

Electromechanical Pressure Switches, Class 9013 Types F and G

Flange Style					
Differential	Adjustable				
Fluid Connections	1/4" NPSF internal	1/4" NPT external	1/4" NPSF internal	1/4" NPT external	
Adjustable range of setting point 20.3–66.7 psi (1.4–4.6 bar) **Contacts open on rising pressure**					
Catalog Numbers					
NEMA Type 1, IP20	**9013FSG22**	**9013FSG29**	**9013FSG42**	**9013FSG49**	**9013FSG52**
NEMA Type 3R [1]	—	**9013FSW29**	—	—	
Fluids Controlled	Water	Water	Water	Water	Water
Pressure Range					
Cut-out psig (bar)	20–50 (1.4–3.5)	20–60 (1.4–4.2)	9–30 (0.6–2.1)	9–30 (0.6–2.1)	25–80 (1.7–5.5)
Cut-in psig (bar)	10–30 (0.7–2.1)	10–45 (0.7–3.1)	3–10 (0.2–0.7)	3–10 (0.2–0.7)	5–60 (0.3–4.2)
Weight, lb (kg)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)
Supplemental Specifications (not shown under General Specifications)					
Differential psig (bar)	10–30 (0.7–2.1)	10–30 (0.7–2.1)	6–20 (0.4–1.4)	6–20 (0.4–1.4)	20–30 (1.4–2.1)
Maximum Allowable Pressure psig (bar)	50 (3.5)	60 (4.1)	30 (2.1)	30 (2.1)	80 (5.5)
Cable Entry	2 cable entries 0.88 in. (22.4 mm) with 0.84 in. (21.3 mm) across flats				
Pressure Switch Style	Diaphragm				

[1] Must be mounted in a vertical position to maintain enclosure rating.

Modifications (Forms)

Description	**Applies to:**	**Form letter**
Standard pack of 20 devices per box	All Type F	C20 [1]
Maintained manual cut-out lever (Auto-Off)	FSG, FYG	M1
Low pressure cut-off (Auto-Start-Off) operates at approximately 10 psig below cut-in and will turn off the pump	FSG, FYG	M4
Maintained manual cut-in lever (Auto-On)	FSG, FYG	M5
Pulsation plug (standard on FSG4)	FSG2, 9	P [2]
½" conduit bushing — ½" long thread — on left	All Type F	T
Slip-on connectors (load side terminals only)	FSG, FYG	U
Slip-on connectors (line and load side terminals)	FSG, FYG	U2
Black cover	FSG, FYG	Z22
One grommet, CE mark	All types F	B7 [3]
Two grommets, CE mark	All types F	B8 [3]
Salt water plastic flange [4]	FSG, FYG	Q8

[1] Additional bulk packages are available. See Table 7 on page 37.

[2] Nylon pulsation plug can be field installed on types having 1/4" NPSF internal connector.

[3] Inclusion of B7 or B8 grommets will negate UL/CSA approvals for the device, but they may be used for applications which do not require UL/CSA approvals.

[4] Salt water plastic flange. (max. temp. 120°F (49°)) (max. pressure 80 psi) Available only Types FSG2, FYG2, FRG2, FSG*2, FRG*2 1/4" NPSF internal only

Catalog number 1530S6G1 is one bag of 50 plugs.

PUMPTROL™

© 2023 All rights Reserved

Types FTG, 2-Pole, 2 N.C. Contacts
Degree of Protection IP20, NEMA Type 1

Flange Style	
Fixed range of setting point **Contacts open on rising pressure**	
Differential	Fixed
Fluid Connections	1/4" NPSF internal
Catalog Numbers	
NEMA Type 1, IP20	**9013FTG2**
NEMA Type 3R [1]	**9013FTW2**
Fluids Controlled	Water
Pressure Range	
Cut-out psig (bar)	20–65 (1.4–4.5)
Cut-in psig (bar)	—
Weight, lb (kg)	0.75 (0.340)
Supplemental Specifications (not shown under General Specifications)	
Differential psig (bar)	20 (1.4)
Maximum Allowable Pressure psig (bar)	65 (4.5)
Cable Entry	2 cable entries 0.88 in. (22.4 mm) with 0.84 in. (21.3 mm) across flats
Pressure Switch Style	Diaphragm

[1] Must be mounted in a vertical position to maintain enclosure rating.

Ordering information

1. Select the catalog number from the table above.
2. Select the pressure code and add the code designation to the end of the catalog number. Ensure that the pressure code falls within the limits of the device as shown in the device listings.
3. If special features are desired, add the appropriate Form letter to the catalog number after the pressure code. Arrange the Form letters in alphabetical sequence when ordering more than one special feature.
4. Add the packaging code at the end of the sequence, after the Forms. (Sold in lots or multiple of 500; for example: 9013FTG2J21C500.) If no packaging code is indicated, the devices will be shipped individually packaged.

Pressure codes

NOTE: Existence of a code does not imply that the code is available for any or all devices.

Settings (psi)	Code
5–21	J15
8–20	J16
20–40	J20
20–50	J18
30–50	J21
40–60	J24
Specify pressure settings	J99

© 2023 All rights Reserved

Types FYG, 2-Pole, 2 N.C. Contacts
Degree of Protection IP20, NEMA Type 1

Flange Style		
Fixed range of setting point Contacts open on rising pressure		
Differential	Adjustable	
Fluid Connections	1/4" NPSF internal	
Catalog Numbers		
NEMA Type 1, IP20	**9013FYG2**	**9013FYG42**
NEMA Type 3R [1]	**9013FYW2**	**--**
Fluids Controlled		Water
Pressure Range		
Cut-out psig (bar)	25–80 (1.7–5.5)	9–40 (0.6–2.8)
Cut-in psig (bar)	5–60 (0.3–4.2)	3–10 (0.2–0.7)
Weight, lb (kg)	0.75 (0.340)	0.75 (0.340)
Supplemental Specifications (not shown under General Specifications)		
Differential psig (bar)	20–30 (1.4–2.1)	6–20 (0.4–1.4)
Maximum Allowable Pressure psig (bar)	80 (5.5)	40 52;8°
Cable Entry	2 cable entries 0.88 in. (22.4 mm) with 0.84 in. (21.3 mm) across flats	
Pressure Switch Style	Diaphragm	

[1] Must be mounted in a vertical position to maintain enclosure rating.

Ordering information

1. Select the catalog number from the table above.
2. Select the pressure code and add the code designation to the end of the catalog number. Ensure that the pressure code falls within the limits of the device as shown in the device listings.
3. If special features are desired, add the appropriate Form letter to the catalog number after the pressure code. Arrange the Form letters in alphabetical sequence when ordering more than one special feature.
4. Add the packaging code at the end of the sequence, after the Forms. (Sold in lots or multiple of 500; for example: 9013FTG2J21C500.) If no packaging code is indicated, the devices will be shipped individually packaged.

Pressure codes

NOTE: Existence of a code does not imply that the code is available for any or all devices.

Settings (psi)	Code
5–21	J15
8–20	J16
20–40	J20
20–50	J18
30–50	J21
40–60	J24
50–70	J33
60–80	J25
Specify pressure settings	J99

PUMPTROL™

© 2023 All rights Reserved

Type FRG, 1- or 2-Pole, 2 N.O. Contacts
Degree of Protection IP20, NEMA Type 1

Flange Style				
Adjustable range of setting point **Contacts open on rising pressure**				
Differential	Adjustable			
Fluid Connections	1/4" NPSF internal	1/4" NPT external	1/4" NPSF internal	1/4" NPT external
Adjustable range of setting point 20.3–66.7 psi (1.4–4.6 bar) **Contacts open on rising pressure**				
Catalog Numbers				
1-pole **NEMA Type 1, IP20**	**9013FRG12**	**--**	**9013FRG32**	**9013FRG33**
2-pole **NEMA Type 1, IP20**	**9013FRG2**	**9013FRG9**	**9013FRG22**	**9013FRG23**
Fluids Controlled	Water	Water	Water	Water
Pressure Range				
Cut-out psig (bar)	8–45 (0.6–3.1)	8–45 (0.6–3.1)	4–25 (0.3–1.7)	4–25 (0.3–1.7)
Cut-in psig (bar)	23–65 (1.6–4.5)	23–65 (1.6–4.5)	10–45 (0.7–3.1)	10–45 (0.7–3.1)
Weight, lb (kg)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)
Supplemental Specifications (not shown under General Specifications)				
Differential psig (bar)	15–30 (1.0–2.1)	15–30 (1.0–2.1)	6–20 (0.4–1.4)	6–20 (0.4–1.4)
Maximum Allowable Pressure psig (bar)	65 (4.5)	65 (4.5)	45 (3.1)	45 (3.1)
Cable Entry	2 cable entries 0.88 in. (22.4 mm) with 0.84 in. (21.3 mm) across flats			
Pressure Switch Style	Diaphragm			

Ordering information

1. Select the catalog number from the table above.
2. Select the pressure code and add the code designation to the end of the catalog number. Ensure that the pressure code falls within the limits of the device as shown in the device listings.
3. If special features are desired, add the appropriate Form letter to the catalog number after the pressure code. Arrange the Form letters in alphabetical sequence when ordering more than one special feature.
4. Add the packaging code at the end of the sequence, after the Forms. (For example, to order a standard pack of 20 devices, specify 9013FRG2J21MIC20.) If no packaging code is indicated, the devices will be shipped individually packaged.

Pressure codes

NOTE: Existence of a code does not imply that the code is available for any or all devices.

Settings (psi)	**Code**
8.5–5.5	J17
10–5	J36
22–12	J22
22–16	J19
35–20	J70
40–20	J23
50–30	J35
80–60	J32
100–80	J51
150–120	J64
Specify pressure settings	J99

PUMPTROL™

© 2023 All rights Reserved

Commercial Pressure and Float Switches for Power Circuits

Electromechanical Pressure Switches, Class 9013 Types F and G

Flange Style			
Adjustable range of setting point **Contacts open on falling pressure**			
Differential	Adjustable	Fixed	Fixed
Fluid Connections	1/4" NPT external	1/4" NPSF internal	3/8" NPSF internal
Catalog Numbers			
1-pole **NEMA Type 1, IP20**	**--**	**9013FRG52**	**9013FRG53**
2-pole **NEMA Type 1, IP20**	**9013FRG29**	**9013FRG42**	**--**
Fluids Controlled	Water	Water	Water
Pressure Range			
Cut-out psig (bar)	4–25 (0.3–1.7)	1–11 (0.1–0.8)	1–11 (0.1–0.8)
Cut-in psig (bar)	10–45 (0.7–3.1)	6–14 (0.4–1.0)	6–14 (0.4–1.0)
Weight, lb (kg)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)
Supplemental Specifications (not shown under General Specifications)			
Differential psig (bar)	6–20 (0.4–1.4)	5 (0.3)	5 (0.3)
Maximum Allowable Pressure psig (bar)	45 (3.1)	14 (1.0)	14 (1.0)
Cable Entry			
Pressure Switch Style			

Modifications (Forms)

Description	**Applies to:**	**Form letter**
Standard pack of 20 devices per box	All Type F	C20 [1]
1 N.O. / 1 N.C. contact	FRG (2-pole only)	H
Momentary manual cut-in lever (Auto-Start)	FRG2–59 only	M3
Maintained manual cut-in lever (Auto-On)	FRG2–59 only	M5
Pulsation plug	FSG2, 9	P [2]
Salt water flange (¼ NPSF internal only)	All Type F	Q8
½" conduit bushing — ½" long thread — on left	All Type F	T
Black cover	FSG, FYG, FRG	Z22

[1] Additional bulk packages are available. See Table 7 on page 37.

[2] Nylon pulsation plug can be field installed on types having 1/4" NPSF internal connector. Catalog number 1530S6G1 is one bag of 50 plugs.

PUMPTROL™

© 2023 All rights Reserved

Type FRG, 1- or 2-Pole, 2 N.O. Contacts
Degree of Protection IP20, NEMA Type 1

Flange Style					
Adjustable range of setting point Contacts open on falling pressure					
Differential	Adjustable				
Fluid Connections	1/4" NPSF internal	3/8" NPSF internal	1/4" NPSF internal	3/8" NPSF internal	1/4" NPT external
Catalog Numbers					
1-pole NEMA Type 1, IP20	**9013FRG72**	**9013FRG73**	**9013FRG92**	**9013FRG93**	--
2-pole NEMA Type 1, IP20	**9013FRG62**	**9013FRG63**	--	--	**9013FRG89**
Fluids Controlled	Water	Water	Water	Water	Water
Pressure Range					
Cut-out psig (bar)	20–75 (1.4–5.2)	20–75 (1.4–5.2)	35–120 (2.4–8.3)	35–120 (2.4–8.3)	35–120 (2.4–8.3)
Cut-in psig (bar)	40–100 (2.8–6.9)	40–100 (2.8–6.9)	65–150 (4.5–10.3)	65–150 (4.5–10.3)	65–150 (4.5–10.3)
Weight, lb (kg)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)
Supplemental Specifications (not shown under General Specifications)					
Differential psig (bar)	20–30 (1.4–2.1)	20–30 (1.4–2.1)	30–45 (2.1–3.1)	30–45 (2.1–3.1)	30–45 (2.1–3.1)
Maximum Allowable Pressure psig (bar)	100 (6.9)	100 (6.9)	150 (10.3)	150 (10.3)	150 (10.3)
Cable Entry	2 cable entries 0. 88 in. (22.4 mm) with 0.84 in. (21.3 mm) across flats				
Pressure Switch Style	Diaphragm				

Ordering information

1. Select the catalog number from the table above.
2. Select the pressure code and add the code designation to the end of the catalog number. Ensure that the pressure code falls within the limits of the device as shown in the device listings.
3. If special features are desired, add the appropriate Form letter to the catalog number after the pressure code. Arrange the Form letters in alphabetical sequence when ordering more than one special feature.
4. Add the packaging code at the end of the sequence, after the Forms. (For example, to order a standard pack of 20 devices, specify 9013FRG72J23C20.) If no packaging code is indicated, the devices will be shipped individually packaged.

Pressure codes

NOTE: Existence of a code does not imply that the code is available for any or all devices.

Settings (psi)	**Code**
8.5–5.5	J17
10–5	J36
22–12	J22
22–16	J19
35–20	J70
40–20	J23
50–30	J35
80–60	J32
100–80	J51
150–120	J64
Specify pressure settings	J99

PUMPTROL™

© 2023 All rights Reserved

Type FHG, 2-Pole, 2 N.C. Contacts
Degree of Protection IP20, NEMA Type 1

Flange Style						
Adjustable range of setting point Contacts open on rising pressure						
Differential	Fixed					
Pressure Connections	1/4" NPSF internal	3/8" NPSF internal	1/4" 4-way Flange	1/4" NPT external	1/4" NPSF internal	3/8" NPSF internal
Catalog Numbers						
Lower hp, 2-pole NEMA Type 1, IP20	**9013FHG2**	**9013FHG3**	**9013FHG4**	**9013FHG9**	**9013FHG12**	**9013FHG13**
Higher hp, 2-pole NEMA Type 1, IP20	**9013FHG22**	—	**9013FHG24**	**9013FHG29**	**9013FHG32**	**9013FHG33**
Controls	Air	Air	Air	Air	Air	Air
Pressure Range						
Adjustable cut-out psig (bar)	40–100 (2.8–6.9)	40–100 (2.8–6.9)	40–100 (2.8–6.9)	40–100 (2.8–6.9)	70–150 (4.8–10.3)	70–150 (4.8–10.3)
Weight, lb (kg)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)
Supplemental Specifications (not shown under General Specifications)						
Differential, Fixed psig (bar)	20 (1.4)	20 (1.4)	20 (1.4)	20 (1.4)	30 (2.1)	30 (2.1)
Maximum Allowable Pressure psig (bar)	100 (6.9)	100 (6.9)	100 (6.9)	100 (6.9)	150 (10.3)	150 (10.3)
Cable Entry	2 cable entries 0.88 in. (22.4 mm) with 0.84 in. (21.3 mm) across flats					
Pressure Switch Style	Diaphragm					

Ordering information

1. Select the catalog number from the table above.
2. Select the pressure code and add the code designation to the end of the catalog number. Ensure that the pressure code falls within the limits of the device as shown in the device listings.
3. If special features are desired, add the appropriate Form letter to the catalog number after the pressure code. Arrange the Form letters in alphabetical sequence when ordering more than one special feature.
4. Add the packaging code at the end of the sequence, after the Forms. (For example, to order a standard pack of 20 devices, specify 9013FHG19J52MIXC20.) If no packaging code is indicated, the devices will be shipped individually packaged.

Pressure codes

NOTE: Existence of a code does not imply that the code is available for any or all devices.

Settings (psi)	Code
Off at 80	J43
Off at 100	J27
Off at 110	J37
Off at 115	J38
Off at 120	J69
Off at 125	J52
Off at 135	J39
Off at 140	J68
Off at 150	J55
Off at 155	J40
Off at 175	J59
Specify pressure settings	J99

PUMPTROL™

© 2023 All rights Reserved

Flange Style					
Adjustable range of setting point Contacts open on rising pressure					
Differential	Fixed				
Pressure Connections	4-way Flange	1/4" NPT external	1/4" 4-way Flange	1/4" 4-way Flange	1/4" 4-way Flange
Catalog Numbers					
Lower hp, 2 pole NEMA Type 1, IP20	**9013FHG14**	**9013FHG19**	**9013FHG42**	**9013FHG44**	**9013FHG49**
Higher hp, 2-pole NEMA Type 1, IP20	**9013FHG34**	**9013FHG39**	**9013FHG52**	**9013FHG54**	**9013FHG59**
Controls	Air	Air	Air	Air	Air
Pressure Range					
Adjustable cut-out psig (bar)	70–150 (4.8–10.3)	70–150 (4.8–10.3)	100–200 (6.9–13.8)	100–200 (6.9–13.8)	100–200 (6.9–13.8)
Weight, lb (kg)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)	0.75 (0.340)
Supplemental Specifications (not shown under General Specifications)					
Differential, Fixed psig (bar)	30 (2.1)	30 (2.1)	40 (2.8)	40 (2.8)	40 (2.8)
Maximum Allowable Pressure psig (bar)	150 (10.3)	150 (10.3)	200 (13.8)	200 (13.8)	200 (13.8)
Cable Entry	2 cable entries 0.88 in. (22.4 mm) with 0.84 in. (21.3 mm) across flats				
Pressure Switch Style	Diaphragm				

Modifications (Forms)

NOTE: Modifications G4 and Z22 can be field installed, all others are factory installed only.

Description	Form letter
Standard pack of 20 devices per box	C20 [1]
Addition of a second ground screw	G4
Maintained manual cut-out lever (Auto-Off)	M1
Pulsation plug (copper)	P
½" conduit bushing—½" long thread — on left	T
Slip-on connectors (load side terminals only)	U
Slip-on connectors (line and load side terminals)	U2
Factory sealed range stud	W
Two-way pressure release valve	X
Quick connect two-way pressure release valve (for use with Polyflow Tubing)	X1
Black cover	Z22

[1] Additional bulk packages are available. See Table 7 on page 37 on following page.

© 2023 All rights Reserved

Table 7: Bulk Package Form Numbers for 9013F Pressure Switches

Description	Bulk Package Quantity	20	50
Product without Forms M1, M3, M4, M5, T, X1	**9013FHG** (without 1/4" four-way)	C20	C50
	9013FHG4, 14, 24, 34, 44, 54 (with 1/4" 4-way flange)	C20	C50
	9013FRG	C20	C50
	9013FSG	C20	C50
	9013FYG	C20	C50

NOTE: other bulk package, please contact the customer care center

© 2023 All rights Reserved

Type G, 2-Pole, 2 N.C. Contacts
Degree of Protection IP20, NEMA Type 1, 3R, 7, and 9

Flange Style				
Adjustable range of setting point Contacts open on rising pressure				
Fluid Connections	1/4" NPSF internal	1/4" NPSF internal	1/4" NPSF internal	3/8" NPSF internal
Catalog Numbers				
NEMA Type 1, IP20	**9013GMG2**	—	**9013GSG2**	**9013GSG3**
NEMA Type 3R [1]	—	**9013GSB2**	—	—
Fluids / Pressure Controls	Water or air	Water or air	Water or air	Water or air
Pressure Range				
Cut-out psig (bar)	10–35 (0.7–2.4)	20–80 (1.4–5.5)	20–80 (1.4–5.5)	20–80 (1.4–5.5)
Cut-in psig (bar)	5.5–30.5 (0.4–2.1)	5–60 (0.4–4.2)	5–60 (0.4–4.2)	5–60 (0.4–4.2)
Weight, lb (kg)	2 (0.91)	2 (0.91)	2 (0.91)	2 (0.91)
Supplemental Specifications (not shown under General Specifications)				
Differential psig (bar)	4–8 (0.3–0.6)	15–30 (1.0–2.1)	15–30 (1.0–2.1)	15–30 (1.0–2.1)
Maximum Allowable Pressure psig (bar)	35 (2.4)	80 (5.5)	80 (5.5)	80 (5.5)
Cable Entry	3 knockouts for 1/2 in. conduit	3 knockouts for 1/2 in. conduit	3 knockouts for 1/2 in. conduit	3 knockouts for 1/2 in. conduit
Pressure Switch Style	Diaphragm			

[1] Must be mounted in vertical position to maintain enclosure rating.

Ordering information

1. Select the catalog number from the table above.
2. Select the pressure code and add the code designation to the end of the catalog number. Ensure that the pressure code falls within the limits of the device as shown in the device listings.
3. If special features are desired, add the appropriate Form letter to the catalog number after the pressure code. Arrange the Form letters in alphabetical sequence when ordering more than one special feature.
4. Add the packaging code at the end of the sequence, after the Forms. (For example, to order a standard pack of 10 devices, specify 9013GHG2J99RZC10.) If no packaging code is indicated, the devices will be shipped individually packaged.
   To order a standard pack of 10 devices per box C10 (available on GHB, GHG, GSB, and GSG) see page 36 for Form C10.

Pressure codes

NOTE: Existence of a code does not imply that the code is available for any or all devices.

Settings (psi)	Code	Settings (psi)	Code
20–40	J20	110–150	J56
30–50	J21	120–150	J57
40–20	J23	125–150	J58
40–60	J24	125–175	J60
60–80	J25	130–175	J61
70–90	J26	140–170	J66
70–100	J28	140–175	J62
75–100	J29	145–175	J63
80–100	J30	150–120	J64
90–120	J31	150–175	J67
100–80	J51	215–250	J65
100–125	J53	Specify pressure settings	J99
110–125	J54	—	—

PUMPTROL™

© 2023 All rights Reserved

Commercial Pressure and Float Switches for Power Circuits

Electromechanical Pressure Switches, Class 9013 Types F and G

Flange Style			
Adjustable range of setting point **Contacts open on rising pressure**			
Fluid Connections	1/4" NPSF internal	1/4" NPSF internal	1/4" NPSF internal
Catalog Numbers			
NEMA Type 3R	—	—	**9013GHB2**
NEMA Type 4	—	**9013GSW2**	—
NEMA Type 7, 9	**9013GSR2**	—	—
Fluids / Pressure Controls	Water or air	Water or air	Water or air
Pressure Range			
Cut-out psig (bar)	20–80 (1.4–5.5)	20–80 (1.4–5.5)	60–200 (4.1–13.8)
Cut-in psig (bar)	5–50 (0.4–3.5)	5–50 (0.4–3.5)	40–170 (2.8–12)
Weight, lb (kg)	8 (3.62)	8 (3.62)	2 (0.91)
Supplemental Specifications (not shown under General Specifications)			
Differential psig (bar)	20–40 (1.4–2.8)	20–40 (1.4–2.8)	20–40 (1.4–2.8)
Maximum Allowable Pressure psig (bar)	80 (5.5)	80 (5.5)	200 (13.8)
Cable Entry	2 conduit entries 3/4"-14 NTP	2 conduit entries 3/4"-14 NTP	3 knockouts for 1/2 in. conduit
Pressure Switch Style	Diaphragm		

Modifications (Forms)

NOTE: Factory installed only.

Description	Applies to:	Form letter
Standard pack of 10 devices per box	GHB, GHG, GSB, GSG	C10
3-way lever (On-Auto-Off) not compatible with Form X	GHG, GMG, GSG	E
1 N.O. / 1 N.C. contact	All Type G	H [1]
Pulsation plug (copper)	All Type G	P
Reverse action / 2 N.O. contacts	All Type G	R [1]
Slip-on connectors (load side terminals only)	All Type G	U
2-way pressure release valve (not compatible with Form E)	GHB, GMG, GSB, GHG, GSG, GHR, GHW, GSR, GSW	X
¼" male pipe thread on pressure connection	All Type G	Z
½" - 14 NPT external ¼" - 18 NPT internal	All Type G	Z16

[1] Cannot order Form R in combination with Form H.

PUMPTROL™

© 2023 All rights Reserved

Flange Style					
Adjustable range of setting point Contacts open on rising pressure					
Fluid Connections	1/8" NPSF internal	1/4" NPSF internal	3/8" NPSF internal	1/8" NPSF internal	1/4" NPSF internal
Catalog Numbers					
NEMA Type 1, IP20	**9013GHG1**	**9013GHG2**	**9013GHG3**	—	—
NEMA Type 7, 9	—	—	—	**9013GHR1**	**9013GHR2**
Fluids / Pressure Controls	Water or air	Water or air	Water or air	Water or air	Water or air
Pressure Range					
Cut-out psig (bar)	60–200 (4.1–13.8)	60–200 (4.1–13.8)	60–200 (4.1–13.8)	65–200 (4.5–13.8)	65–200 (4.5–13.8)
Cut-in psig (bar)	40–170 (2.8–12)	40–170 (2.8–12)	40–170 (2.8–12)	35–150 (2.4–10.3)	35–150 (2.4–10.3)
Weight, lb (kg)	2 (0.91)	2 (0.91)	2 (0.91)	8 (3.62)	8 (3.62)
Supplemental Specifications (not shown under General Specifications)					
Differential psig (bar)	20–40 (1.4–2.8)	20–40 (1.4–2.8)	20–40 (1.4–2.8)	30–50 (2.1–3.5)	30–50 (2.1–3.5)
Maximum Allowable Pressure psig (bar)	80 (5.5)	80 (5.5)	80 (5.5)	80 (5.5)	80 (5.5)
Cable Entry	3 knockouts for 1/2 in. conduit	3 knockouts for 1/2 in. conduit	3 knockouts for 1/2 in. conduit	2 conduit entries 3/4"-14 NTP	2 conduit entries 3/4"-14 NTP
Pressure Switch Style	Diaphragm				

Ordering information

[1] Select the catalog number from the table above.

[2] Select the pressure code and add the code designation to the end of the catalog number. Ensure that the pressure code falls within the limits of the device as shown in the device listings.

[3] If special features are desired, add the appropriate Form letter to the catalog number after the pressure code. Arrange the Form letters in alphabetical sequence when ordering more than one special feature.

[4] Add the packaging code at the end of the sequence, after the Forms. (For example, to order a standard pack of 10 devices, specify 9013GHG2J99RZC10.) If no packaging code is indicated, the devices will be shipped individually packaged. To order a standard pack of 10 devices per box C10 (available on GHB, GHG, GSB, and GSG) see page 36 for Form C10.

Pressure codes

NOTE: Existence of a code does not imply that the code is available for any or all devices.

Settings (psi)	Code	Settings (psi)	Code
20–40	J20	110–150	J56
30–50	J21	120–150	J57
40–20	J23	125–150	J58
40–60	J24	125–175	J60
60–80	J25	130–175	J61
70–90	J26	140–170	J66
70–100	J28	140–175	J62
75–100	J29	145–175	J63
80–100	J30	150–120	J64
90–120	J31	150–175	J67
100–80	J51	215–250	J65
100–125	J53	Specify pressure settings	J99
110–125	J54	—	—

© 2023 All rights Reserved

Flange Style		
Adjustable range of setting point Contacts open on rising pressure		
Fluid Connections	1/4" NPSF internal	1/4" NPSF internal
Catalog Numbers		
NEMA Type 1, IP20	—	**9013GHG5**
NEMA Type 4	**9013GHW2**	—
Fluids / Pressure Controls	Water or air	Water or air
Pressure Range		
Cut-out psig (bar)	65–200 (4.5–13.8)	80–250 (5.5–17.2)
Cut-in psig (bar)	35–150 (2.4–10.3)	32–215 (2.2–14.8)
Weight, lb (kg)	8 (3.62)	2 (0.91)
Supplemental Specifications (not shown under General Specifications)		
Differential psig (bar)	30–50 (2.1–3.5)	25–45 (1.7–3.1)
Maximum Allowable Pressure psig (bar)	200 (13.8)	250 (17.2)
Cable Entry	2 conduit entries 3/4"-14 NTP	3 knockouts for 1/2 in. conduit
Pressure Switch Style	Diaphragm	

Modifications (Forms)
NOTE: Factory installed only.

Description	Applies to:	Form letter
Standard pack of 10 devices per box	GHB, GHG, GSB, GSG	C10
3-way lever (On-Auto-Off) not compatible with Form X	GHG, GMG, GSG	E
1 N.O. / 1 N.C. contact	All Type G	H [1]
Pulsation plug (copper)	All Type G	P
Reverse action / 2 N.O. contacts	All Type G	R [1]
Slip-on connectors (load side terminals only)	All Type G	U
2-way pressure release valve (not compatible with Form E)	GHB, GMG, GSB, GHG, GSG, GHR, GHW, GSR, GSW	X
¼" male pipe thread on pressure connection	All Type G	Z
½" - 14 NPT external ¼" - 18 NPT internal	All Type G	Z16

[1] Cannot order Form R in combination with Form H.

© 2023 All rights Reserved

Flange Style			
Adjustable range of setting point Contacts open on rising pressure			
Fluid Connections	3/8" NPSF internal	1/8" NPSF internal	1/4" NPSF internal
Catalog Numbers			
NEMA Type 1, IP20	**9013GHG6**	—	—
NEMA Type 4	—	—	**9013GHW5**
NEMA Type 7, 9	—	**9013GHR4**	—
Fluids / Pressure Controls	Water or air	Water or air	Water or air
Pressure Range			
Cut-out psig (bar)	80–250 (5.5–17.2)	80–250 (5.5–17.2)	80–250 (5.5–17.2)
Cut-in psig (bar)	32–215 (2.2–14.8)	30–190 (2.0–13.1)	30–190 (2.0–13.1)
Weight, lb (kg)	2 (0.91)	8 (3.62)	8 (3.62)
Supplemental Specifications (not shown under General Specifications)			
Differential psig (bar)	25–45 (1.7–3.1)	40–60 (2.8–4.1)	40–60 (2.8–4.1)
Maximum Allowable Pressure psig (bar)	250 (17.2)	250 (17.2)	250 (17.2)
Cable Entry	3 knockouts for 1/2 in. conduit	2 conduit entries 3/4"-14 NTP	2 conduit entries 3/4"-14 NTP
Pressure Switch Style	Diaphragm		

Ordering information

1. Select the catalog number from the table above.
2. Select the pressure code and add the code designation to the end of the catalog number. Ensure that the pressure code falls within the limits of the device as shown in the device listings.
3. If special features are desired, add the appropriate Form letter to the catalog number after the pressure code. Arrange the Form letters in alphabetical sequence when ordering more than one special feature.
4. Add the packaging code at the end of the sequence, after the Forms. (For example, to order a standard pack of 10 devices, specify 9013GHG2J99RZC10.) If no packaging code is indicated, the devices will be shipped individually packaged.
   To order a standard pack of 10 devices per box C10 (available on GHB, GHG, GSB, and GSG) see page 36 for Form C10.

Pressure codes

NOTE: Existence of a code does not imply that the code is available for any or all devices.

Settings (psi)	Code	Settings (psi)	Code
20–40	J20	110–150	J56
30–50	J21	120–150	J57
40–20	J23	125–150	J58
40–60	J24	125–175	J60
60–80	J25	130–175	J61
70–90	J26	140–170	J66
70–100	J28	140–175	J62
75–100	J29	145–175	J63
80–100	J30	150–120	J64
90–120	J31	150–175	J67
100–80	J51	215–250	J65
100–125	J53	Specify pressure settings	J99
110–125	J54	—	—

© 2023 All rights Reserved

Modifications (Forms)
NOTE: Factory installed only.

Description	Applies to:	Form letter
Standard pack of 10 devices per box	All Type G	C10
3-way lever (On-Auto-Off) not compatible with Form X	GHG, GMG, GSG	E
1 N.O. / 1 N.C. contact	All Type G	H [1]
Pulsation plug (copper)	All Type G	P
Reverse action	All Type G	R [1]
Slip-on connectors (load side terminals only)	All Type G	U
2-way pressure release valve (not compatible with Form E)	GHB, GMG, GSB, GHG, GSG, GHR, GHW, GSR, GSW	X
¼" male pipe thread on pressure connection	All Type G	Z
½" - 14 NPT external ¼" - 18 NPT internal	All Type G	Z16

[1] Cannot order Form R in combination with Form H.

© 2023 All rights Reserved

Dimensions

Type F Compressor and Water Pump Pressure Switches

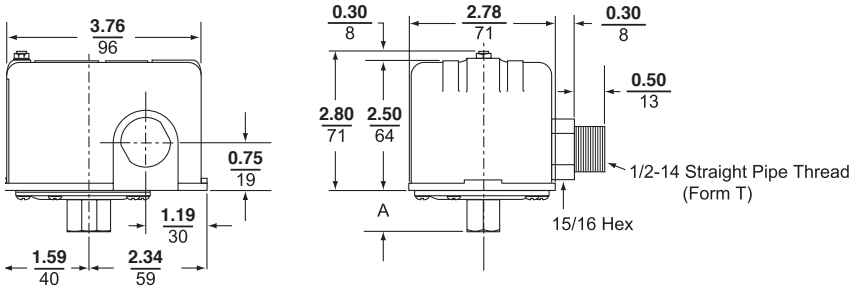

Switch Type	A Dimension, in. (mm)	
FSG1, FYG1	1-1/32	26
FHG2, 12, 22, 32, 42, 52, FRG2, FSG2, FYG2	29/32	23
FHG3, 13, 33, FRG3, FSG3, FYG3	1-9/32	33
FHG9, 19, 29, 39, 49, 59, FSG9, FYG9	1-3/32	28

Type G Compressor and Water Pump Pressure Switches

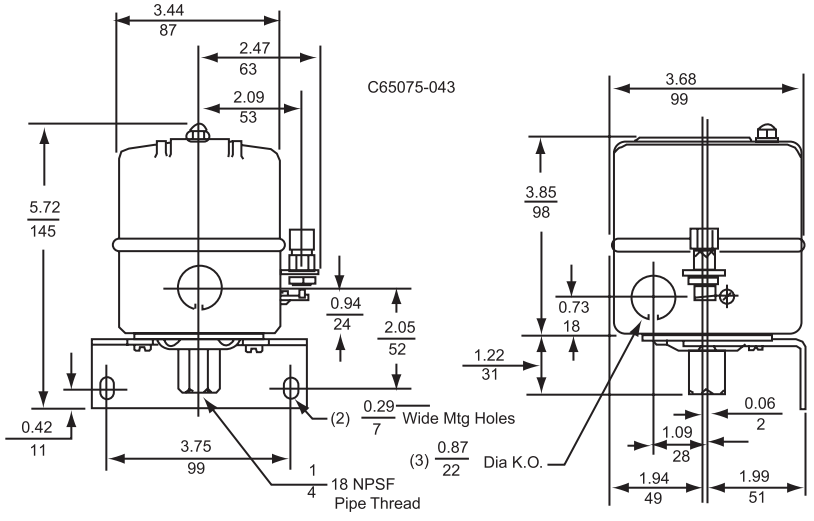

NOTE: Mounting bracket shown is available as a Class 9049 Type A52 Kit.

Switch Type: GHG, GSG (with Form X installed)

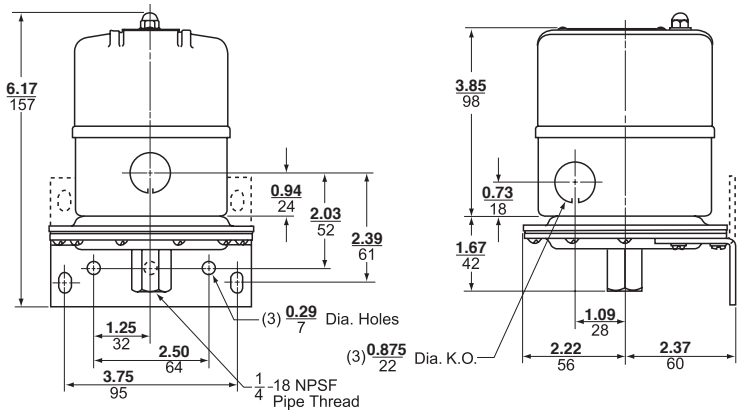

NOTE: Mounting bracket shown is available as a Class 9049 Type A52 Kit.

Switch Type: GMG

© 2023 All rights Reserved

Float Switches — Class 9036, 9037, and 9038

Introduction

9036DG2R

Telemecanique Sensors brand offers a wide range of electromechanical level control products.

- **Class 9036, Open Tank**
- **Class 9037, Closed Tank**
- **Class 9038, Mechanical Alternators**

Class 9036 Open Tank

Type D and G

9036GG2

The Class 9036 Type D and G float switches are lever operated and designed for open tank applications. These switches are floor mounted, or they can be pedestal mounted using mounting plate 9049UMS1. They are available in NEMA Type 1, Type 4, or Type 7 and 9 enclosures.

Type FG

The Class 9036 Type FG30 pedestal-style sump pump switch is designed for liquid level control with electric-motor operated pumps, either directly or through a magnetic starter. It can also be used to activate alarms in liquid level control systems. The upward or downward movement of the lever arm of the float switch controls the On and Off positions corresponding to the water level changes required to turn the pump or alarm on and off.

NOTE: The rod for this device is 33.75 in. long. It cannot be lengthened.

9036FG
9049A60
9049A61

© 2023 All rights Reserved

Class 9037 Closed Tank

9037E

Type E

The Class 9037 Type E switches are flange mounted. Float movement is transmitted through a quad ring seal. Each switch consists of a basic switch, float rod, and float. The switch can be configured in the field for contacts that open on liquid rise or close on liquid rise. These switches are used for top mounted or side mounted, closed tank applications.



9037HG

Type H

The Class 9037 Type H switches are attached to the tank by means of a 2-1/2 in. bushing. An external pointer indicates the float position within the tank when the unit is mounted. Switches come complete with stainless steel float and rod. A nitrile rubber seal, such as a Buna-N quad ring seal, is used between the float rod and the sealing connector. Normal application is at atmospheric pressure. Where higher pressures are encountered, the available Viton® seal allows the switch to withstand tank pressures up to 50 psi at ambient temperatures up to 200 °F. Occasional replacement of the quad ring seal may be necessary.

Class 9038 Mechanical Alternators



9038AG1

Type A (Open Tank)

The Class 9038 Type A Open Tank level switch is a mechanical alternator designed to provide motor alternation in the operation of two motors.

9038CG36

Type C (Closed Tank, Bushing Mounted)

The Class 9038 Type C Closed Tank level switches are bushing mounted. Float movement is transmitted through a quad ring seal. Each switch consists of a basic switch, rod, and float.

Type C switches are attached to the tank by means of a 2-1/2 in. bushing. An external pointer indicates the float position within the tank when the unit is mounted. Switches come complete with bushing, stainless steel float, and rod.

Occasional replacement of the quad ring may be necessary.

9038DG
9049ER5
9049EF1

Type D (Closed Tank, Flange Mounted, Top)

Type D mechanical alternators are designed for applications where flange mounting is to be made at the top of a closed tank.

© 2023 All rights Reserved

PUMPTROL™

9036DG2

9036GG2

Selecting a Float Switch

Standard float switches have two contacts that close when the liquid rises above the designated level. This contact configuration is used for tank emptying applications. Float switches are also available with reverse (Form R) and double throw (Form H) contacts. Form R switches, used for tank filling applications, have two contacts that open when the liquid rises above the designated level. Form H switches, which can be used for both applications, have one normally open (N.O.) and one normally closed (N.C.) contact.

To select the proper Telemecanique Sensors float switch, determine the following:

- Type and shape of tank (open, closed, sump, etc.)
- Enclosure requirements
  - **NEMA Type 1:** For general purpose applications intended for indoor use.
  - **NEMA Type 4:** For watertight and dusttight applications for either indoor or outdoor use.
  - **NEMA Type 7 and 9:** For explosion proof applications. Suitable for Class I, Division 1 and 2, Groups C and D and Class II, Division 1 and 2, Groups E, F, and G hazardous locations.
- Total level change required
- Mounting requirements (such as flange mounting or screw-in bushing)
- Horsepower, phase, and voltage requirements
- Float material
  - Stainless steel (SS)
  - Plastic (available on 9036FG30 and as a Form for use with diesel fuel)
- Rod material
  - Brass
  - Stainless steel (SS)

In direct motor control applications, float switch ratings must be greater than or equal to the pump motor ratings.

NOTE: Contact the Sensor Competency Center when using float switches in liquids with a specific gravity different than water (1.0).

Specify the Class and Type when ordering float switches or accessory kits.

Selecting Floats and Rods

Class 9036 and Class 9038 Type A float switches are actuated with the Class 9049 Type A line of accessories. Select the float and rod material according to the corrosiveness of the liquid used in the application. Two types of float kits are offered:

- Tapped-at-top float (Class 9049 Type A6, A6S)
- Center-hole float (Class 9049 Type A6C, A6CS)

The tapped-at-top float is for applications requiring short lengths of tubing and small liquid level changes. The maximum tubing length is 12 ft (3.66 m). Adequate space must be available to allow for ceiling clearance when the level changes. The float must be buoyant enough to lift the tubing, stop collars, and switch lever. The rod has two stops, one above and one below the switch lever. The position of the stops determines the amount of water level change.

© 2023 All rights Reserved

The center-hole float is used in applications requiring long lengths of tubing and large liquid level changes. A compensating spring, used for longer lengths of tubing, supports the weight of the tubing and stops. When a compensating spring is used, the float must be buoyant enough to lift up the switch lever and heavy enough to trip the switch lever down. The rod has four stops. The position of the stops on the rod above and below the float determines the amount of water level change.

Temperature Ratings

Table 8 : Temperature Limitations for all Float Switches

Ambient	**Min.**	–22 °F (–30 °C)
	Max.	200 °F (93 °C)

Electrical Ratings

Table 9: Class 9036, 9037, and 9038 Electrical Ratings

Class	Type	Single Phase AC Ratings (hp)			Polyphase AC Ratings (hp)			DC (hp)			Control Circuit Rating
		115 V	230 V	460/575 V	115 V	230 V	460/575 V	32 V	115 V	230 V	
9036	D (2 pole)	2	3	—	3	5	1	0.25	0.5	0.5	A600
	G (2 pole)	2	3	5	3	5	5	0.5	1	1	A600
	G Form H (1 N.O., 1 N.C.)	1	2	2	—	—	—	—	0.5	0.5	A300
9037	E, H (2 pole)	2	3	—	3	5	1	0.25	0.5	0.5	A600
9038	All (2 pole)	2	3	—	3	5	1	0.25	0.5	0.5	A600

The following float switches are UL Listed:

- Class 9036 Types DG, DW, GG, GW
- Class 9037 Types EG, EW, HG, HW
- Class 9038 Types AG, AW, CG, CW, DG, DW

The following float switches are UL Listed for hazardous area:

- Class 9036 Types DR, GR
- Class 9037 Types ER, HR

Table 10: Control Duty Circuit Ratings (Form N5 or N25 only)

Contacts	AC — 50 or 60 Hz						DC			AC or DC
	V	Inductive, 35% Power Factor				Resistive, 75% Power Factor	V	Inductive and Resistive		Continuous Carrying Amperes
		Make		Break		Make and Break Amperes		Make and Break Amperes		
		A	VA	A	VA			Single Throw	Double Throw	
SPDT Form N5	120	60	7200	6	720	6	120	0.55	0.22	10
	240	30	7200	3	720	3	250	0.27	0.11	10
	480	15	7200	1.5	720	1.5	600	0.10	—	10
	600	12	7200	1.2	720	1.2	—	—	—	—
DPDT Form N25	120	60	7200	6	720	6	125	0.22	0.22	10
	240	30	7200	3	720	3	250	0.11	0.11	10
	480	15	7200	1.5	720	1.5	600	—	—	10
	600	12	7200	1.2	720	1.2	—	—	—	—

PUMPTROL™

© 2023 All rights Reserved

Class 9036 Type D and G Open Tank Float Switches

Table 11 lists Class 9036 float switches and modifications.

- When ordering a **factory installed modification**, add the Form number to the end of the float switch catalog number. For example, to select a 9036DG2 switch with reverse action, order 9036DG2R.
- **Field installed modifications**, when available, are ordered as kits.

Table 11: Class 9036 Float Switches

Specifications				
Description	2-pole, single-lever operated float switches			
Applications	Open industrial tanks and sump applications			
	General Purpose		**Heavy Duty**	
Catalog Numbers				
Contact Action	**Close on Liquid Rise**	**Open on Liquid Rise**	**Close on Liquid Rise**	**Open on Liquid Rise**
NEMA Type 1 [1]	**9036DG2**	**9036DG2R**	**9036GG2**	**9036GG2R**
NEMA Type 4	**9036DW31**	**9036DW31R**	**9036GW1** [2]	**9036GW1R** [2]
NEMA Type 7, 9	**9036DR31**	**9036DR31R**	**9036GR1** [2]	**—**
NOTE: A compensating spring supports the weight of long rods that cannot be supported by center-hole floats. A compensating spring is standard on Types GR and GW, and can be ordered as a modification (Form C) on other Class 9036 Type D and G float switches.				
Modifications			**Factory Installed**	**Field Installed**
			Class 9036 Form	**Kit Catalog Number**
For Type D (General Purpose)				
Reverse action (Type DG)			R	**9049A58**
Compensating spring and reverse action (Types DG, DR, and DW)			CR	—
For Type G (Heavy Duty)				
Reverse action [3]			R	—
Compensating spring (Type GG) [4]			C	**9049A13**
1 N.O.–1 N.C. contact configuration			H	—

[1] Contact action can be converted in the field by installing the appropriate float rod lever.

[2] Compensating spring standard. Use center-hole float accessories.

[3] Type GG is field convertible without the use of a kit. Types GR and GW are not field convertible.

[4] Compensating spring standard on Types GR and GW.

© 2023 All rights Reserved

Table 12 lists the trip forces and compensating spring requirements for Class 9036 Type D and G float switches. The trip force can be adjusted on the Type G switches by changing the lever length position.

Table 12: Maximum Trip Forces for Class 9036 Float Switches

Class 9036 Type and Form		DG2	DG2R	DW31	DW31R	DR31	DR31R	GG2		GG2R		GR1, GW1		
Lever Length Position		—	—	—	—	—	—	Short	Long	Short	Long	Short	Medium	Long
Force Up to Trip (oz)		9	8	8	8	8	8	33	21	30	22	24	22	20
Force Down to Trip (oz)		8	8	8	8	8	8	39	27	24	16	31	29	27
Maximum Supported Weight (oz)	Without Compensating Spring	6	4	5	5	5	5	25	13	18	11	19	17	16
	With Compensating Spring	60	60	66	66	66	66	[1]	100	[1]	150	80	72	64

[1] The compensating spring is not effectiwve in combination with short lever length position.

Figure 3: Lever Length

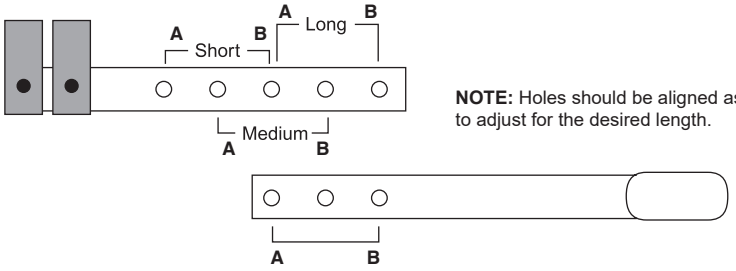

NOTE: Holes should be aligned as shown to adjust for the desired length.

Table 13 lists Class 9049 accessory kits, which are ordered separately from Class 9036 Type D and G float switches. A **float kit** is required; a tubing kit and replacement float do not provide all needed parts.

Table 13: Class 9049 Accessories for Class 9036 Type D and G Float Switches (weight in oz)

Accessory Kits	Tapped-at-Top Floats (#304 SS)		Center-Hole Floats (#304 SS) [1]		Additional Tubing (#303 SS) [2]	
Used on Class 9036 Float Switch Types	All Except GW, GR, and Form C		GW, GR, and Form C		All	
Catalog Number	9049A6	9049A6S	9049A6C	9049A6CS	9049T1	9049T1S
Tubing (rod)	5 ft brass	5 ft SS	5 ft brass	5 ft SS	2.5 ft brass	2.5 ft SS
Net buoyancy in water, 7 in. float [3]	60	60	70	70	—	—
Combined weight of stops	3	3	6	6	—	—
Number of stops	2	2	4	4	—	—
Weight of 5 ft rod, included	18.5	16.9	18.5	16.9	—	—
Weight per ft of extra rod	3.7	3.4	3.7	3.4	3.7	3.4

[1] Require the use of the 9049A6 or 9049A6S kit. The additional tubing only attaches to other lengths of tubing.

[2] Additional tubing kits add on to the float accessory kits and include a connector.Maximum recommended tubing length: **Tapped-at-top float:** 12.5 ft (3810 mm); **Center-hole float:** 30 ft (9144 mm).

[3] Net buoyancy calculated with float 80% submerged, allowing for a 20% operating margin. Buoyancy data calculated for use in water. Consult the Sensor Competency Center for buoyancy data in media having specific gravity different than water (1.0).

When ordering, first specify the desired accessory kit, then as a second item give the number of additional tubing kits required. For example, to get a 9049A6C kit with 15 ft of tubing, specify:

A. 9049A6C, quantity = 1 (includes 5 ft of tubing)

B. 9049T1, quantity = 4 (2.5 ft of tubing each, for a total of 10 additional ft)

Example	Calculation example Measuring 15 ft of tank depth	Float buoyancy	70.0 oz
		Total weight	(61.5 oz)
	System has 15 ft of brass rod, 4 stops, and a center hole float.	Weight of stops:	(6.0 oz)
	Buoyancy is positive, so no compensating spring is required	Weight of 5 ft of brass rod (included):	(18.5 oz)
		Weight of 10 ft of brass rod (separate):	(37.0 oz)
		Buoyancy	8.5 oz

PUMPTROL™

© 2023 All rights Reserved

Figure 4: Type DG Dimensions

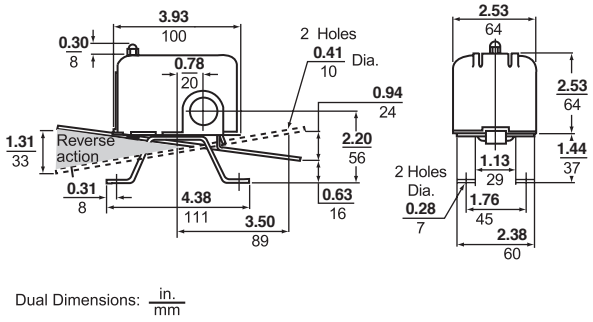

Figure 5: Types DR/DW Dimensions

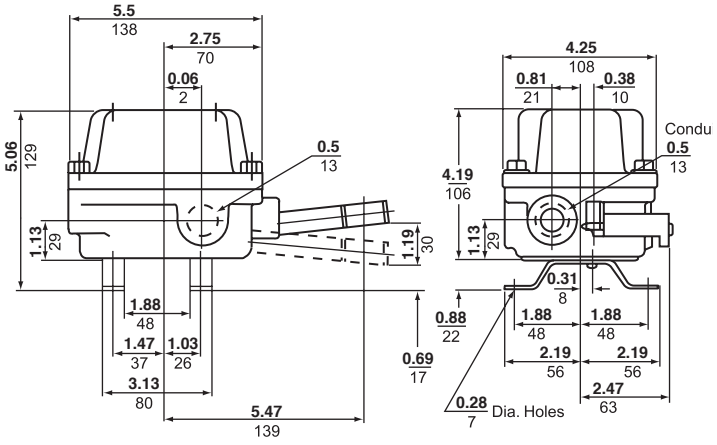

Figure 6: Type GG Dimensions

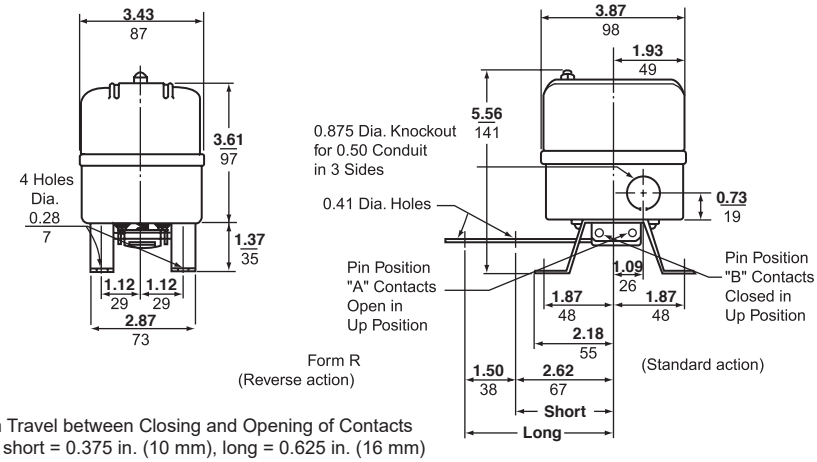

Lever Arm Travel between Closing and Opening of Contacts
Standard: short = 0.375 in. (10 mm), long = 0.625 in. (16 mm)
Form R: short = 0.5 in. (13 mm), long = 0.75 in. (19 mm)

Figure 7: Types GR/GW Dimensions

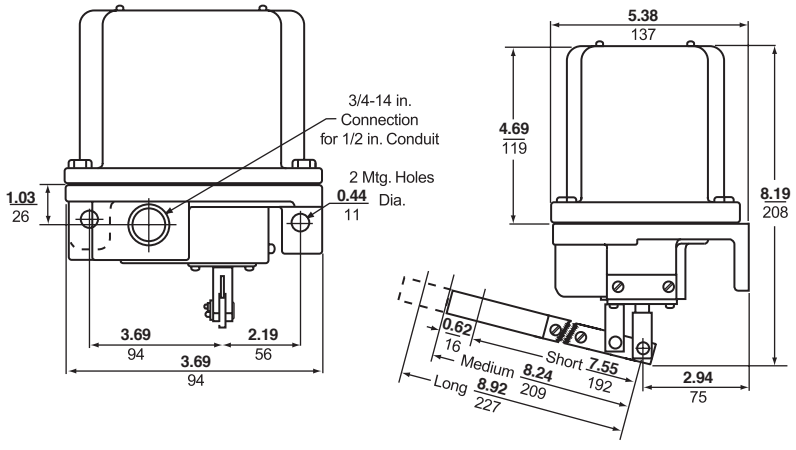

Float Lever Travel between Closing and Opening of Contacts:
short = 1 in. (25 mm), medium = 1.12 (28 mm), long = 1.25 in. (31.8)

PUMPTROL™

© 2023 All rights Reserved

Class 9036 Type FG and Class 9049 Accessories

Class 9036 Type FG30 pedestal-style sump pump switches provide:

• Liquid level control with pumps operated by an electric motor, either directly or through a magnetic starter

• Activation of alarms in liquid level control systems

• Forward or reverse action (field selectable)

The upward or downward movement of the lever arm controls the On and Off positions corresponding to the water level changes required to turn the pump or alarm on and off.

Table 14: Class 9036 Type FG30 Pedestal-Style Sump Pump Switch and Accessory Kits

Catalog Number		Pedestal-style Sump Pump Switch		Accessory Kits	
		9036FG30		9049A60	9049A61
Description		2-pole, pedestal-style sump pump switch		Plastic center hole float	33.75 in. aluminum rod, 2 float stop assemblies, and attaching hardware
Quantity Required		1		1	1
NEMA Type		NEMA Type 1		—	—
Contact Action		Contacts close on liquid rise		—	—
Rod Length		—		—	33.75 in. (cannot be lengthened)
Voltage		120/240 Vac		—	—
Horsepower Rating	Single phase	2 hp @ 120 Vac	3 hp @ 240 Vac	—	—
	Polyphase	3 hp @ 120 Vac	5 hp @ 240 Vac	—	—

Example:

9036FG
9049A60
9049A61

PUMPTROL™

© 2023 All rights Reserved

Class 9037 Type E Closed Tank Float Switches

Class 9037 closed tank float switches are used primarily on condensate pumps but may also be installed on closed industrial and diesel fuel day tanks. There are two types of Class 9037 float switches:

- Type E (flange mounted)
- Type H (with screw-in bushing)

Class 9037 Type E Flange-Mounted Float Switches

Table 15 contains ordering information for Class 9037 Type E float switches. Order the rod and float accessory kits separately. Contact the Sensor Competency Center when using Class 9037 float switches in liquids with a different specific gravity than water (1.0).

Float Position 1



Float Position 2



Float Position 3



Table 15: Class 9037 Type E Float Switches

Specifications		
Application		Closed industrial tanks Flange mounted
Float movement		Transmitted through a quad ring seal, which may need occasional replacement
Tank Pressure		Up to 50 psi
Temperature	**Ambient**	Up to 200 °F
	Media	Buna-N seal: up to 215 °F. Viton® seal: up to 250 °F.
Contact Operation		Determined by the float and rod mounting position
Float Travel		Determined by the post length

Catalog Numbers				
Post Length (L), in. (mm)	2.63 (67)		4.69 (119)	
Water Level Change	**Minimum**	**Maximum**	**Minimum**	**Maximum**
NEMA 1	**9037EG8**	**9037EG9**	**9037EG10**	**9037EG13**
NEMA 4	--	**9037EW9**	--	**9037EW13**
NEMA 7, 9	--	**9037ER9**	--	
Float Position [1]	1	1, 2, 3	1	1, 2, 3

Float Kits	
Material	**Catalog Number**
#304 Stainless Steel	**9049EF1**
#316 Stainless Steel	**9049EF2**

[1] For more information on float position, refer to pages 50–51.

For rod kit catalog numbers, refer to pages 50 and 51.

To receive all components packaged in a single carton, specify:

- Float switch Class, Type, and Form
- “R” and the rod number
- “F” and the float number

For example, to receive one each of 9037EG8, 9049ER1, and 9049EF1, specify **9037EG8R1F1**

PUMPTROL™

© 2023 All rights Reserved

Figure 8: Type EG Dimensions

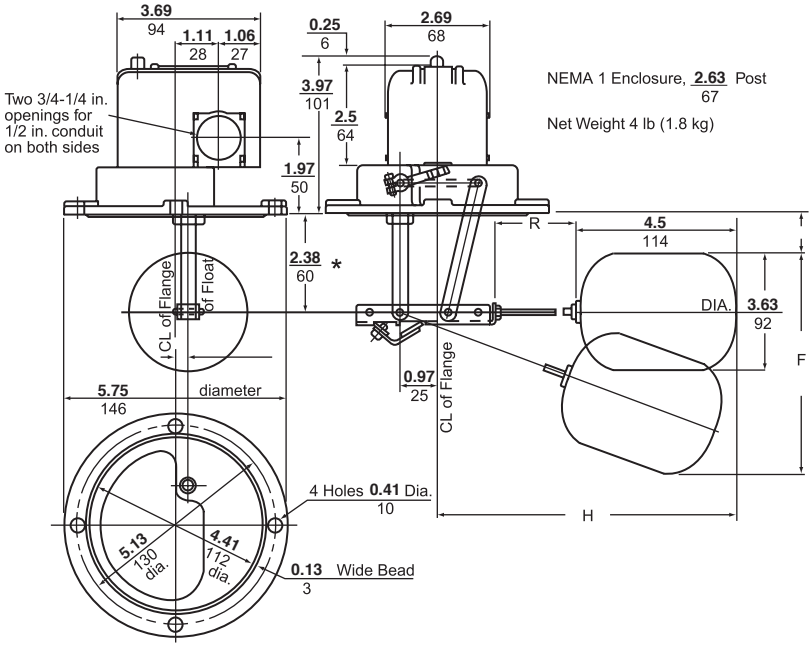

Figure 9: Type ER/EW Dimensions

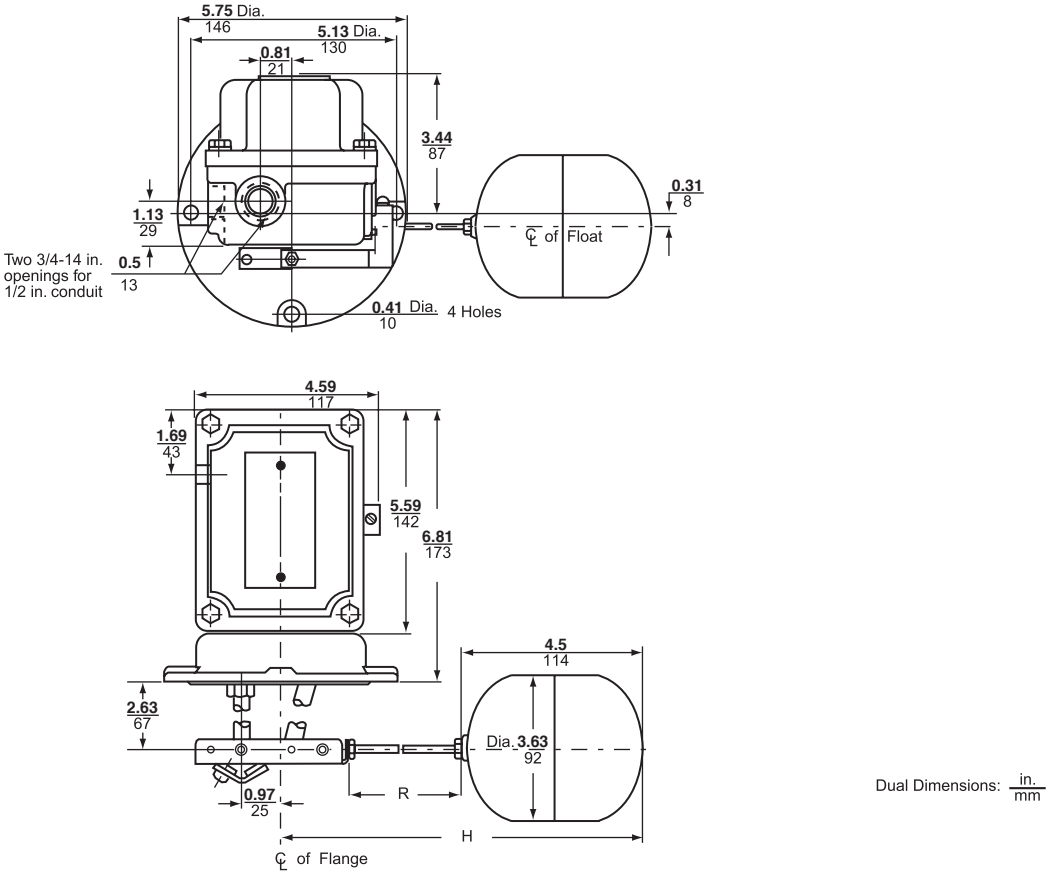

© 2023 All rights Reserved

Class 9037 Type E Closed Tank Rod Kits

Position 1 Operation

In Position 1, the contacts *close* when the liquid rises. Select rod kits from Table 16.

Table 16: Class 9049 Rod Kits—Position 1 Operation (Contacts *Close* on Liquid Rise)

Catalog Numbers								
Dimension in. (mm)		For Use on Float Switch Types	Rod Kits					
			9049ER1	9049ER2	9049ER3	9049ER5	9049ER7	9049ER12
R		EG8, EW8, ER8, EG10, EW10, ER10	1.75 (44)	2.5 (64)	3.25 (83)	5.25 (133)	7.25 (184)	12.25 (311)
		EG9, EW9, ER9, EG13, EW13, ER13	1.75 (44)	2.5 (64)	3.25 (83)	5.25 (133)	7.25 (184)	12.25 (311)
H		EG8, EW8, ER8, EG10, EW10, ER10	8.25 (210)	9 (229)	9.5 (241)	11.75 (298)	13.75 (349)	18.75 (476)
		EG9, EW9, ER9, EG13, EW13, ER13	7.5 (191)	8.25 (210)	9 (229)	11 (279)	12 (305)	18 (457)
A	Min.	EG8, EW8, ER8	1 (25)	1 (25)	1 (25)	1 (25)	1 (25)	1 (25)
		EG9, EW9, ER9	1 (25)	1 (25)	1 (25)	1 (25)	1 (25)	1 (25)
		EG10, EW10, ER10	3.06 (78)	3.06 (78)	3.06 (78)	3.06 (78)	3.06 (78)	3.06 (78)
		EG13, EW13, ER13	3.06 (78)	3.06 (78)	3.06 (78)	3.06 (78)	3.06 (78)	3.06 (78)
	Max.	EG8, EW8, ER8	2 (51)	2 (51)	2 (51)	2.5 (64)	3 (76)	4.25 (108)
		EG9, EW9, ER9	4 (102)	4.5 (114)	5 (127)	6 (152)	7.5 (191)	9.5 (241)
		EG10, EW10, ER10	4.06 (103)	4.06 (103)	4.06 (103)	4.56 (116)	5.06 (129)	6.31 (160)
		EG13, EW13, ER13	6.06 (154)	6.56 (167)	7.06 (179)	8.06 (205)	9.56 (243)	11.56 (294)
F	Min.	EG8, EW8, ER8, EG10, EW10, ER10	4.75 (121)	4.75 (121)	4.75 (121)	4.75 (121)	5 (127)	5.75 (146)
		EG9, EW9, ER9, EG13, EW13, ER13	6 (152)	6.25 (159)	6.25 (159)	6.5 (165)	6.5 (165)	9 (229)
	Max.	EG8, EW8, ER8, EG10, EW10, ER10	6 (152)	6.25 (159)	6.5 (165)	6.75 (171)	7.25 (184)	9 (229)
		EG9, EW9, ER9, EG13, EW13, ER13	9 (229)	9.75 (248)	10.25 (260)	11.5 (292)	13 (330)	17.5 (445)
Water Level Change	Min.	EG8, EW8, ER8, EG10, EW10, ER10	1.75 (44)	1.75 (44)	1.75 (44)	1.75 (44)	2 (51)	2.75 (70)
		EG9, EW9, ER9, EG13, EW13, ER13	3 (76)	3.25 (83)	3.25 (83)	3.5 (89)	3.5 (89)	6 (152)
	Max.	EG8, EW8, ER8, EG10, EW10, ER10	3 (76)	3.25 (83)	3.5 (89)	3.75 (95)	4.25 (108)	6 (152)
		EG9, EW9, ER9, EG13, EW13, ER13	6 (152)	6.75 (171)	7.25 (184)	8.5 (216)	10 (254)	14.5 (368)

Figure 10: Float Position 1

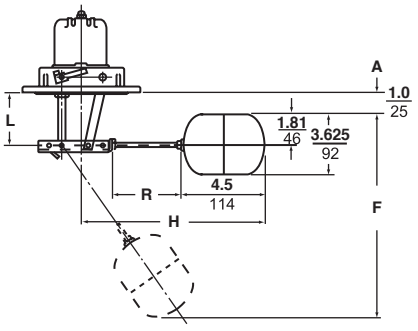

Figure 11: Float Position 2

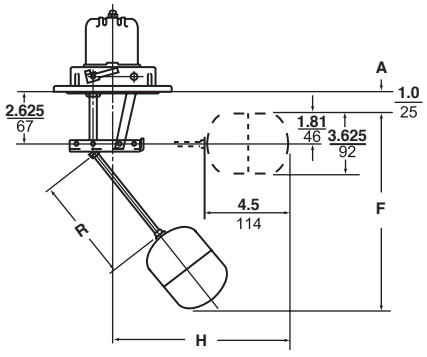

Figure 12: Float Position 3

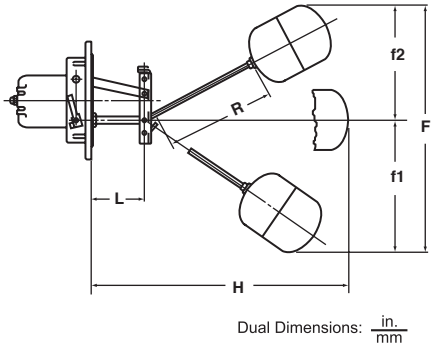

Dual Dimensions: in. / mm

© 2023 All rights Reserved

Position 2 Operation

In Position 2, the contacts *open* when the liquid rises. Select rod kits from Table 17.

Table 17: Class 9049 Rod Kits — Position 2 Operation (Contacts *Open* on Liquid Rise)

Catalog Numbers								
Dimension in. (mm)		For Use on Float Switch Types	Rod Kits					
			9049ER1	9049ER2	9049ER3	9049ER5	9049ER7	9049ER12
R		EG9, EW9, ER9, EG13, EW13, ER13	1.75 (44)	2.50 (64)	3.25 (83)	5.25 (133)	7.25 (184)	12.25 (311)
H		EG9, EW9, ER9, EG13, EW13, ER13	7.50 (191)	8.25 (210)	9.00 (229)	11.00 (279)	13.00 (330)	18.00 (457)
A	Min.	EG9, EW9, ER9	1.00 (25)	1.00 (25)	1.00 (25)	1.00 (25)	1.00 (25)	1.00 (25)
		EG13, EW13, ER13	3.06 (78)	3.06 (78)	3.06 (78)	3.06 (78)	3.06 (78)	3.06 (78)
	Max.	EG9, EW9, ER9	3.00 (76)	3.50 (89)	4.00 (102)	5.00 (127)	6.00 (152)	8.50 (216)
		EG13, EW13, ER13	5.06 (129)	5.56 (141)	6.06 (154)	7.06 (179)	8.06 (205)	10.56 (268)
F	Min.	EG9, EW9, ER9, EG13, EW13, ER13	5.25 (133)	5.75 (146)	6.00 (152)	6.75 (171)	7.75 (197)	10.25 (260)
	Max.	EG9, EW9, ER9, EG13, EW13, ER13	7.25 (184)	8.25 (210)	9.00 (229)	10.75 (273)	12.75 (324)	17.75 (451)
Water Level Change	Min.	EG9, EW9, ER9, EG13, EW13, ER13	2.75 (70)	2.75 (70)	3.00 (76)	3.75 (95)	4.75 (121)	7.25 (184)
	Max.	EG9, EW9, ER9, EG13, EW13, ER13	4.25 (108)	5.25 (133)	6.00 (152)	7.75 (197)	9.00 (229)	12.25 (311)

Position 3 Operation

In Position 3, the contacts can be set to open (standard) or close (sump) on liquid rise by turning the control switch 180° around its horizontal center line. Select rod kits from Table 18.

Table 18: Class 9049 Rod Kits—Position 3 Operation (Contact Operation Adjustable)

Catalog Numbers								
Dimension in. (mm)		For Use on Float Switch Types	Rod Kits					
			9049ER1	9049ER2	9049ER3	9049ER5	9049ER7	9049ER12
R		EG9, EW9, ER9, EG13, EW13, ER13	1.75 (44)	2.50 (64)	3.25 (83)	5.25 (133)	7.25 (184)	12.25 (311)
H		EG9, EW9, ER9	9.00 (229)	9.75 (248)	10.50 (267)	12.50 (318)	14.50 (368)	19.50 (495)
		EG13, EW13, ER13	11.00 (279)	11.75 (298)	12.50 (318)	14.50 (368)	16.50 (419)	21.50 (546)
f1 or f2	Min.	EG9, EW9, ER9, EG13, EW13, ER13	2.75 (70)	2.75 (70)	3.00 (76)	3.50 (89)	3.75 (95)	4.50 (114)
	Max.	EG9, EW9, ER9, EG13, EW13, ER13	4.50 (114)	4.50 (114)	5.00 (127)	6.00 (152)	7.00 (178)	9.50 (241)
F	Min.	EG9, EW9, ER9, EG13, EW13, ER13	5.50 (140)	5.50 (140)	6.00 (152)	7.00 (178)	7.50 (191)	8.75 (222)
	Max.	EG9, EW9, ER9, EG13, EW13, ER13	9.00 (229)	9.00 (229)	10.00 (254)	12.00 (305)	14.00 (356)	19.00 (483)
Water Level Change	Min.	EG9, EW9, ER9, EG13, EW13, ER13	2.25 (57)	2.25 (57)	2.75 (70)	3.75 (95)	4.25 (108)	5.5 (140)
	Max.	EG9, EW9, ER9, EG13, EW13, ER13	5.75 (146)	5.75 (146)	6.75 (171)	8.75 (222)	10.75 (273)	15.75 (400)

© 2023 All rights Reserved

9037HG35
Float on the Right

Class 9037 Type H with Screw-in Bushing

Table 19 contains ordering information for Class 9037 Type H float switches and factory installed modifications. Contact the Sensor Competency Center when using float switches in liquids with a different specific gravity than water (1.0).

When ordering factory installed modifications, add the Form number to the end of the float switch catalog number. For example, to select a 9037HG36 switch with reverse action, order 9037HG36R.

Table 19: Class 9037 Type H Float Switches

Specifications										
Application	Condensate pumps A 2.5 in. cast-iron bushing attaches the float switch to the tank									
Float movement	Transmitted through a nitrile rubber seal such as a Buna-N quad ring. Occasional replacement may be necessary.									
Tank Pressure	Up to 50 psi									
Temperature **Ambient**	Up to 200 °F									
Media	Buna-N seal: up to 215 °F. Viton® seal: media up to 250 °F.									
Contact Operation	Close on liquid rise (standard) Open on liquid rise (Form R)									
Float Travel	Determined by the float rod angle. An external pointer indicates the float position.									
Materials (Standard)	#304 SS float, #316 SS rod, 2.5 in. cast iron bushing, brass sealing connector, Buna-N quad ring packing.									
Catalog Numbers										
Float Rod Angle	**45°**		**90° offset**							
Water Level Change Minimum–Maximum, in. (mm)	2.00–5.00 (52–127)		2.50–5.00 (64–127)		3.75–7.00 (95–178)		4.25–8.25 (108–210)		6.00–11.50 (152–292)	
Float Position [1]	Left	Right	Left	Right	Left	Right	Left	Right	Left	Right
NEMA Type 1	**9037HG34**	**9037HG33**	**9037HG36**	**9037HG35**	**9037HG38**	**9037HG37**	**9037HG30**	**9037HG39**	**9037HG32**	**9037HG31**
NEMA Type 4	**9037HW34**	**9037HW33**	**9037HW36**	**9037HW35**	---	**9037HW37**	**9037HW30**	---	**9037HW32**	**9037HW31**
NEMA Type 7, 9	---	**9037HR33**	**9037HR36**	---	**9037HR38**	---	**9037HR30**	---	**9037HR32**	---
CL to CL in. (mm)	—		3 (76)		4.25 (108)		5 (127)		7 (178)	

Modifications	**Form**
Omit 2.5 in. bushing	F3
Omit float	L
Reverse action: contacts open on liquid rise	R [2]
Viton packing, 5 oz float (diesel fuel, Types HG, HW, HR30, 31, 32, 37, 38, 39 only)	Z19
Viton packing, for media temperature up to 250 °F	Z20
Viton packing, #316 SS float	Z21
Pack of 8 pcs	C8

[1] Viewed from the front of the switch, facing the indicator scale.

[2] Type HG is field modifiable. Type HR and HW cannot be modified in the field.

NOTE: For replacement floats, see “Class 9049 Accessories” on page 55.

© 2023 All rights Reserved

Table 20 lists the float travel distances for the screw-in float switches. Refer to Figure 13.

Figure 13: Travel Dimensions



Table 20: Type H Float Travel Distances, in. (mm)

Float Rod Angle	R	H [1]	f1		f2		F	
			Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
45°	—	6.22 (158)	2.25 (57)	4.50 (114)	2.00 (52)	4.50 (110)	4.25 (108)	9.00 (229)
90° offset	3.00 (76)	4.25 (108)	2.75 (70)	4.25 (108)	2.25 (57)	4.25 (108)	5.00 (127)	7.50 (191)
90° offset	4.25 (108)	5.50 (140)	3.50 (89)	5.50 (140)	2.75 (70)	4.00 (102)	6.25 (159)	9.50 (241)
90° offset	5.00 (127)	6.25 (159)	3.75 (95)	6.25 (159)	3.00 (76)	4.50 (110)	6.75 (171)	10.75 (273)
90° offset	7.00 (178)	8.25 (210)	4.75 (121)	8.25 (210)	3.75 (95)	5.75 (146)	8.50 (216)	14.00 (356)

[1] Clearance from centerline of hub to side of tank.

Figure 14: Type HG—45° Angle Dimensions

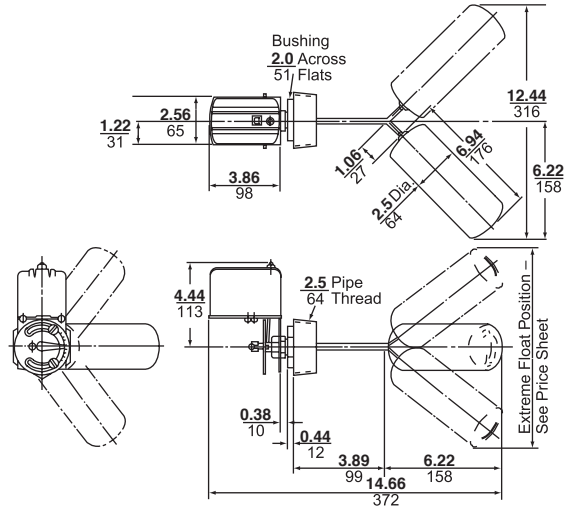

Figure 15: Type HG—90° Offset Dimensions

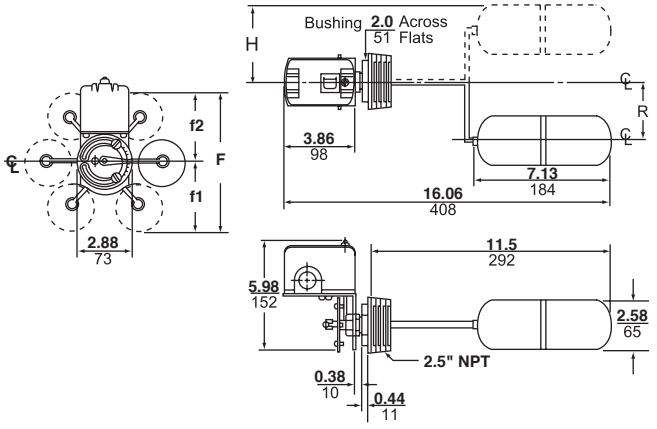

Figure 16: Type HR/HW—45° Angle Dimensions

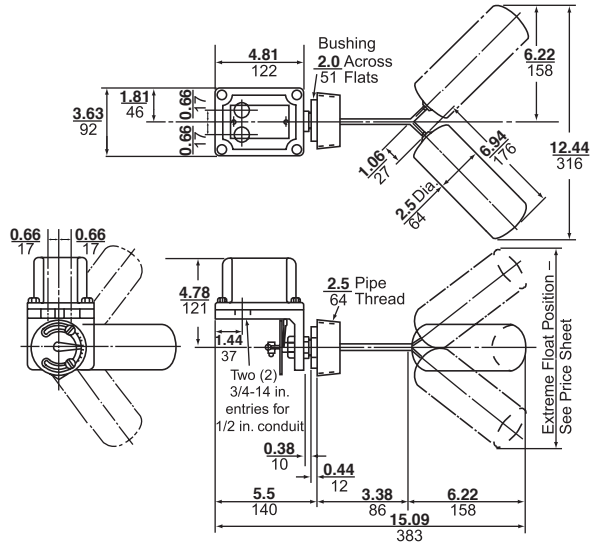

Figure 17: Type HR/HW—90° Offset Dimensions

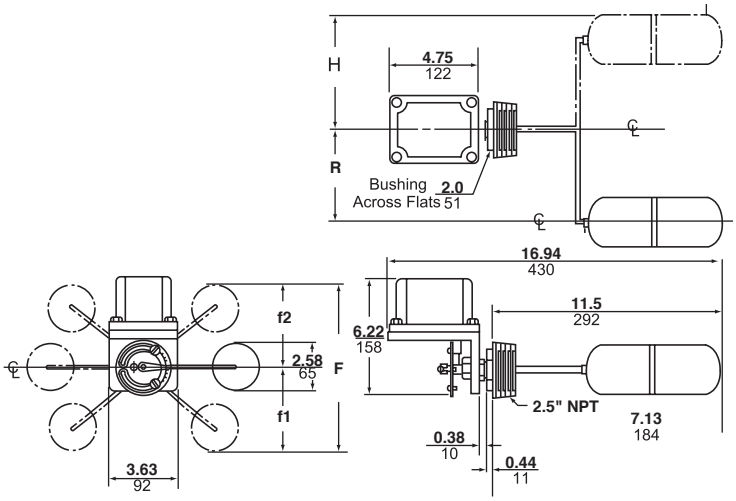

PUMPTROL™

© 2023 All rights Reserved

Class 9038 Type A Mechanical Alternators

Class 9038 mechanical alternators provide a simple, positive means of mechanically alternating two pumps or motors. These alternators are used on devices that are installed in a duplex system with a common tank. There are three types of Class 9038 mechanical alternators:

- Type A (open tank and sump)
- Type C (with bushing)
- Type D (flange mounted, vertical)

When liquid level rises to the first level, one pump turns on. Both pumps automatically turn on when a peak condition occurs and the liquid level continues to rise. If Form N5 or N25 is present, and the water level continues to rise, a high water alarm is activated.

Mechanical alternators can be ordered with a manual transfer selector switch (Form N3), which allows the operator to select which pump cuts in first. The second pump only operates under peak demand conditions or if the first pump fails. When the switch is disengaged, the alternator reverts to normal operation. Another option (Form N4) allows the alternator to be used as a two-level non-alternating unit.



9038AG1

Class 9038 Type A Open and Sump Tank Mechanical Alternators

Table 21 contains ordering information for Class 9038 Type A mechanical alternators, including factory installed modifications. Order float accessories separately. Contact the Sensor Competency Center when using Class 9038 alternators in liquids with a different specific gravity than water (1.0).

When ordering a factory modification, add the Form number to the end of the mechanical alternator catalog number. For example, to select a 9038AG1 alternator with reverse action, order 9038AG1R.

Table 21: Class 9038 Type A Mechanical Alternators

Specifications	
Application	Open and sump tanks using duplex pumps
Float Movement	Float operated
Ambient Temperature	–22 to +200 °F
Contact Operation	Close on liquid rise (standard) Open on liquid rise (Form R)
Catalog Numbers	
NEMA 1	**9038AG1**
NEMA 4 (compensating spring standard)	**9038AW1**
NEMA 7, 9 (compensating spring standard)	**9038AR1**
Modifications **NOTE:** Factory installed only.	**Form**
Compensating spring (Type AG)	C (field installable)
Two-level, non-alternating unit	N4
High water alarm circuit (single pole)	N5

© 2023 All rights Reserved

Table 22 lists the operating forces for Class 9038 Type A alternators. Use this table when selecting additional tubing or when selecting floats and rods for accessories made by other manufacturers.

Table 22: Class 9038 Type A Operating Forces

Catalog Number		9038AG1		9038AG1R		9038AR1/9038AW1	9038AR1R/9038AW1R
Lever Length Position		**Minimum**	**Maximum**	**Minimum**	**Maximum**	**Standard**	**Standard**
Force Up to Trip (oz), without Form C [1]		18	16	14	11	-	-
Force Down to Trip (oz), without Form C [1]		20	17	16	12	-	-
Maximum Rod Length Supported by the Compensating Spring ft (m) [2]	**Brass**	10 (3.05)	8 (2.44)	7 (2.13)	6 (1.83)	16 (4.88)	19 (5.79)
	Stainless Steel	12 (3.66)	10 (3.05)	8 (2.44)	7 (2.13)	20 (6.1)	23 (7.01)
Maximum Weight of Tubing and Stops Supported by the Compensating Spring (oz)		47	41	33	30	74	85

[1] Add 2 oz for high water alarm (Form N5 or N25).

[2] Rod length determined using Class 9049 rod material (0.38 in. / 10 mm O.D. tubing).

[3] Other types of rod must be weighed and compared to the “Maximum Weight of Tubing and Stops” row above.

Accessory Kits

Table 23 lists the Class 9049 accessory kits for Class 9038 Type A alternators. The accessories are ordered separately from the alternators. Order tapped-at-top floats for Type AG1 (except form C) and center-hole floats for Types AG1C, AW1, and AR1.

Table 23: Class 9049 Accessories for Class 9038 Type A Float Switches (weight in oz)

Accessory Kits	Tapped-at-Top Floats (#304 SS)		Center-Hole Floats (#304 SS)		Additional Tubing [1]	
Catalog Numbers	**9049A6**	**9049A6S**	**9049A6C**	**9049A6CS**	**9049T1**	**9049T1S**
Tubing	5 ft brass	5 ft SS	5 ft brass	5 ft SS	2.5 ft brass	2.5 ft SS
Net buoyancy in water, 7 in. float [2]	60	60	70	70	—	—
Total weight of stops	3	3	6	6	—	—
Number of stops	2	2	4	4	—	—
Weight of 5 ft rod, included	18.5	16.9	18.5	16.9	—	—
Weight per ft of extra rod	—	—	—	—	3.7	3.4

[1] Additional tubing kits add on to the float accessory kits and include a connector. Maximum recommended tubing length for tapped-at-top float: 12.5 ft (3810 mm).

[2] Net buoyancy calculated with float 80% submerged, allowing for a 20% operating margin. Buoyancy data calculated for use in water. Contact the Sensor Competency Center for buoyancy data in media having specific gravity different than water (1.0).

When ordering float accessories, first specify the desired accessory kit, then as a second item, give the catalog number and the quantity of the additional tubing kits required. For example, for a 9049A6C kit with 15 ft of tubing, specify:

A. 9049A6C, quantity = 1 (includes 5 ft of tubing)

B. 9049T1, quantity = 4 (2.5 ft of tubing each, for a total of 10 additional ft)

Figure 18: Type AG1 Dimensions

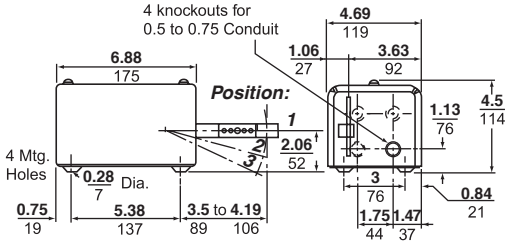

Figure 19: Type AR1/AW1 Dimensions

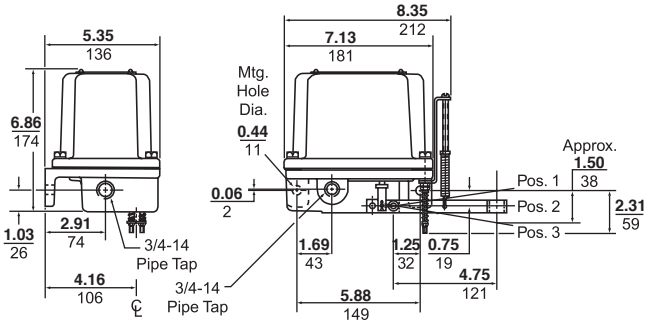

PUMPTROL™

© 2023 All rights Reserved

Class 9038 Type C Mechanical Alternators with Bushing

Table 24 contains ordering information for Class 9038 Type C mechanical alternators. Contact the Sensor Competency Center when using Class 9038 alternators in liquids with a different specific gravity than water (1.0).

When ordering a factory modification, add the Form number to the end of the alternator catalog number. For example, to select a 9038CG36 alternator with reverse action, select 9038CG36R.



9038CG36

Table 24: Class 9038 Type C Mechanical AlternatorsSpecifications

Specifications	
Application	Closed tanks using duplex, condensate pumps A 2.5 in. cast iron bushing attaches the float switch to the tank
Float movement	Transmitted through a nitrile rubber seal such as a Buna-N quad ring. Occasional seal replacement may be necessary.
Tank Pressure	Up to 50 psi
Ambient Temperature	–22 to +200 °F
Media Temperature (Minimum)	Solidification point of the medium in the tank, down to –22 °F
Contact Operation	Close on liquid rise (standard) Open on liquid rise (Form R)
Float Travel	Float travel is determined by the rod length. An external pointer indicates the float position. For more information on float travel and position, see “Float Travel” on page 61.
Materials (Standard)	#304 SS float, #316 SS rod, 2.5 in. cast iron bushing, brass sealing connector, Buna-N quad ring packing

Catalog Numbers							
Float Position [1]		**Left**			**Right**		
Water Level Change, Minimum–Maximum	**in. (mm)**	6.5–13 (165–330)	4–7.75 (102–197)	4.75–9.25 (121–235)	6.5–13 (165–330)	4–7.75 (102–197)	4.75–9.25 (121–235)
NEMA 1		**9038CG32**	**9038CG34**	**9038CG36**	**9038CG31**	**9038CG33**	**9038CG35**
NEMA 4		**9038CW32**	**9038CW34**	**9038CW36**	**9038CW31**	**9038CW33**	**9038CW35**
NEMA 7, 9		**9038CR32**	**9038CR34**	**9038CR36**	**9038CR31**	---	---

Modifications	Form
Omit 2.5 in. cast iron bushing	F3
Omit float	L
Two-level, non-alternating unit	N4 [2]
High water alarm circuit, single pole (Type CG only)	N5 [2]
High water alarm circuit, two pole (Type CG only)	N25 [2]
Reverse action: contacts open on liquid rise	R [2]
Fluorocarbon polymer such as Viton® packing, 5 oz float (diesel fuel, Type CG only)	Z19
Fluorocarbon polymer such as Viton packing, for media temperature up to 250 °F	Z20
Fluorocarbon polymer such as Viton packing, #316 SS float for liquid temperatures up to 250 °F	Z21

[1] Viewed from front of alternator, facing indicator scale.

[2] Factory installed only.

NOTE: For replacement floats, refer to page 55.

© 2023 All rights Reserved

Table 25 lists the float travel distances for the screw-in float switches. Refer to Figure 20.

Table 25: Type C Float Travel Adjustments, in. (mm)

R	A		B		C		D		F	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
4.25 (108) [1]	2 (51)	3.5 (89)	3.5 (89)	4.75 (121)	2.5 (64)	3.75 (95)	3.5 (89)	4.75 (121)	7 (178)	9.5 (241)
5 (127) [2]	2.25 (57)	3.75 (95)	4 (102)	5.25 (133)	2.75 (70)	3 (76)	4 (102)	5.25 (133)	8 (203)	10.5 (267)
7 (178) [3]	2.5 (64)	5 (127)	5 (127)	7 (178)	2 (51)	4 (102)	5 (152)	7 (178)	10 (254)	14 (495)

[1] CG33, CG34, CW33, CW34, CR33, CR34

[2] CG35, CG36, CW35, CW36, CR35, CR36

[3] CG31, CG32, CW31, CW32, CR31, CR32

Figure 20: Travel Dimensions



Figure 21: Type CG Dimensions

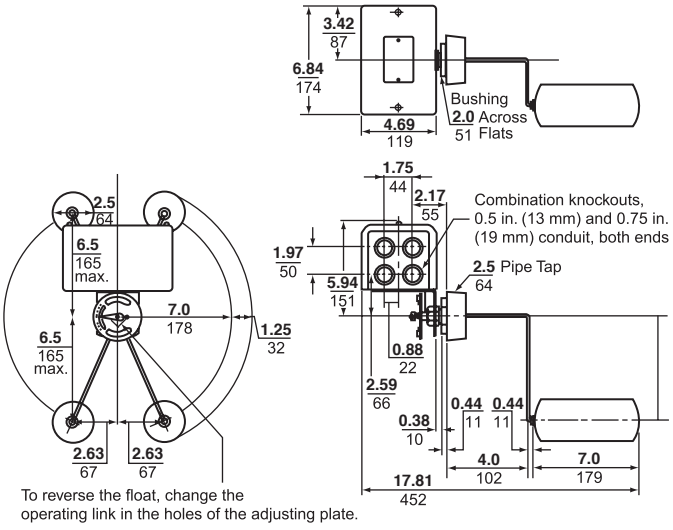

Figure 22: Type CR/CW Dimensions

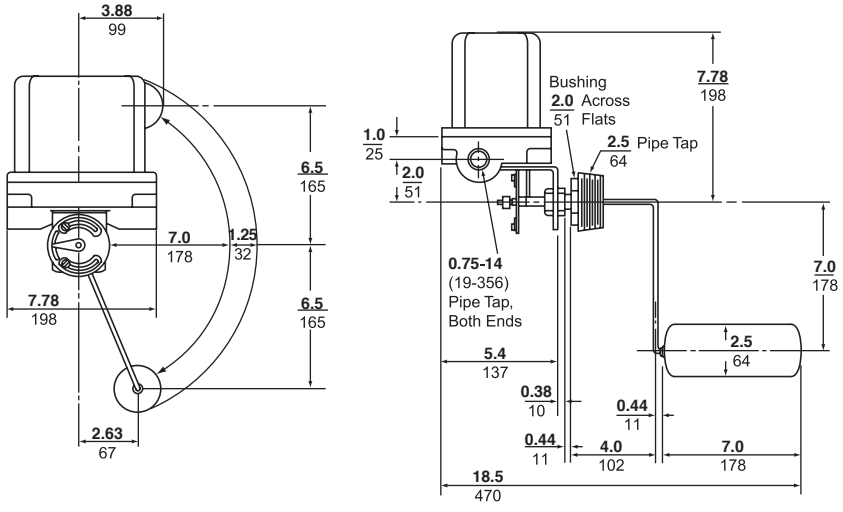

© 2023 All rights Reserved

9038DG
9049ER5
9049EF1

Class 9038 Type D Flange-Mounted Mechanical Alternators

Flange Mounted

Table 26 contains ordering information for Class 9038 Type D alternators, factory modifications, and float kits. Order rod and float accessory kits separately. Contact the Sensor Competency Center when using Class 9038 alternators in liquids with a different specific gravity than water (1.0).

When ordering a factory modification, add the Form number to the end of the alternator Type number. For example, to select a 9038DG7 alternator with manual transfer, order 9038DG7N3.

Table 26: Class 9038 Type D Mechanical Alternators

Specifications	
Application	Industrial closed tanks using duplex, condensate pumps Top mounted only
Float movement	Transmitted through a quad ring seal (occasional replacement may be necessary)
Tank Pressure	Up to 50 psi
Media Temperature	Viton® seal: up to 250 °F
Contact Operation	Close on liquid rise or open on liquid rise (field reversible)
Float Travel	Determined by the length of the hinge post and rod and by the float position For more information on float travel and position, see “Float Travel” on page 61 the following page.

Catalog Numbers				
Hinge Post Length (V) in. (mm)	**2.63 (67)**		**4.69 (119)**	
Water Level Change	**Minimum**	**Maximum**	**Minimum**	**Maximum**
NEMA 1	**9038DG7**	**9038DG8**	**9038DG9**	**9038DG10**
NEMA 4	**9038DW7**	**9038DW8**	**---**	**---**
NEMA 7, 9	**---**	**9038DR8**	**---**	**---**

Modifications **NOTE:** Factory installed only.	**Form**
Two-level, non-alternating unit	N4
High water alarm circuit (Type DG only)	N5

Float Kits			
Material	**Diameter in. (mm)**	**Length in. (mm)**	**Catalog Number**
#304 stainless steel	3.62 (92)	4.5 (114)	**9049EF1**
#316 stainless steel	3.62 (92)	4.5 (114)	**9049EF2**
NOTE: The following float kits are available but are not recommended for use with 9038D mechanical alternators. The float travel dimensions shown in this catalog for 9038D devices do not apply when using these floats. A correction factor appears in the footnote of Tables 27–30 on pages 61 and 63.			
#304 stainless steel	2.5 (64)	7 (178)	**9049HF3**
#316 stainless steel	2.5 (64)	7 (178)	**9049HF4**

© 2023 All rights Reserved

Class 9049 Rod Kits for Class 9038 Type D

Float Travel

Float travel is determined by the length of the hinge post and rod and by the float position. The float may be operated in three different positions. In Position 1, the contacts close when the liquid rises. In Position 2, the contacts open when the liquid rises. Use Table 27 to select the appropriate rod kit when ordering Class 9038 Types DG7, DW7, or DR7 alternators.

Table 27: Class 9049 Rod Kits for Class 9038 Type DG7, DW7, and DR7 Alternators

Float Travel for Class 9038 Types DG7, DW7, and DR7 Alternators Minimum Water Level Change (V = 2.63 in. / 67 mm)							
Catalog No.		**9049ER1**	**9049ER2**	**9049ER3**	**9049ER5**	**9049ER7**	**9049ER12**
Dimensions in. (mm)							
R		1.75 (44)	2.5 (64)	3.25 (83)	5.25 (133)	7.25 (184)	12.25 (311)
H [1]		8.25 (210)	9 (229)	9.5 (241)	11.75 (298)	13.75 (349)	18.75 (476)
A	**Min.**	0.75 (19)	0.63 (16)	0.5 (13)	0.13 (3)	0.25 (6)	0.38 (10)
	Max.	0.63 (16)	0.38 (10)	0.25 (6)	0.0 (0)	0.5 (13)	1.5 (38)
B	**Min.**	5 (127)	5.38 (137)	5.5 (140)	6.38 (162)	7 (178)	8.63 (219)
	Max.	5 (127)	5.25 (133)	5.5 (140)	6.25 (159)	7 (178)	8.75 (222)
C	**Min.**	4 (102)	4.25 (108)	4.38 (111)	5 (127)	5.5 (140)	6.75 (171)
	Max.	4.25 (108)	4.5 (114)	4.63 (118)	5.13 (130)	5.75 (146)	7.75 (197)
D	**Min.**	1.75 (44)	1.75 (44)	1.75 (44)	1.75 (44)	1.75 (44)	1.75 (44)
	Max.	1.5 (38)	1.38 (35)	1.25 (32)	1 (25)	0.88 (22)	0.63 (16)
F	**Min.**	6.75 (171)	7.13 (181)	7.25 (184)	8.13 (207)	8.75 (222)	10.38 (264)
	Max.	6.5 (165)	6.63 (168)	6.75 (171)	7.25 (184)	7.88 (200)	9.38 (238)
G	**Min.**	1 (25)	1 (25)	1 (25)	1 (25)	1 (25)	1 (25)
	Max.	1.5 (38)	1.5 (38)	1.5 (38)	1.75 (44)	2 (51)	2.5 (64)

[1] Add 2.5 in. (64 mm) to **H** when using HF3 or HF4 floats.

Figure 23: Travel Dimensions

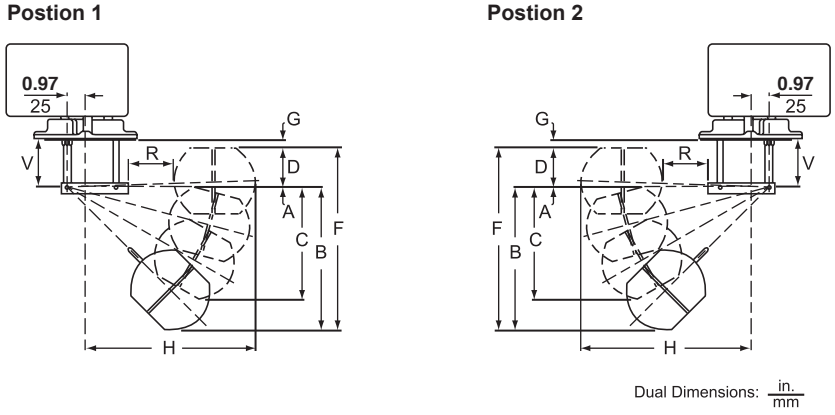

© 2023 All rights Reserved

Use the following table to select the appropriate rod kit when ordering Class 9038 Types DG8, DW8, or DR8 alternators.

Table 28: Class 9049 Rod Kits for Use on Class 9038 Types DG8, DW8, and DR8 Alternators

Float Travel for Class 9038 Types DG8, DW8, and DR8 Alternators Minimum Water Level Change (V = 2.63 in. / 67 mm)							
Catalog No.		**9049ER1**	**9049ER2**	**9049ER3**	**9049ER5**	**9049ER7**	**9049ER12**
Dimensions in. (mm)							
R		1.75 (44)	2.5 (64)	3.25 (83)	5.25 (133)	7.25 (184)	12.25 (311)
H [1]		7.5 (191)	8.25 (210)	9 (229)	11 (279)	13 (330)	18 (457)
A	**Min.**	0.0 (0)	0.5 (13)	1 (25)	2 (51)	3 (76)	5.5 (140)
	Max.	1.25 (32)	1.5 (38)	2 (51)	3 (76)	4 (102)	6.5 (165)
B	**Min**	8 (203)	8.75 (222)	9.5 (241)	11.5 (292)	13.5 (343)	18.5 (470)
C	**Min.**	6.5 (165)	7 (178)	7.75 (197)	9.5 (241)	11 (279)	14.75 (375)
	Max.	6.5 (165)	7 (178)	7.5 (1910	9 (229)	10.75 (273)	15 (381)
D [2]	**Min.**	2 (51)	1.75 (44)	1.5 (38)	1.25 (32)	0.75 (19)	0.5 (13)
	Max.	0.5 (13)	0.25 (6)	0.0 (0)	0.75 (19)	1.75 (44)	4.25 (108)
F	**Min.**	10 (254)	10.5 (267)	11 (279)	12.75 (324)	14.25 (362)	19 (483)
	Max.	8.5 (216)	9 (229)	9.5 (241)	10.75 (273)	11.75 (298)	14.25 (362)
G	**Min.**	1.5 (38)	1.5 (38)	1.75 (44)	2 (51)	2 (51)	2.25 (57)
	Max.	2.5 (64)	2.75 (70)	3 (76)	3.75 (95)	4.5 (114)	6.25 (159)

[1] Add 2.5 in. (64 mm) to H when using HF3 or HF4 floats.

[2] D is negative when the top of the float is below the horizontal centerline.

Use the following table to select the appropriate rod kit when ordering Class 9038 Types DG9, DW9, or DR9 alternators.

Table 29: Class 9049 Rod Kits for Class 9038 Type DG9, DW9, and DR9 Alternators

Float Travel for Class 9038 Types DG9, DW9, and DR9 Alternators Minimum Water Level Change (V = 4.69 in. / 119 mm)							
Catalog No.		**9049ER1**	**9049ER2**	**9049ER3**	**9049ER5**	**9049ER7**	**9049ER12**
Dimensions in. (mm)							
R		1.75 (44)	2.5 (64)	3.25 (83)	5.25 (133)	7.25 (184)	12.25 (311)
H [1]		8.25 (210)	9 (229)	9.5 (241)	11.75 (298)	13.75 (349)	18.75 (476)
A	**Min.**	1 (25)	1 (25)	0.88 (22)	0.63 (16)	0.25 (6)	0.13 (3)
	Max.	0.5 (13)	0.13 (3)	0.0 (0)	0.88 (22)	1.63 (41)	2.88 (73)
B	**Min.**	5.25 (133)	5.75 (146)	6 (152)	7.25 (184)	8.25 (210)	10.75 (273)
	Max.	5.25 (133)	5.63 (143)	5.88 (149)	7.13 (181)	8.25 (210)	11 (279)
C	**Min.**	4.5 (114)	4.75 (121)	5 (127)	5.75 (146)	6.5 (165)	8.38 (213)
	Max.	4.5 (114)	4.75 (121)	5 (127)	5.88 (149)	6.75 (171)	8.5 (216)
D	**Min.**	2 (51)	2 (51)	2 (51)	2 (51)	1.88 (48)	1.63 (41)
	Max.	1.5 (38)	1.25 (32)	1.13 (29)	0.75 (19)	0.5 (13)	0.5 (13)
F	**Min.**	7.25 (184)	7.75 (197)	8 (203)	9.25 (235)	10.13 (257)	12.38 (314)
	Max.	6.75 (171)	6.88 (175)	7 (178)	7.88 (200)	8.75 (222)	11.5 (292)
G	**Min.**	3 (76)	3 (76)	3 (76)	3 (76)	3.25 (83)	4 (102)
	Max.	3.75 (95)	4 (102)	4 (102)	4.38 (111)	4.63 (117)	5.75 (146)

[1] Add 2.5 in. (64 mm) to **H** when using HF3 or HF4 floats.

© 2023 All rights Reserved

Use the following table to select the appropriate rod kit when ordering Class 9038 Type DG10, DW10, or DR10 alternators.

Table 30: Class 9049 Rod Kits for Class 9038 Type DG10, DW10, and DR10 Alternators

Float Travel for Class 9038 Types DG10, DW10, and DR10 Alternators Minimum Water Level Change (V = 4.69 in. / 119 mm)							
Dimensions in. (mm)		**9049ER1**	**9049ER2**	**9049ER3**	**9049ER5**	**9049ER7**	**9049ER12**
R		1.75 (44)	2.5 (64)	3.25 (83)	5.25 (133)	7.25 (184)	12.25 (311)
H [1]		7.5 (191)	8.25 (210)	9 (229)	11 (279)	13 (330)	18 (457)
A	**Min.**	0.5 (13)	1 (25)	1.5 (38)	2.5 (64)	3.25 (83)	6 (152)
	Max.	1.5 (38)	2 (51)	2.5 (64)	4 (102)	5.5 (140)	9.25 (235)
B	**Min**	8 (203)	8.75 (222)	9.5 (241)	11.5 (292)	13.5 (343)	18.5 (470)
C	**Min.**	7 (178)	7.75 (194)	8.25 (210)	10 (254)	11.5 (292)	15.5 (394)
	Max.	7 (178)	7.5 (191)	8.25 (210)	10 (254)	12 (305)	17 (432)
D [2]	**Min.**	1.75 (44)	1.75 (44)	1.5 (38)	1.25 (32)	1 (25)	0.5 (13)
	Max.	0.5 (13)	0.25 (6)	0.0 (0)	1 (25)	1.5 (38)	2.75 (70)
F	**Min.**	8.75 (222)	10.5 (267)	11 (279)	12.75 (324)	14.5 (368)	19 (483)
	Max.	8.5 (216)	9 (229)	9.5 (241)	10.5 (267)	12 (305)	15.75 (400)
G	**Min.**	3.25 (83)	3.5 (89)	3.5 (89)	3.75 (95)	4 (102)	4.75 (121)
	Max.	4.75 (121)	5 (127)	5.25 (133)	6 (152)	6.75 (171)	8.5 (216)

[1] Add 2.5 in. (64 mm) to H when using HF3 or HF4 floats.

[2] D is negative when the top of the float is below the horizontal centerline.

Figure 24: Type DG Dimensions

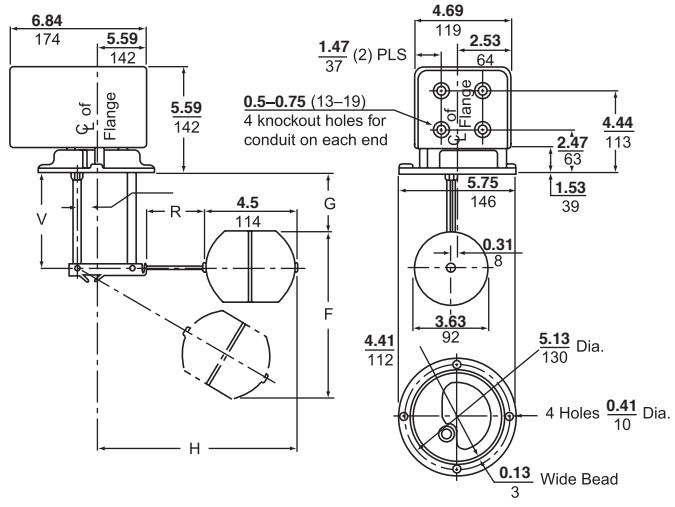

Note: The recommended size of hole in the tank for the entry of the float and mounting of the control is 4.19 (106).
Floats shown are Type EF, 4.5 (114) long.
Add 2.5 (64) to H if using Type HF Floats, which are 7.0 (178) long.

Figure 25: Type DR/DW Dimensions

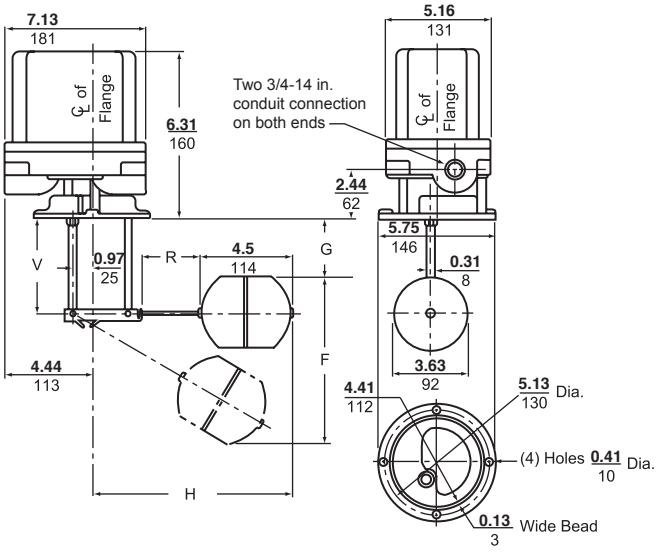

© 2023 All rights Reserved

Class 9049 Accessories and Class 9998 Renewal Parts Kits

Table 31: Class 9049 Accessories

Catalog Number	Description	Equipment To Be Serviced
9049A6	7 in. Tapped at Top #304 Stainless Steel Float, 5 ft Brass Rod, 2 Stops	All 9036, 9038A
9049A6C	7 in. Center Hole #304 Stainless Steel Float, 5 ft Brass Rod, 4 Stops	All 9036, 9038A
9049A6CS	7 in. Center Hole #316 Stainless Steel Float, 5 ft Stainless Steel Rod, 4 Stainless Steel Stops	All 9036, 9038A
9049A6S	7 in. Tapped at Top #316 Stainless Steel Float, 5 ft Stainless Steel Rod, 2 Stainless Steel Stops	All 9036, 9038A
9049A13	Compensating Spring	9036GG
9049A54	Mounting Bracket—Replacing Obsolete 9036A with 9036G	9036GG
9049A55	Mounting Bracket—Replacing 9036A (S or F1) with 9036G	9036GG
9049A58	Form R Lever	9036DG
9049EF1	#304 Stainless Steel Float (do not remove ballast)	9037E, 9038D
9049EF2	#316 Stainless Steel Float (do not remove ballast)	9037E, 9038D
9049ER1	1-3/4 in. Stainless Steel Rod	9037E, 9038D
9049ER2	2-1/2 in. Stainless Steel Rod	9037E, 9038D
9049ER3	3-1/4 in. Stainless Steel Rod	9037E, 9038D
9049ER5	5-1/4 in. Stainless Steel Rod	9037E, 9038D
9049ER7	7-1/4 in. Stainless Steel Rod	9037E, 9038D
9049ER12	12-1/4 in. Stainless Steel Rod	9037E, 9038D
9049GF1	#304 Stainless Steel Float (do not remove ballast)	9037G
9049HF3	#304 Stainless Steel Float (do not remove ballast)	9037H, 9038C, D [1]
9049HF4	#316 Stainless Steel Float (do not remove ballast)	9037H, 9038C, D [1]
9049T1	Additional Rod Kit: One 2-1/2 ft Section of Brass Rod, Connector	9049A6, A6C
9049T1S	Additional Rod Kit: One 2-1/2 ft Section of Stainless Steel Rod, Connector	9049A6S, A6CS
9049UMS1	Universal Mounting Bracket	All 9036; 9038AG, AR, AW

[1] Not recommended for 9038D mechanical alternators. 9049EF1 (#304 SS) and 9049EF2 (#316 SS) are recommended instead.

Renewal parts are generally available for Pump Control products with a current date code or with a numerical date code (such as 172, which corresponds to the first quarter of 1972). Parts are no longer available for devices manufactured before 1965.

© 2023 All rights Reserved

Références, ordre alphabétique

9013FHG2 30
9013FHG3 30
9013FHG4 30, 32
9013FHG9 30
9013FHG12 30
9013FHG13 30
9013FHG14 31
9013FHG19 31
9013FHG22 30
9013FHG24 30
9013FHG29 30
9013FHG32 30
9013FHG33 30
9013FHG34 31
9013FHG39 31
9013FHG42 31
9013FHG44 31
9013FHG49 31
9013FHG52 31
9013FHG54 31
9013FHG59 31
9013FRG2 27
9013FRG9 27
9013FRG12 27
9013FRG22 27
9013FRG23 27
9013FRG29 28
9013FRG32 27
9013FRG33 27
9013FRG58 28
9013FRG62 29
9013FRG63 29
9013FRG72 29
9013FRG73 29
9013FRG89 29
9013FRG92 29
9013FRG93 29
9013FSG2 23
9013FSG9 23, 24
9013FSG10 23
9013FSG20 23
9013FSG22 24
9013FSG29 24
9013FSG42 24
9013FSG49 24
9013FSG52 24
9013FSW2 23
9013FSW29 24
9013FTG2 25
9013FTW2 25
9013FYG 4, 32
9013FYG2 26
9013FYW2 26
9013GHB2 34
9013GHG1 35
9013GHG2 35
9013GHG3 35
9013GHG5 36
9013GHG6 37
9013GHR1 35
9013GHR2 35
9013GHR4 37
9013GHW2 36
9013GHW5 37
9013GMG2 33
9013GSB2 33
9013GSG2 33
9013GSG3 33
9013GSR2 34
9013GSW2 34

9036DG2 44
9036DG2R 44
9036DR31 44
9036DR31R 44
9036DW31 44
9036DW31R 44
9036FG30 47
9036GG2 44
9036GG2R 44
9036GR1 44
9036GW1 44
9036GW1R 44

9037EG8 48
9037EG8R1F1 48
9037EG9 48
9037EG10 48
9037EG13 48
9037ER9 48
9037EW9 48
9037EW13 48
9037HG30 52
9037HG31 52
9037HG32 52
9037HG33 52
9037HG34 52
9037HG35 52
9037HG36 52
9037HG37 52
9037HG38 52
9037HG39 52
9037HW30 52
9037HW31 52
9037HW32 52
9037HW33 52
9037HW34 52
9037HW35 52
9037HW36 52
9037HW37 52

9038AG1 54, 55
9038AG1R 55
9038AR1 54, 55
9038AR1R 55
9038AW1 54, 55
9038AW1R 55
9038CG31 56
9038CG32 56
9038CG33 56
9038CG34 56
9038CG35 56
9038CG36 56
9038CR31 56
9038CR32 56
9038CR34 56
9038CR36 56
9038CW31 56
9038CW32 56
9038CW33 56
9038CW34 56
9038CW35 56
9038CW36 56
9038DG7 58
9038DG8 58
9038DG9 58
9038DG10 58
9038DR8 58
9038DW7 58
9038DW8 58

9049A6 8, 45, 55, 62
9049A6C 8, 45, 55, 62
9049A6CS 8, 45, 55, 62
9049A6S 8, 45, 55, 62
9049A13 44, 62
9049A54 62
9049A55 62
9049A58 44, 62
9049A60 9, 47
9049A61 9, 47
9049EF1 15, 48, 58, 62
9049EF2 15, 48, 58, 62
9049ER1 15, 48, 50, 51, 59, 60, 61, 62
9049ER2 15, 48, 50, 51, 59, 60, 61, 62
9049ER3 15, 48, 50, 51, 59, 60, 61, 62
9049ER5 15, 48, 50, 51, 59, 60, 61, 62
9049ER7 15, 48, 50, 51, 59, 60, 61, 62
9049ER12 15, 48, 50, 51, 59, 60, 61, 62
9049GF1 62
9049HF3 15, 48, 58, 62
9049HF4 15, 48, 58, 62
9049T1 8, 45, 55, 62
9049T1S 8, 45, 55, 62
9049UMS1 9, 62

PUMPTROL™

© 2023 All rights Reserved

Notes

© 2023 All rights Reserved

Notes

© 2023 All rights Reserved

Notes

© 2023 All rights Reserved

www.tesensors.com

The information provided in this catalogue contains description of products sold by TMSS France, its subsidiaries and other affiliated companies (“Offer”) with technical specifications and technical characteristics of the performance of the corresponding Offer.

The content of this document is subject to revision at any time without notice due to continued progress in methodology, design and manufacturing.

To the extent permitted by applicable law, no responsibility or liability is assumed by TMSS France, its subsidiaries and other affiliated companies for any type of damage arising out of or in connexion with (a) informational content of this catalogue not conforming with or exceeding the technical specifications, or (b) any error contained in this catalogue, or (c) any use, decision, act or omission made or taken on the basis of or in reliance on any information contained or referred to in this catalogue.

NEITHER TMSS FRANCE, ITS SUBSIDIARIES, NOR ITS OTHER AFFILIATES, AS THE CASE MAYBE, MAKE NO WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO WHETHER THIS CATALOGUE OR ANY INFORMATION CONTAINED THEREIN SUCH AS PRODUCTS WILL MEET REQUIREMENTS, EXPECTATIONS OR PURPOSE OF ANY PERSON MAKING USE THEREOF.

TelemecaniqueTM Sensors is a trademark of Schneider Electric Industries SAS used under license by TMSS France. Any other brands or trademarks referred to in this catalogue are property of TMSS France or, as the case may be, of its subsidiaries or other affiliated companies. All other brands are trademarks of their respective owners.
This catalogue and its content are protected under applicable copyright laws and provided for informative use only.
No part of this catalogue may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of TMSS France. Copyright, intellectual, and all other proprietary rights in the content of this catalogue (including but not limited to audio, video, text, and photographs) rests with TMSS France, its subsidiaries, and other affiliated companies or its licensors. All rights in such content not expressly granted herein are reserved. No rights of any kind are licensed or assigned or shall otherwise pass to persons accessing this information.

As standards, specifications and design change from time to time, please ask for confirmation of the information given in this publication.

©2023, TMSS France, All Rights Reserved.

TMSS France
Head Office
35 rue Joseph Monier
F-92500 Rueil-Malmaison – France

TES ELECTRIC US, LLC
1875 Founders Dr.
Kettering, OH 45420 - United States of America
customer-support-NA@tesensors.com
(833)-737-1405

September 2023 - V1.1

TESEBRO000022EN