

VAPORPROOF FIXTURE

APPLICATIONS: Ceiling, Wall & Pendant mount, can be used in wet locations.

STANDARD MATERIAL: Rugged Die Cast Copper Free Aluminum


STANDARD FINISH: Grey Powder coat finish for maximum durability

FEATURES: All assembled fixtures are equipped with 5 Holes and available with 1/2" & 3/4" threaded holes. Socket with leads. Heat resistant glass globe. Prevents moisture entry. Industrial grade, fully gasketed. Designed to protect the interior from deteriorating effect of ice, corrosive fumes, and non-explosive vapors.



PART#	A	B
VFI100W50	5.25	8.5
VFI100W75	5.25	8.5
VFI100W50CG	5.25	9.0
VFI100W75CG	5.25	9.0
VFI200W50CG	5.25	11.5
VFI200W75CG	5.25	11.5
VFIBOX50	5.25	3.5
VFIBOX75	5.25	3.5

Part No.	UPC	# of Holes	Thread Size	Ship Case	Wt/ Case
VFI100W50	83868	5	1/2"	6	13
VFI100W75	83869	5	3/4"	6	13
VFI100W50CG	85156	5	1/2"	6	16
VFI100W75CG	85157	5	3/4"	6	16
VFI200W50CG	85561	5	1/2"	6	16
VFI200W75CG	85562	5	3/4"	6	16
VFIBOX50	83872	5	1/2"	12	13
VFIBOX75	83871	5	3/4"	12	13




UL Listing: Suitable for wet locations for use in dwellings. Suitable for use with 90° C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, non-explosive vapors and gases. Approved for maximum 100W incandescent.

VICTOR SPLIT KNOB

STANDARD MATERIAL: Glazed Porcelain

APPLICATIONS: For running Temporary Lighting

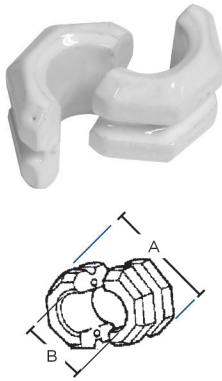

PART #	A	B
V22	2.125	1.00
V38	3.00	1.50

Part No.	UPC	Description	Unit Ctn	Ship Case	Wt/ Case
T124	33517	Pigtail Socket - 6" Long	25	250	32
T124L	85697	Pigtail Socket - 6" Long Left Hand	25	250	32
V22	33515	Victor Split Knob - 1"	-	100	38
V38	33516	Victor Split Knob - 1-1/2"	-	50	104

PIGTAIL SOCKET

STANDARD MATERIAL: Rubber

FEATURES: Right Handed Thread, Left Handed Thread, #14 Stranded, 60/600V

APPLICATIONS: Medium Base for use in electrical equipment, harnesses, light strings and related applications. Wire leads are color-coded stranded wire, stripped at the ends for easy connection. Rubber sockets have an extended lip to seal against bulb. Metal shell interiors are aluminum, #145 nickel-plated copper. T124L for use with left hand bulbs.



TEMPORARY LIGHTING SOLUTIONS



99% FILL RATE | NEXT DAY DELIVERY

WWW.TOPAZ-USA.COM • 800-666-2852 • FAX: 631-758-8026




400 WATT HIGH BAY WORK LIGHT

APPLICATIONS:

For use in “High Bay” applications only. Topaz Electric defines High Bay applications greater than 25 feet from the floor.

FEATURES:

Labor saving unit comes fully assembled.
Muliti-Tap ballast: 120V, 208V, 240V, 277V (Factory wired 120V)
400W, clear MH pulse start lamp included. Corrosion resistant welded steel safety cage included. Replacement cages can also be purchased separately. Meets OSHA requirements for minimum illumination of work areas when properly installed.

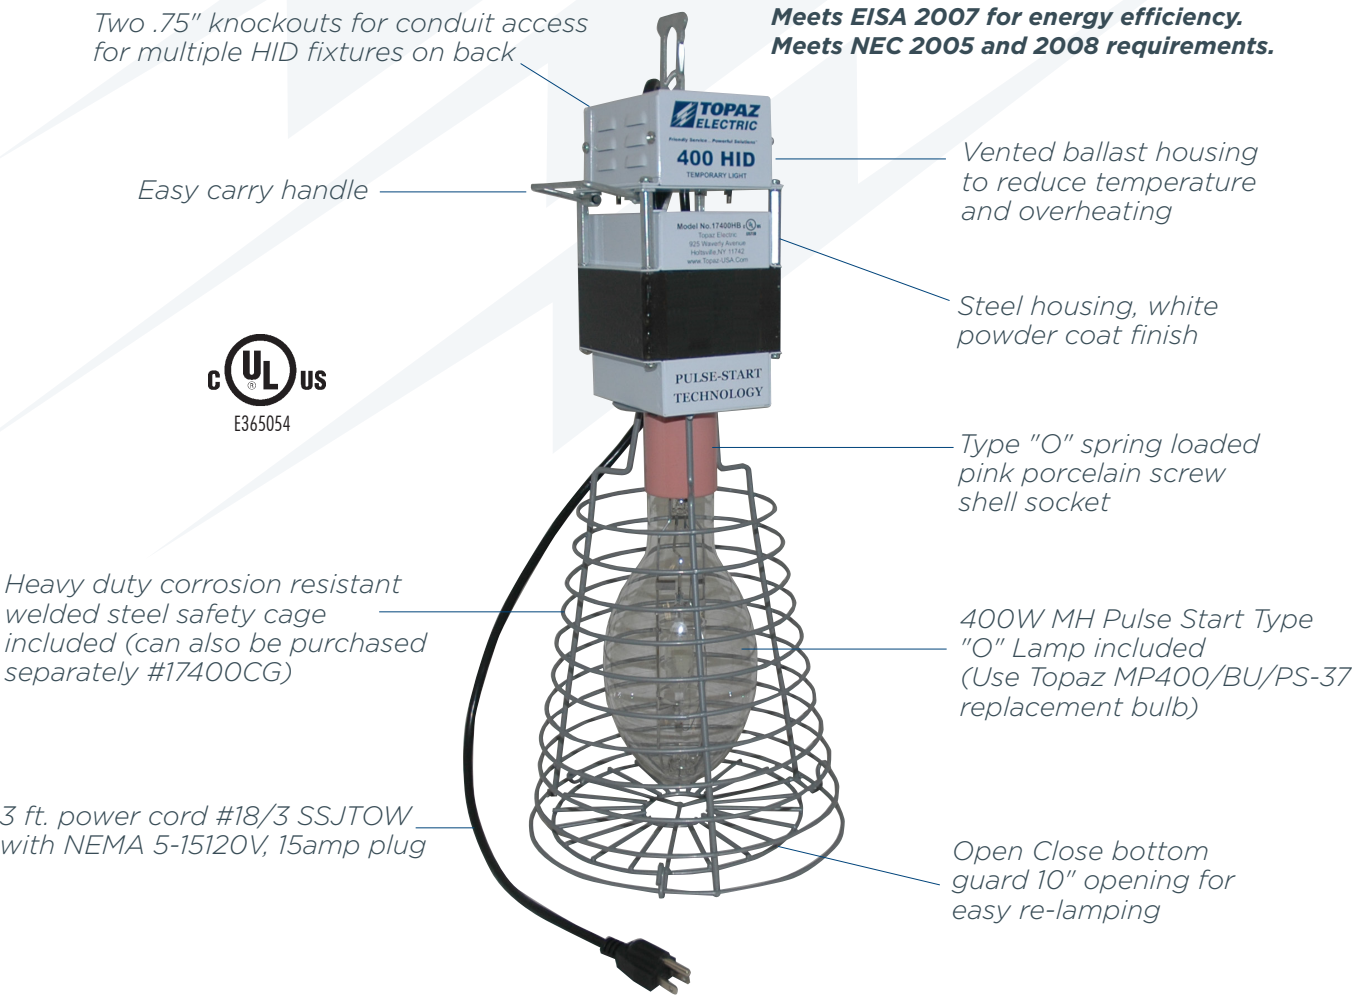

Part No.	UPC	Description	Ship Case	Weight Case
17400HB	86898	400 Watt Temporary High Bay Fixture	1	24
17400CG	85197	Replacement Safety Cage 10" Opening	6	17


TEMPORARY LIGHTING

APPLICATIONS:

Can be used on Jobsites, Parking Lots, Nursery's & other locations requiring a temporary light source.

FEATURES:

OSHA Compliant and UL Listed, NEC Approved.

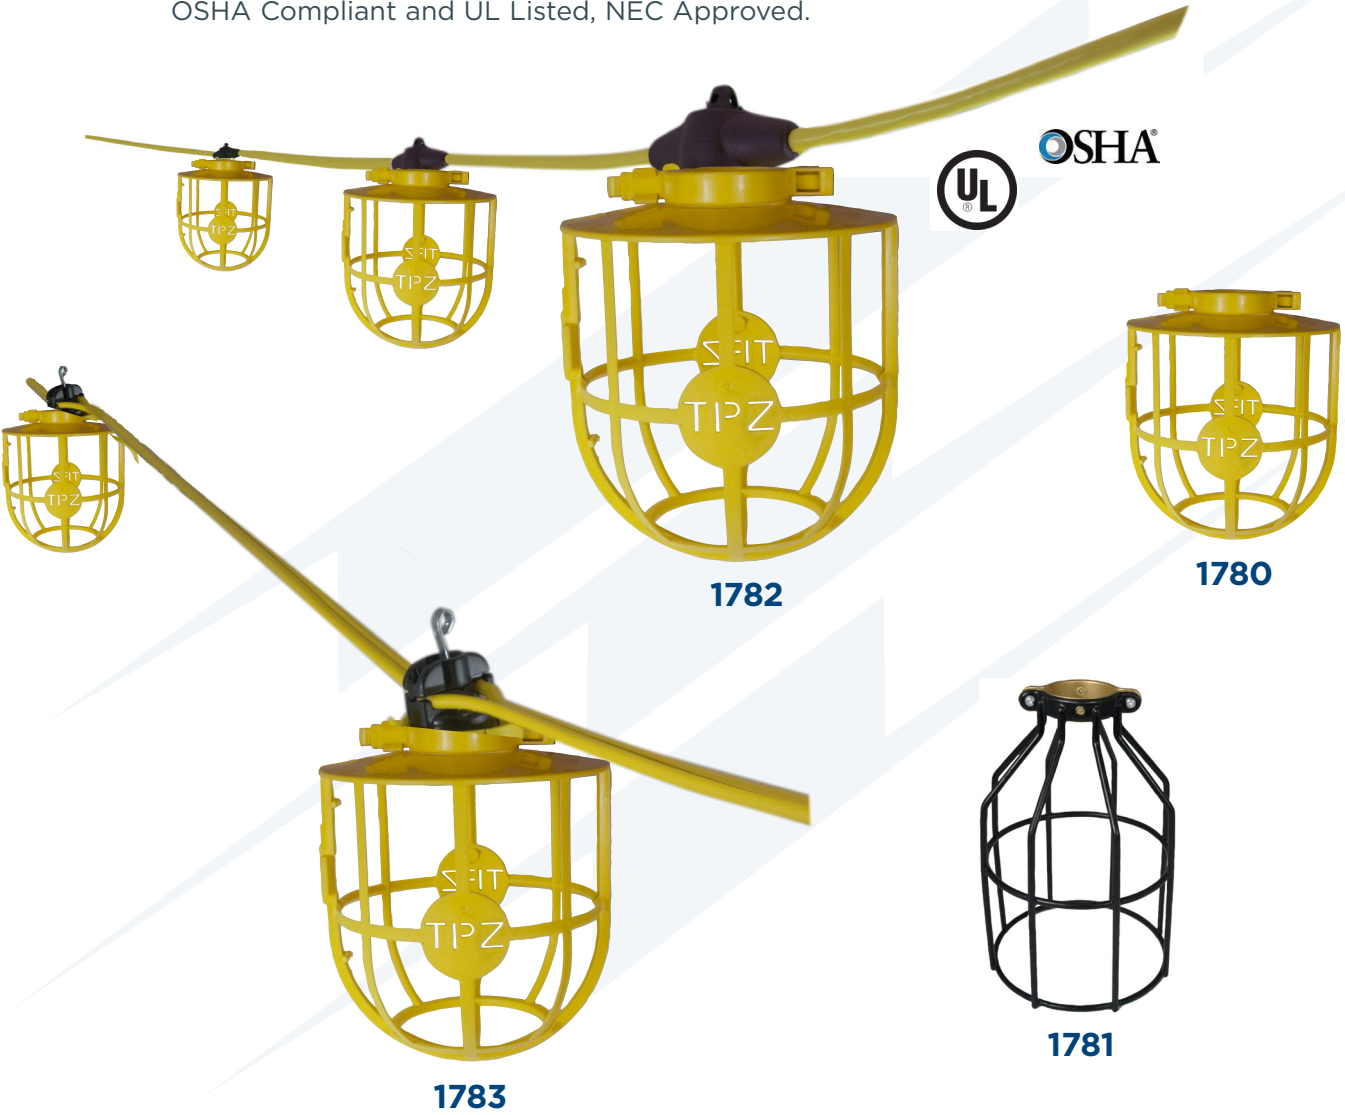

Part No.	UPC	Description	Ship Case	Weight Case
1780	84008	Yellow Plastic Birdcage	100	15
1781	84009	Metal Replacement Cage	10	11
1782	84010	Temp Lighting Molded Cord. Size: 14-2	100 Ft.	11
1783	84010	Temp Lighting Flat Wire Pin Type. Size: 14-2	100 Ft.	10