


Snap-In MC Cable Connectors

Set Screw Type with Insulated Throat

Features

- No locknut required
- Single-unit or duplex construction with captive clamp
- Applicable third party standards - UL Standards: 514B Fed. Spec. W-F-406E

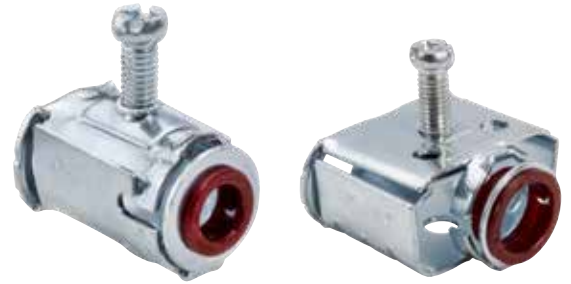

Applications

- Use to join sheathed cable into outlet boxes or enclosures

Standard Material


- Steel

Standard Finish

- Zinc plated

Applicable Third Party Standards

- UL Standard: UL 514B
- Fed. Spec: W-F-406E



Catalog Number	UPC	KO	Unit Carton	Ship Case	Weight/Case	Inches		
						A	B	C
AMC1	33770	1/2"	50	500	38	1.39	.844	.846
AMC2	33771	3/4"	25	250	48	1.63	1.88	.522
AMC12*	33772	1/2"	25	250	14	1.52	.916	.868

*Accepts 2 cables of each size listed.

UL Listed Compatible Cables

Catalog Number	KO Size	Size	Cable type	Cable Size	Opening MAX.	Opening MIN.	Wire Bundle Diameter MIN.	Wire Bundle Diameter MAX.
AMC1	1/2"	MC-38S	AC Steel	14-2 – 10-3	0.565	0.475	0.210	0.330
			AC STEEL HCF	14-2 – 10-3	0.565	0.475	0.220	0.360
			AC ALUMINUM	14-2 – 10-3	0.610	0.464	0.210	0.330
			AC ALUM HCF	14-2 – 10-3	0.610	0.464	0.220	0.360
			MCI STEEL	14-2 – 10-3	0.565	0.455	0.220	0.360
			MCI ALUMINUM	14-2 – 10-3	0.600	0.455	0.220	0.360
			MCI-A	14-2 – 10-3	0.510	0.385	0.220	0.345
			MCI-A HCF	14-2 – 10-3	0.510	0.385	0.240	0.430
			MC-PCS Steel	12/2 - 12/3	0.610	0.529	0.360	0.380
			MC-PCS ALUMINUM	12/2 - 12/3	0.610	0.529	0.360	0.380
			Flex Conduit	3/8"	0.610	0.560	---	---
AMC2	3/4"	MC-75S	AC Steel	10-3 – 6-3	0.850	0.545	0.330	0.500
			AC STEEL HCF	10-3 – 6-3	0.850	0.545	0.360	0.550
			AC ALUMINUM	10-3 – 6-3	0.835	0.600	0.330	0.500
			AC ALUM HCF	10-3 – 6-3	0.835	0.600	0.360	0.550
			MCI STEEL	10-3 – 6-3	0.850	0.550	0.360	0.550
			MCI ALUMINUM	10-3 – 6-3	0.850	0.580	0.360	0.550
			MCI-A	8-3 - 6-3	0.785	0.675	0.460	0.570
			MCI-A HCF	8-3 - 6-3	0.785	0.675	0.510	0.620
			MC-PCS Steel	8-3 - 6-3	0.679	0.529	0.510	0.620
			MC-PCS ALUMINUM	8-3 - 6-3	0.679	0.529	0.510	0.620
			Flex Conduit	1/2"	0.920	0.860	---	---
AMC12	1/2"	DMC-38S	AC Steel	14-2 – 10-3	0.565	0.475	0.210	0.330
			AC STEEL HCF	14-2 – 10-3	0.565	0.475	0.220	0.360
			AC ALUMINUM	14-2 – 10-3	0.610	0.464	0.210	0.330
			AC ALUM HCF	14-2 – 10-3	0.610	0.464	0.220	0.360
			MCI STEEL	14-2 – 10-3	0.565	0.455	0.220	0.360
			MCI ALUMINUM	14-2 – 10-3	0.600	0.455	0.220	0.360
			MCI-A	14-2 – 10-3	0.510	0.385	0.220	0.345
			MCI-A HCF	14-2 – 10-3	0.510	0.385	0.240	0.430
			MC-PCS Steel	12/2 - 12/3	0.610	0.529	0.360	0.380
			MC-PCS ALUMINUM	12/2 - 12/3	0.610	0.529	0.360	0.380
			Flex Conduit	3/8"	0.610	0.560	---	---