

Rigid Conduit Bodies

C Type - Form 7

Features

- NPT tapered hubs
- NEMA FB 1/NEMA 3R raintight when installed with cover and gasket
- Suitable for Class 1 Div.2 hazardous locations when installed according to NEC 2014 501.10(B)(4)

Applications

- Serves as pull outlet for conductors being installed

Standard Material

- Gray iron


Standard Finish

- Zinc plated
- Eco-friendly finish with superior corrosion resistant coating
- ASTM B117 (200+ HR NaCL spray test)
- Highly resistant to solvents, fuels and acids



E195124

UL 514A and UL 514B
Fed. Spec A-A-50563
NEMA FB 1

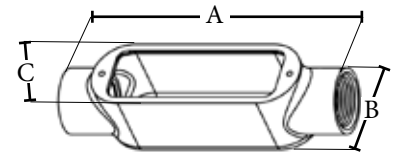

Catalog Number	UPC	Size	Wire Size		Internal Volume (in ³)	Ship Case	Weight/Case	Inches		
			Max. Number	Max. Size				A	B	C
C1G7	86915	1/2"	---	---	3.8	10	8	5.30	1.50	1.40
C2G7	86916	3/4"	3	6 AWG	5.8	10	12	6.20	1.70	1.70
C3G7	86917	1"	3	4 AWG	9	5	9	7.30	1.80	1.90
C4G7	86918	1-1/4"	3	2 AWG	17.8	10	27	7.40	2.20	2.30
C5G7	86919	1-1/2"	3	2 AWG	24	10	33	8.20	2.40	2.60
C6G7	86920	2"	3	1/0 AWG	45	5	25	9.10	3	3.10
C7G7	86921	2-1/2"	3	2/0 AWG	95.8	1	10	12.40	4.30	3.70
C8G7	86922	3"	3	2/0 AWG	119	1	13	12.40	4.30	4.40