

Rigid Conduit Bodies

Threaded T Type - Malleable Iron

Features

- NPT tapered hubs
- Suitable for use in concrete

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material


- Malleable iron

Standard Finish

- Zinc plated, aluminum enameled

Applicable Third Party Standards

- UL Standard: UL 514A
- Fed. Spec: W-C-586D
- NEMA: FB 1

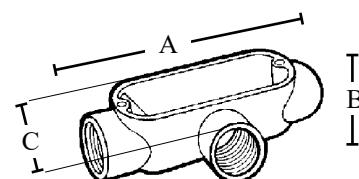

Catalog Number	UPC	Size	Max. Number	Max. Size	Internal Volume (in ³)	Ship Case	Weight/Case	A	Inches B	C
T1M	21830	1/2"	---	---	6	10	8	5.35	1.31	2.02
T2M	21840	3/4"	3	6 AWG	9.5	10	12	6	1.62	2.22
T3M	21850	1"	3	4 AWG	15	5	9	7.06	1.88	2.56
T4M	21860	1-1/4"	3	2 AWG	33	5	16	7.25	2.50	3.50
T5M	21870	1-1/2"	3	1 AWG	36	2	7	9.25	2.67	3.50
T6M	21880	2"	3	2/O AWG	75	1	16	11.50	3.29	4.25
T7M	21890	2-1/2"	3	4/O AWG	138	1	12	15	3.9375	5.718
T8M	21900	3"	3	4/O AWG	170	1	15	15.125	4.75	8.875
T9M	21910	3-1/2"	3	350 MCM	300	1	23	18.125	5.2031	6.812
T10M	21920	4"	3	350 MCM	328	1	24	18.125	5.5625	7.203