

## EP Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

### FEATURES

#### EP Bowl

- DYNAMAX TORNADO FLUSH® system, high efficiency (1.28 GPF/0.9 GPF)
- CEFIONTECT® ceramic glaze - prevents debris, mold from sticking to ceramic surfaces
- Universal Height
- Elongated front bowl

#### DuoFit In-Wall Tank

- Dual flushing system, high-efficiency (1.28 GPF/4.8 LPF & 0.9 GPF/3.4 LPF) Avg. flush 1.03 GPF
- Adjustable 15"-19" mounting height
- Saves up to 9" of floor space compared to standard floor-mounted toilet
- Supports up to 880lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper supply line

#### Push Plate

- YT930  
Basic Round Push Plate  
#WH White Matte or #MS Matte Silver

### KIT COMPONENTS

- CT428CFG#01  
EP Wall-Hung Toilet
- WT172M#01  
In-Wall Tank System (Copper Pipe)
- YT930  
Basic Round Push Plate  
#WH White Matte or #MS Matte Silver

#### Available Options

- YT920#WH - White Matte Basic Square Push Plate
- YT920#MS - Matte Silver Basic Square Push Plate
- YT970#SS - Stainless Steel Wall Square Push Plate
- YT980#SS - Stainless Steel Wall Round Push Plate
- SS114 - SoftClose Seat

### COLORS/FINISHES

- Standard  
#01 Cotton



**D+** DYNAMAX  
TORNADO FLUSH

**SD** Skirted Design

**CE** CEFIONTECT

### CODES/STANDARDS

- Meets or exceeds:
  - Bowl: ASME A112.19.2/CSA B45.1, ASME A112.19.14
  - Carrier System: ASME A112.6.2
  - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC), EPA WaterSense State of Massachusetts, City of Los Angeles and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



# CWT428CMFG

## EP Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

### PRODUCT SPECIFICATIONS

|                            | CT428CFG                                  | WT172M                                    |
|----------------------------|---|---|
| <b>Water Use</b>           | 1.28 GPF & 0.9 GPF<br>(4.8 LPF & 3.4 LPF) | 1.28 GPF & 0.9 GPF<br>(4.8 LPF & 3.4 LPF) |
| <b>Flush System</b>        | DYNAMAX TORNADO FLUSH®                    | Dual flushing                             |
| <b>Min. Water Pressure</b> | 8 psi (static)                            | 8 psi (static)                            |
| <b>Water Surface</b>       | 5-1/2" X 4-1/8"                           |   |
| <b>Trap Diameter</b>       | 2-1/8"                                    |   |
| <b>Installation Height</b> | 15" to 19"                                | 15" to 19"                                |
| <b>Trap Seal</b>           | 2-1/8"                                    |   |
| <b>Warranty</b>            | One Year Limited Warranty                 | One Year Limited Warranty                 |
| <b>Material</b>            | Vitreous China                            | Various                                   |
| <b>Shipping Weight</b>     | 68 lbs                                    | 38 lbs                                    |
| <b>Shipping Dimensions</b> | 22" L x 14.6" W x 16.5 H                  | 48" L x 26-1/2" W x 6" H                  |

#### CT428CFG


This universal height, high efficiency DYNAMAX TORNADO flushing system toilet shall be 1.28 GPF & 0.9 GPF. Toilet shall have CEFIONTECT® ceramic glaze. Toilet shall be mounted to in-wall tank system, elongated front bowl and wall-mounted push-button type trip lever. Toilet shall be TOTO Model CT428CFG.

#### WT172M



This universal height, high-efficiency, dual flushing, in-wall tank system toilet shall be 1.28 GPF & 0.9 GPF. Requires TOTO toilet model CT428CFG. In-Wall tank system shall be TOTO Model WT172M.

### PRODUCT DIMENSIONS

#### CT428CFG

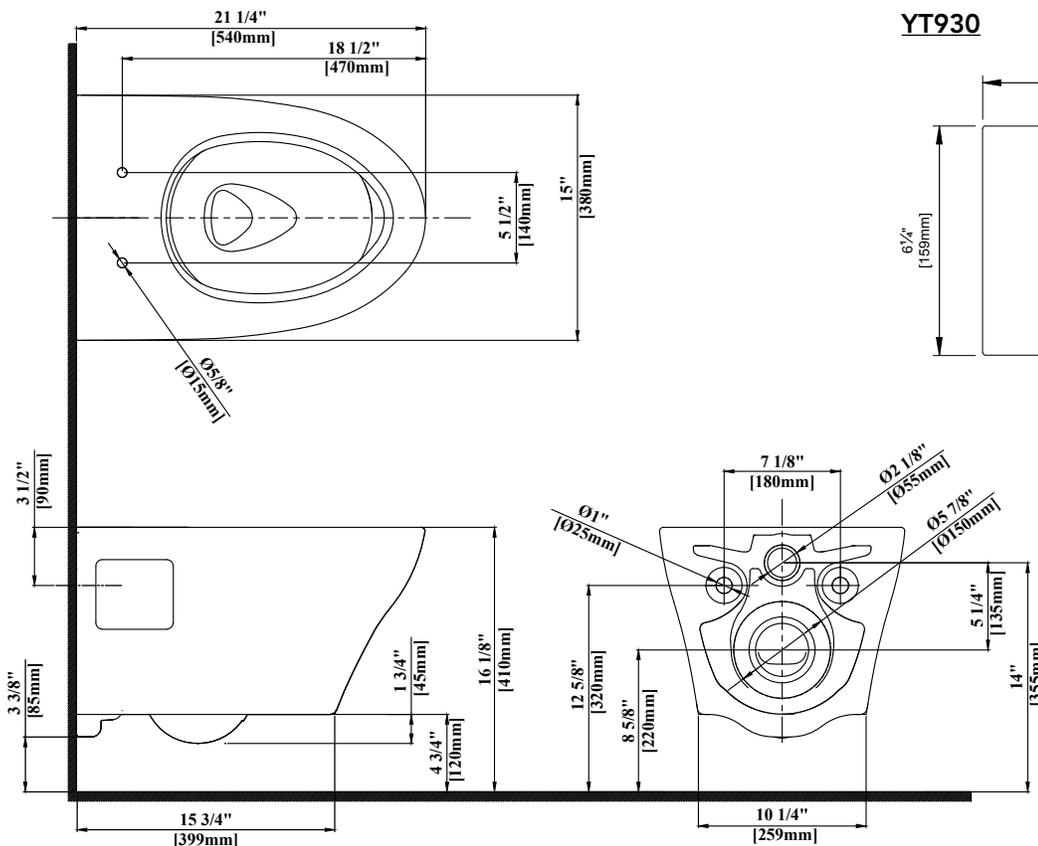


#### YT930

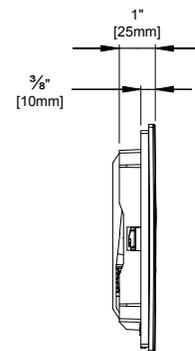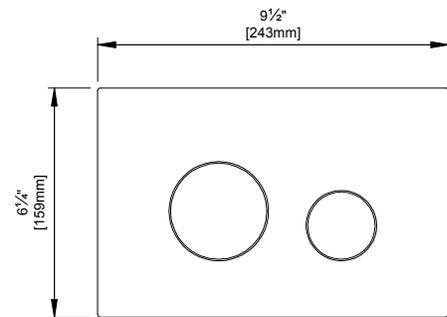

# CWT428CMFG


## EP Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

### INSTALLATION NOTES

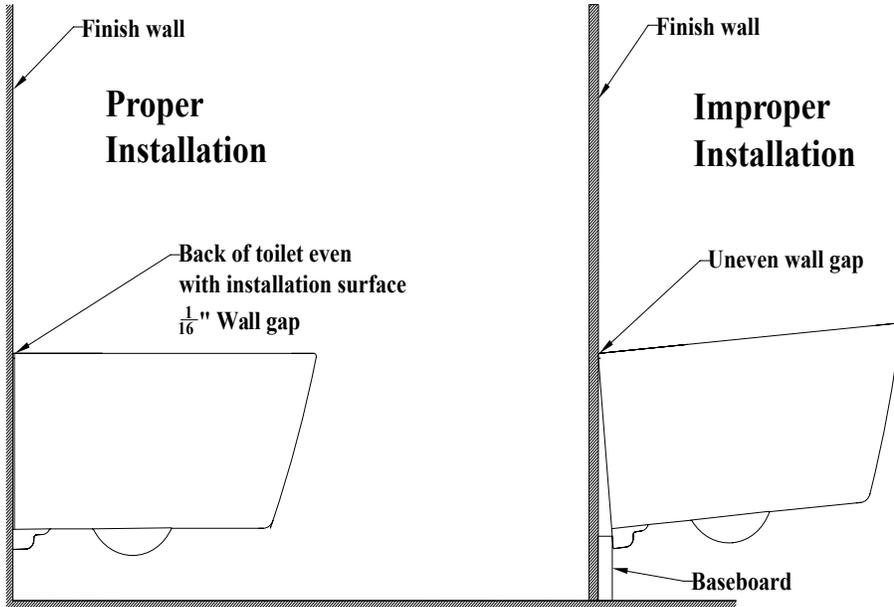

### DIMENSIONS

#### WT172M

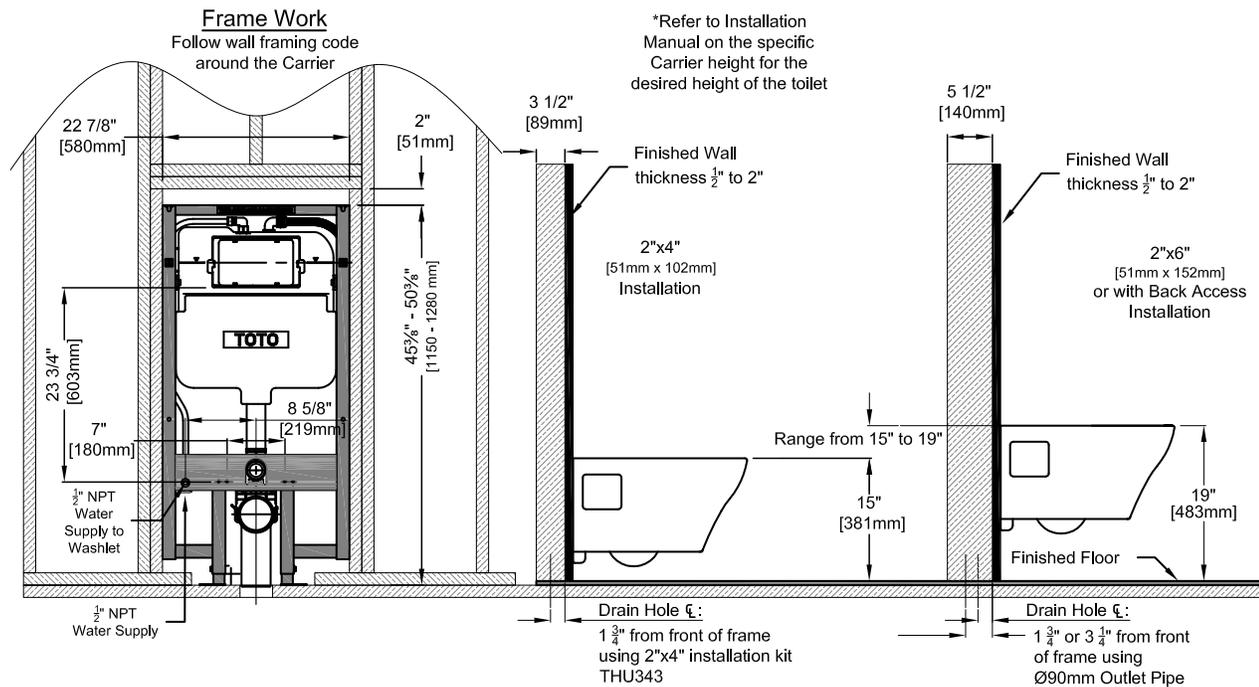

**TOTO**

These dimensions and specifications are subject to change without notice