TRACPipe® TRACPipe® AP TRACPipe® PS II

Product

Key Valve Bracket with Floppy Conduit Adapter Assembly for TracPipe and TracPipe AP Sizes 3/8" - 3/4"

Project Information


Job Name:	Date Submitted:
Location:	Submitted By:
Engineer:	Approved By:
Contractor:	Manufacturer's Rep:

Installation

Must be installed in accordance with the TracPipe Design Guide and Installation Instructions and all applicable codes

Application Information

Use for but not limited to rigid mount of fireplace key valve for TracPipe and TracPipe AP. May be used indoor, outdoor, and in concealed locations. Includes Floppy conduit and adapter for protection.

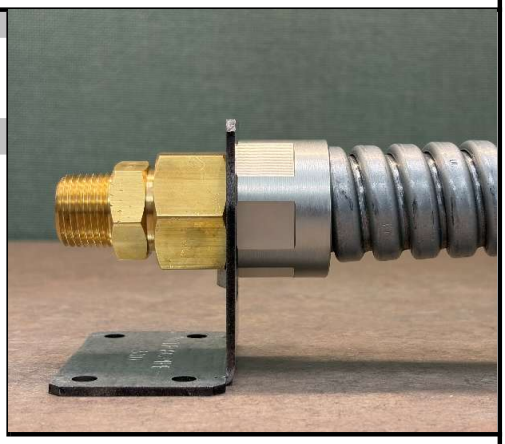

Technical Data

Materials

Nut and Body	Yellow Brass
3/8" - 3/4" Split Rings	Bronze/Brass
Key Valve Bracket	GA Steel
Floppy Conduit Adapter	Zinc-Plated Steel
Floppy Conduit	GA Steel

Pressure Ratings (used with tubing)

Specification Operating Pressure	25 PSIG
CSA International Evaluation Report - Max Operating Pressure, 3/8" through 1"	125 PSIG

Temperature Ratings (used with tubing)

Operating Temperature Range	-20 to 200 Deg F

Codes

ICC Codes (IFGC, IRC, IMC), NFPA 54 / ANSI Z223.1, UPC, CAN/CSA B149.1, NFPA 58

Standards

ANSI LC1 / CSA 6.26, ANSI Z223.1

Listings

CSA, ICC PMG 1058, IAPMO (UPC) File No. 3682

Dimensional Information

✓	*Size*	*P/N*	*Diameter Sleeve Adapter (Nom. in.)*	*Diameter across flats (Nom. in.)*	*Fitting Height (Nom. in.)*	*Plate Size I X W (in.)*	*Male NPT Pipe Size*	*Weight (lbs)*
❒	3/8"	FGP-AF-KVB-375	1-3/8"	1-1/8"	2-3/4"	2" - 1-3/4"	3/8"	1.25
❒	1/2"	FGP-AF-KVB-500	1-9/16"	1-1/4"	2-3/4"	2" - 1-3/4"	1/2"	1.25
❒	3/4"	FGP-AF-KVB750-500	1-13/16"	1-1/2"	2-3/4"	2" - 1-3/4"	3/4"	1.5

Omega Flex, Inc. * 451 Creamery Way * Exton, PA 19341
Tel: 610-524-7272 * Toll Free: 800-671-8622 * Fax: 610-524-7282
www.omegaflex.com

© 2026 Omega Flex, Inc.
TracPipe is a registered trademark of Omega Flex, Inc.